



**Your experts for
safety, facility
and equipment
identification**

Product Catalog

Valve Lockouts

BradyID.com/s36



Valve Lockouts

From universal valve lockouts to pipe blind flange lockouts, Brady offers a full line of devices to lock out a wide variety of valve types and sizes. Our small lockout devices will lock pipes with diameters measuring from 0.5 in. to 3 in., while our large ball valve lockout devices can lock out pipes up to 8 in. diameter.

Butterfly Valve Lockout

- Innovative design to lock out butterfly valves with a lever handle in the OFF position
- Accommodates handle thicknesses of:
Small - 0.125 in. to 2.25 in.
Large - 2 in. to 4 in.

Catalog #	Description
121504	Butterfly Valve Lockout - Small
121505	Butterfly Valve Lockout - Large

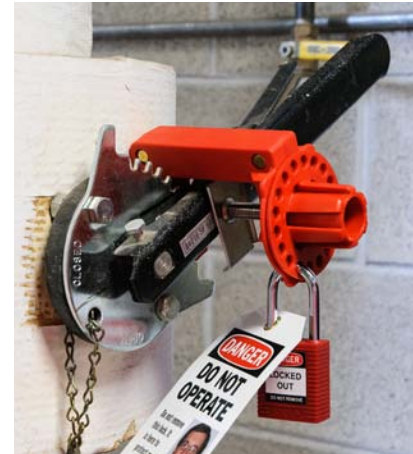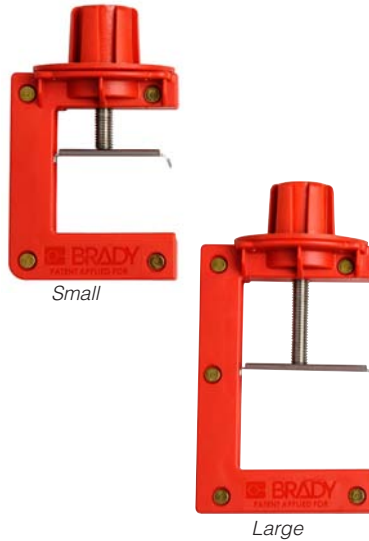


Lockout Tagout

Pipe Blind Flange Lockout Device

- Adjustable locking arm accommodates both standard and recessed bolt positions
- Secures 1 or 2 bolts for extra security
- Versatile to accept up to 4 padlocks
- Heavy-duty construction withstands harsh environments
- UL approved for use in explosive atmospheres

Catalog #	Description	Fits	Qty
149228	Small Blind Flange Lockout	0.5 in. to 3 in. diameter pipes	1
149229	Medium Blind Flange Lockout	3 in. to 14 in. diameter pipes	1
149230	Large Blind Flange Lockout	14 in. to 48 in. diameter pipes	1





Gate Valve Lockouts

- Unique knockout center fits OS&Y or rising stem valves
- Made of rugged injection-molded polypropylene
- Service temps from -25° F to 200° F
- Accepts shackles up to 0.375 in. diameter
- Supplied with English, Spanish and French danger labels

Fits Valve Handles Dia.	Red	Yellow	Green	Blue
1 in. to 2.5 in.	65560	65590	65595	65585
2.5 in. to 5 in.	65561	65591	65596	65586
5 in. to 6.5 in.	65562	65592	65597	65587
6.5 in. to 10 in.	65563	65593	65598	65588
10 in. to 13 in.	65564	65594	65599	65589



Transparent Gate Valve Lockout

- Visually confirms the appropriate position, identifies valve leaks and helps ensure safety
- Constructed of a rugged injection-molded polypropylene
- Service temps from -40° F to 302° F
- Accept shackles up to 0.375 in. diameter

Catalog #	Description	Fits Valve Handles	Qty
145581	Transparent Valve Gate Lockout	1 in. to 2.5 in. dia.	1
145582	Transparent Valve Gate Lockout	2.5 in. to 5 in. dia.	1
145583	Transparent Valve Gate Lockout	5 in. to 6.5 in. dia.	1
145584	Transparent Valve Gate Lockout	6.5 in. to 10 in. dia.	1
145585	Transparent Valve Gate Lockout	10 in. to 13 in. dia.	1



Adjustable Gate Valve Lockout

- Versatile lockout adjusts to fit 1 in. to 6.5 in. valve handles, replacing 3 conventional gate valve lockouts
- Constructed of rugged injection-molded polypropylene
- Service temps from -13° F to 194° F
- Supplied with English, Spanish and French danger labels

Catalog #	Description	Qty
64057	Adjustable Gate Valve Lockout	1



Collapsible Gate Valve Lockout

- Folds into smaller sizes for easy storage
- Cover rotates into fully engaged position
- Rugged injection-molded styrene construction
- 3 device sizes to secure valves up to 18 in. handle diameter

Catalog #	Description	Fits Handles	Qty
148648	Collapsible Gate Valve Lockout	3 in. to 7 in. dia.	1
148647	Collapsible Gate Valve Lockout	7 in. to 13 in. dia.	1
148646	Collapsible Gate Valve Lockout	13 in. to 18 in. dia.	1