




TYPE B




TYPE C

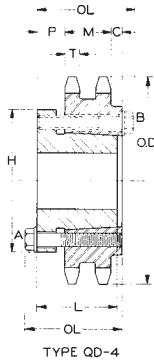

TYPE QD-4



TYPE DB



TYPE DC

Table No. 1 Steel Minimum Bore Single Sprockets

Part No.	DIAMETERS		No. Teeth	Type	BORE		DIMENSIONS				Wt. Lbs.
	Outside	Pitch			Stock	Max.*	T Nom.	L Max.	P	H	
160B8	6.03"	5.226"	8	B	1 1/2"	2 1/4"	1.156"	2 1/4"	1 3/32"	3 1/4"	8.5
160B9	6.70	5.848	9	B	1 1/2	2 3/8	1.156	2 1/4	1 3/32	3 5/8	10.9
160B10	7.36	6.472	10	B	1 1/2	2 3/4	1.156	2 1/4	1 3/32	4 1/8	13.8
160B11	8.01	7.099	11	B	1 1/2	3 1/4	1.156	2 1/2	1 11/32	4 3/4	18.4
160B12	8.66	7.727	12	B	1 1/2	3 3/4	1.156	2 1/2	1 11/32	5 1/2	23.1
160B13	9.31	8.357	13	B	1 1/2	4	1.156	2 5/8	1 15/32	6	28.4
160B14	9.96	8.988	14	B	1 1/2	4 1/2	1.156	2 5/8	1 15/32	6 1/2	33.2
160B15	10.61	9.620	15	B	1 1/2	5 1/4	1.156	2 5/8	1 15/32	7	38.5
160B16	11.25	10.252	16	B	1 1/2	5 1/4	1.156	2 3/4	1 19/32	7	43.0
160B17	11.90	10.885	17	B	1 1/2	5 1/4	1.156	2 3/4	1 19/32	7	46.4
160B18	12.54	11.518	18	B	1 1/2	5 1/4	1.156	2 3/4	1 19/32	7	50.1
160B19	13.19	12.151	19	B	1 1/2	5 1/4	1.156	2 3/4	1 19/32	7	53.9
160B20	13.83	12.785	20	B	1 1/2	5 1/4	1.156	2 3/4	1 19/32	7	58.0
160B21	14.47	13.419	21	B	1 1/2	5 1/4	1.156	2 3/4	1 19/32	7	62.3
160B22	15.11	14.053	22	B	1 1/2	5 1/4	1.156	2 3/4	1 19/32	7 1/8	67.4
160B23	15.75	14.688	23	B	1 1/2	5 1/4	1.156	2 3/4	1 19/32	7 1/8	72.0
160B24	16.39	15.323	24	B	1 1/2	5 1/4	1.156	2 15/16	1 25/32	7 1/8	79.0
160B25	17.03	15.958	25	B	1 1/2	5 1/4	1.156	2 15/16	1 25/32	7 1/8	84.1
160B26	17.67	16.593	26	B	1 1/2	5 1/4	1.156	2 15/16	1 25/32	7 1/8	89.4
160B27	18.31	17.228	27	B	1 1/2	5 1/4	1.156	2 15/16	1 25/32	7 1/8	94.9
160B28	18.95	17.863	28	B	1 1/2	5 1/4	1.156	2 15/16	1 25/32	7 1/8	100.6
160B30	20.23	19.134	30	B	1 1/2	5 1/4	1.156	2 15/16	1 25/32	7 1/8	112.7
160C35	23.42	22.312	35	C	1 1/2	5 1/2	1.156	4 1/4	1 35/64	8	169.8
160C40	26.61	25.491	40	C	1 1/2	5 1/2	1.156	4 1/4	1 35/64	8	208.8
160C45	29.80	28.671	45	C	1 1/2	5 1/2	1.156	4 1/4	1 35/64	8	253.1
160C54	35.54	34.397	54	C	1 1/2	5 1/2	1.156	5	1 59/64	8	356.2
160C60	39.36	38.215	60	C	1 1/2	5 1/2	1.156	5	1 59/64	8	427.4
160C70	45.73	44.578	70	C	1 1/2	5 1/2	1.156	5	1 59/64	8	562.8
160C80	52.10	50.943	80	C	1 1/2	5 1/2	1.156	5 1/2	2 11/64	9	742.3

\* Maximum bores shown will accommodate standard keyway and setscrew over keyway. Slightly larger bores are possible with no keyway, shallow keyway or setscrew at angle to keyway. These sprockets are furnished with minimum bore and no keyway. They can be rebored to size, keywayed and setscrewed for a reasonable extra charge.

Table No. 2 Steel Double Sprockets with Q-D® Bushings

Part No.	Bushing	Bore Range	DIAMETERS		Type	No. Teeth	DIMENSIONS						Wt. Less Bushing	
			Outside	Pitch			T	M	OL	L	P	C		H
D160M35*	M	2 - 5 1/2"	23.42"	22.312"	QD-4	35	1.119"	3.424"	7 15/32"	6 3/4"	2 15/64"	1 5/32"	9"	343
D160N45*	N	2 7/16 - 5 7/8	29.80	28.671	QD-4	45	1.119	3.424	9 1/8	8 1/8	2 3/4	2 11/64	10	384
D160N60*	N	2 7/16 - 5 7/8	39.36	38.215	QD-4	60	1.119	3.424	9 1/8	8 1/8	2 3/4	2 11/64	10	570

\*Bushing mounts with capscrews on "B" side only.

Table No. 3 Steel Minimum Bore Double Sprockets

Part No.	DIAMETERS		No. of Teeth	Type	BORE		DIMENSIONS				Wt. (lbs.)	
	Outside	Pitch			Stock	Max.*	T	M	L Max.	P		H
D160B13	9.31	8.357	13	DB	1 1/2	4	1.119	3.424	4 3/4	1 21/64	6	52.7
D160B14	9.96	8.988	14	DB	1 1/2	4 3/4	1.119	3.424	4 3/4	1 21/64	6 3/4	63.2
D160B15	10.61	9.620	15	DB	1 1/2	5 1/4	1.119	3.424	4 3/4	1 21/64	7 3/8	74.0
D160B16	11.26	10.252	16	DB	1 1/2	5 1/4	1.119	3.424	4 3/4	1 21/64	7 3/8	82.9
D160B17	11.90	10.885	17	DB	1 1/2	5 1/4	1.119	3.424	4 3/4	1 21/64	7 3/8	92.4
D160B18	12.54	11.518	18	DB	1 1/2	5 1/4	1.119	3.424	4 3/4	1 21/64	7 3/8	102
D160B19	13.19	12.151	19	DB	1 1/2	5 1/4	1.119	3.424	4 3/4	1 21/64	7 3/8	113
D160B20	13.83	12.785	20	DB	1 1/2	5 7/16	1.119	3.424	4 3/4	1 21/64	7 3/4	126
D160B21	14.47	13.419	21	DB	1 1/2	5 7/16	1.119	3.424	4 3/4	1 21/64	7 3/4	138
D160B22	15.11	14.053	22	DB	1 1/2	5 7/16	1.119	3.424	4 3/4	1 21/64	7 3/4	151
D160B23	15.75	14.688	23	DB	1 1/2	5 7/16	1.119	3.424	4 3/4	1 21/64	7 3/4	164
D160B24	16.39	15.323	24	DB	1 1/2	5 7/16	1.119	3.424	4 3/4	1 21/64	7 3/4	176
D160B25	17.03	15.958	25	DB	1 1/2	5 7/16	1.119	3.424	4 3/4	1 21/64	7 3/4	192
D160B26	17.67	16.593	26	DB	1 1/2	5 7/16	1.119	3.424	4 3/4	1 21/64	7 3/4	207
D160C35	23.42	22.312	35	DC	1 1/2	6 3/4	1.119	3.424	6 5/8	1 19/32	9 3/4	419
D160C45	29.80	28.671	45	DC	1 1/2	7	1.119	3.424	7 1/8	1 27/32	10	458
D160C60	39.36	38.215	60	DC	1 1/2	7	1.119	3.424	7 1/8	1 27/32	10	611

\* Maximum bores shown will accommodate standard keyway and setscrew over keyway. Slightly larger bores are possible with no keyway, shallow keyway or setscrew at angle to keyway. These sprockets are furnished with minimum bore and no keyway. They can be rebored to size, keywayed and setscrewed for a reasonable extra charge.