


Table No. 1 **Sprockets for No. 60, 3/4" Pitch ANSI Chain**

Part No.	Bushing	Bore Range	Diameter		No. of Teeth	Type	T (Nom.)	L	H	Wt. Lbs. Less Bush
			Outside	Pitch						
H60TB11	1008	1/2 - 1	3.00	2.662	11	1	.459	7/8	1 13/16	0.8
H60TB12	1008	1/2 - 1	3.25	2.898	12	1	.459	7/8	1 15/16	1.0
H60TB13	1210	1/2 - 1 1/4	3.49	3.134	13	1	.459	1	2 21/32	1.1
H60TB14	1210	1/2 - 1 1/4	3.74	3.370	14	1	.459	1	2 15/16	1.4
H60TB15	1610	1/2 - 1 5/8	3.98	3.607	15	1	.459	1	3 1/8	1.5
H60TB16	1610	1/2 - 1 5/8	4.22	3.844	16	1	.459	1	3	1.8
H60TB17	1610	1/2 - 1 5/8	4.46	4.082	17	1	.459	1	3 1/4	2.2
H60TB18	1610	1/2 - 1 5/8	4.70	4.319	18	1	.459	1	3	3.0
H60TB19	1610	1/2 - 1 5/8	4.94	4.557	19	1	.459	1	3	3.2
H60TB20	2012	1/2 - 2	5.19	4.794	20	1	.459	1 1/4	3 7/8	2.6
H60TB21	2012	1/2 - 2	5.43	5.032	21	1	.459	1 1/4	3 7/8	2.8
H60TB22	2012	1/2 - 2	5.67	5.270	22	1	.459	1 1/4	3 7/8	3.4
H60TB23	2012	1/2 - 2	5.91	5.508	23	1	.459	1 1/4	3 7/8	3.7
H60TB24	2012	1/2 - 2	6.15	5.746	24	1	.459	1 1/4	3 7/8	4.0
H60TB25	2012	1/2 - 2	6.39	5.984	25	1	.459	1 1/4	3 7/8	4.2
H60TB26	2012	1/2 - 2	6.63	6.222	26	1	.459	1 1/4	3 7/8	4.5
H60TB27	2012	1/2 - 2	6.87	6.460	27	1	.459	1 1/4	3 7/8	4.6
H60TB28	2012	1/2 - 2	7.11	6.699	28	1	.459	1 1/4	3 7/8	5.5
H60TB30	2012	1/2 - 2	7.59	7.175	30	1	.459	1 1/4	3 7/8	6.1
60TB32	2012	1/2 - 2	8.06	7.652	32	1	.459	1 1/4	3 7/8	6.8
60TB35	2012	1/2 - 2	8.78	8.367	35	1	.459	1 1/4	3 7/8	8.3
60TB36	2012	1/2 - 2	9.02	8.605	36	1	.459	1 1/4	3 7/8	8.9
60TB40	2012	1/2 - 2	9.98	9.559	40	1	.459	1 1/4	3 7/8	10.7
60TB42	2012	1/2 - 2	10.46	10.036	42	1	.459	1 1/4	3 7/8	11.3
60TB45	2012	1/2 - 2	11.18	10.752	45	1	.459	1 1/4	3 7/8	12.8
60TB48	2012	1/2 - 2	11.89	11.467	48	1	.459	1 1/4	3 7/8	14.2
60TB54	2517	1/2 - 2 1/2	13.33	12.899	54	1	.459	1 3/4	4 1/4	19.2
60TB60	2517	1/2 - 2 1/2	14.76	14.330	60	1	.459	1 3/4	4 1/4	22.9
60TB70	2517	1/2 - 2 1/2	17.15	16.717	70	1	.459	1 3/4	4 1/4	29.0
60TB72	2517	1/2 - 2 1/2	17.63	17.194	72	1	.459	1 3/4	4 1/4	30.7
60TB80	2517	1/2 - 2 1/2	19.54	19.104	80	1	.459	1 3/4	4 1/4	38.5
60TB84	2517	1/2 - 2 1/2	20.49	20.058	84	1	.459	1 3/4	4 1/4	42.5



Type 3

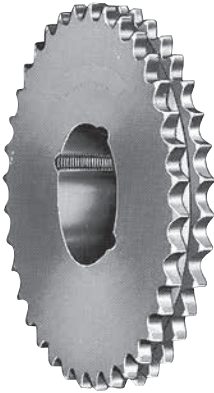


Table No. 2 **Steel Double Sprockets**

Part No.	Bushing	Bore Range	Diameter		No. of Teeth	Type	T (Nom.)	L	H	Wt. Lbs. Less Bush
			Outside	Pitch						
D60TB13	1215	1/2 - 1 1/4	3.49	3.134	13	2	.444	1 1/2	2 19/64	1.2
D60TB14	1215	1/2 - 1 1/4	3.74	3.370	14	2	.444	1 1/2	2 35/64	1.6
D60TB15	1615	1/2 - 1 5/8	3.98	3.607	15	2	.444	1 1/2	3 25/32	1.3
D60TB16	1615	1/2 - 1 5/8	4.22	3.844	16	2	.444	1 1/2	3 1/32	1.8
D60TB17	1615	1/2 - 1 5/8	4.46	4.082	17	2	.444	1 1/2	3 17/64	2.3
D60TBA18	2012	1/2 - 2	4.70	4.319	18	3	.444	1 1/4	-	1.9
D60TBA19	2012	1/2 - 2	4.94	4.557	19	3	.444	1 1/4	-	2.3
D60TB20	2517	1/2 - 2 1/2	5.19	4.794	20	2	.444	1 3/4	3 63/64	1.6
D60TB21	2517	1/2 - 2 1/2	5.43	5.032	21	2	.444	1 3/4	4 15/64	2.4
D60TB25	2517	1/2 - 2 1/2	6.39	5.984	25	2	.444	1 3/4	5 3/16	6.1
D60TB30	2517	1/2 - 2 1/2	7.59	7.175	30	2	.444	1 3/4	6 25/64	11.5
D60TB36	2517	1/2 - 2 1/2	9.02	8.605	36	2	.444	1 3/4	4 1/4	17.5
D60TB42	2517	1/2 - 2 1/2	10.46	10.036	42	2	.444	1 3/4	4 1/4	25.5
D60TB45	2517	1/2 - 2 1/2	11.18	10.752	45	2	.444	1 3/4	4 1/4	29.5
D60TB52	2517	1/2 - 2 1/2	12.85	12.422	52	2	.444	1 3/4	4 1/4	41.0
D60TB60	2517	1/2 - 2 1/2	14.76	14.330	60	2	.444	1 3/4	4 1/4	32.5
D60TB68	2517	1/2 - 2 1/2	16.67	16.240	68	2	.444	1 3/4	4 1/2	36.5
D60TB76	3020	15/16 - 3	18.58	18.149	76	2	.444	2	5 1/4	42.5
D60TB95	3020	15/16 - 3	23.12	22.684	95	2	.444	2	5 1/4	48.5