




GE  
Lighting

## 25426 - F13T5/WW/CARD

### GE kitchen & bath 13 watt T5 1-pack

- GE's Warm White Thin Line lights are ideal for display or shelf lighting and under cabinets.
- 0.6 inch diameter T5 with miniature bi-pin (g5) base
- 3000K warm white light appearance
- For use in kitchens, bathrooms, and living areas
- GE kitchen & bath fluorescent bulbs deliver a warmer tone to create a comfortable and inviting atmosphere. These warm white bulbs are best for living areas throughout your home, hotels, commercial restrooms, reception areas and food preparation
- Lasts 2.3 years based on 6 hours per day usage
- Warm, inviting light that complements any decor
- 21 inches long

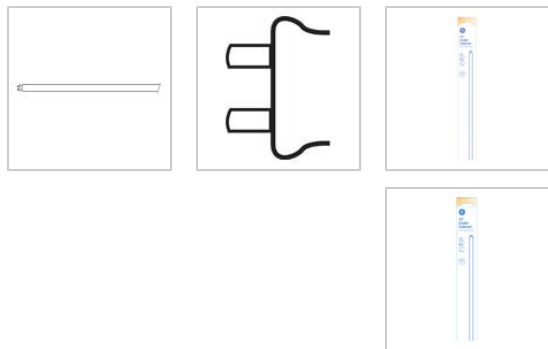

#### CAUTIONS & WARNINGS

##### Caution


- Lamp may shatter and cause injury if broken
  - Wear safety glasses and gloves when handling lamp.
  - Do not use excessive force when installing lamp.

##### Warning

- Risk of Electric Shock
    - Turn power off before inspection, installation or removal.
- \*Two year life based on rated life at 6 hours/day.

#### GRAPHS & CHARTS

##### Graphs\_Lamp Mortality

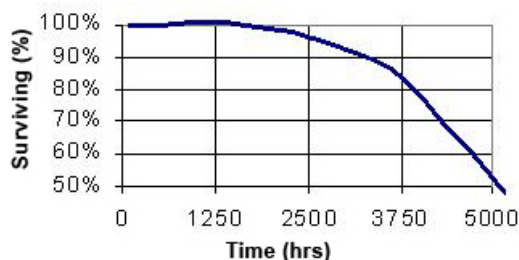

#### GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T5
Base	Miniature Bi-Pin (G5)
Rated Life (NOM)	5000.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	6.0 mg
Picograms of Mercury (NOM)	1666.7 pg
Primary Application	Kitchen & Bath

#### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	870.0
Mean Lumens (NOM)	720.0
Nominal Initial Lumens per Watt (NOM)	66.92308
Color Temperature (NOM)	3000.0 K
Color Rendering Index (CRI) (NOM)	52.0

#### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	13.0
Open Circuit Voltage (rapid start) (MAX)	400.0 V
Open Circuit Voltage (rapid start) Min @ Temperature	180 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

#### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	21.000 in(533.4 mm)
Nominal Length (NOM)	21.000 in(533.4 mm)
Bulb Diameter (DIA) (MIN)	0.530 in(13.5 mm)
Bulb Diameter (DIA) (MAX)	0.630 in(16.0 mm)
Bulb Diameter (DIA) (NOM)	0.625 in(15.9 mm)
Max Base Face to Base Face (A) (NOM)	20.350 in(516.9 mm)
Face to End of Opposing Pin (B) (MIN)	20.530 in(521.5 mm)
Face to End of Opposing Pin (B) (MAX)	20.630 in(524.0 mm)

#### PRODUCT INFORMATION

Product Code	25426
Description	F13T5/WW/CARD
ANSI Code	2005-1
Standard Package	Case
Standard Package GTIN	10043168254264
Standard Package Quantity	5
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	5
UPC	043168254267

