


# Carlon® Hal-Free Riser-Gard®

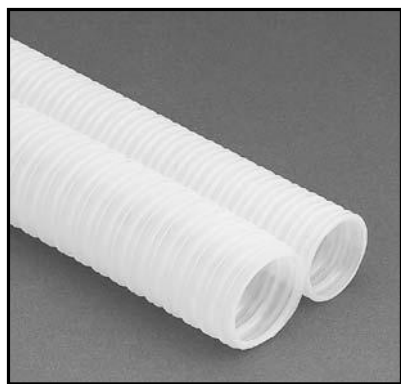

**UL** US  
LISTED  
E143102  
FT-4 Rated

**Applications:** Riser and General Purpose

**Hal-Free Riser-Gard** is a halogen free nonmetallic flexible raceway for use in riser and general purpose applications. In the event of a fire, this product will not release halogen elements into the air, which makes it ideal for applications in tunnels, laboratories and high-tech environments.

Hal-Free Riser-Gard is listed to UL 2024 in accordance with NEC Articles 725, 770, 800 and 820.

Custom lengths and split ducts are available upon request. Hal-Free Riser-Gard is available in white only.

## Features:

- Free from halogen elements
- Compliant with NEC Articles 725, 770, 800 and 820
- Available in sizes 1" through 2"
- Available in white only
- Sequentially marked footage

## Technical Info:

UL Listed to 2024	Test Method	Maximum Value
Maximum Flame Propagation	UL 2024	3'6"
Maximum Air Temperature	UL 2024	387°F

- Storage and Handling -4°F to 150°F
- No UV protection (not suitable for outdoor use)
- Do NOT store outside

## Standard Stock – Reels

Size	Color	Part No.	Nom. I.D.	Nom. O.D.	Pull Tape	Reel Size (F x W)	Reel Type	Reel length (ft.)	Reel Wt. (lbs.)	Product Wt. per 100 ft. (lbs.)
1"	White	HF4X4C-5000	1.049	1.365	900 lb.	72" x 41"	W	5000	310	7.5
1 1/4"	White	HG4X4C-4000	1.250	1.550	900 lb.	72" x 41"	W	4000	310	7.5
1 1/2"	White	HH4X4C-2000	1.500	1.850	900 lb.	66" x 41"	W	2000	250	12
2"	White	HJ4X4C-2000	2.000	2.425	900 lb.	82" x 41"	W	2000	365	21

W = Wood

## Custom Orders

How to Build a Part Number:						
Position 1 Product	Position 2 Size	Position 3 Configuration	Position 4 Wall	Position 5 Color	Position 6 Pull Line	Position 7 Length
H = Hal-Free	F = 1" G = 1-1/4" H = 1-1/2" J = 2"	4 = Corrugated	X = Standard	4 = White	C = 900 lb. Tape	Example -1000 = Feet -1000S = 1000 Feet Split

- Custom Orders are not returnable
- Custom lengths are available in minimum order quantities of 1000 ft.