


Inch Cam Follower Bearings **MCGILL®**

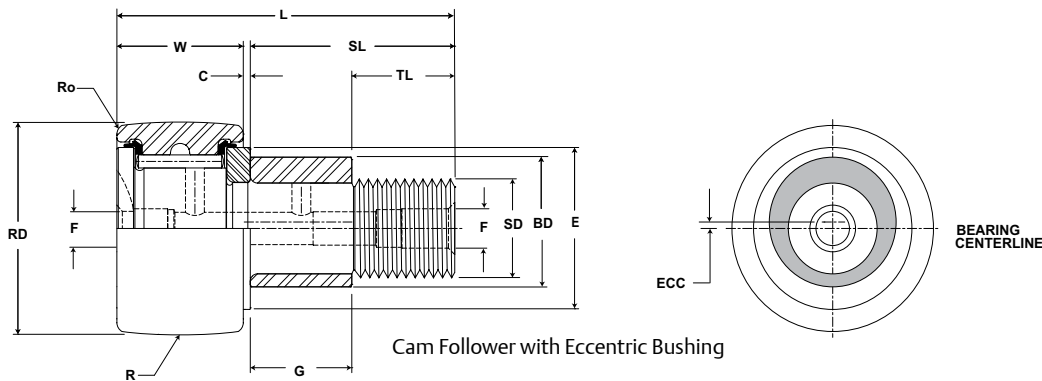

CF, CFE, CFH

Part No.		HC	HD	F	E	Ro	HBD		Thread Type	Clamping Torque	Limiting Speed (Grease)	WT	
W/O Seals	With LUBRI-DISC Seals	Hole Center	Radial Hole Diameter	Axial Hole Dia or Fitting	Min Boss Diameter	Outer Corner	Housing Bore Diameter					Bearing Weight	
		inch mm			inch mm		inch mm			lb kg			
		(Ref)	(Ref)	(Ref)	(Ref)	(Ref)	Nom.	Tol.					
CF 1 1/4	CF 1 1/4 S	.3125 8	.0938 2	.1875 5	.984 25.00	.031 .79	.5003 12.708	+.0002/- .0003 +.0005/- .0008	1/2-20	350 40	3,100	.30 .14	
CF 1 1/4 B	CF 1 1/4 SB					N/A							
CCF 1 1/4	CCF 1 1/4 S					.031 .79	.690 17.52	+.001/- .001 +.025/- .025					
CCF 1 1/4 B	CCF 1 1/4 SB												N/A
CFE 1 1/4	CFE 1 1/4 S	.3125 8	.0938 2	.1875 5	.984 25.00	.031 .79	.690 17.52	+.001/- .001 +.025/- .025	1/2-20	350 40	3,100	.30 .14	
CFE 1 1/4 B	CFE 1 1/4 SB					N/A							
CCFE 1 1/4	CCFE 1 1/4 S					.031 .79	.690 17.52	+.001/- .001 +.025/- .025					
CCFE 1 1/4 B	CCFE 1 1/4 SB												N/A
CFH 1 1/4	CFH 1 1/4 S	.3125 8	.0938 2	.1875 5	.984 25.00	.031 .79	.7503 19.058	+.0002/- .0003 +.0005/- .0008	3/4-16	1,250 141	3,100	.38 .17	
CFH 1 1/4 B	CFH 1 1/4 SB					N/A							
CCFH 1 1/4	CCFH 1 1/4 S					.031 .79	.7503 19.058	+.0002/- .0003 +.0005/- .0008					
CCFH 1 1/4 B	CCFH 1 1/4 SB												N/A
CF 1 3/8	CF 1 3/8 S	.3125 8	.0938 2	.1875 5	.984 25.00	.047 1.19	.5003 12.708	+.0002/- .0003 +.0005/- .0008	1/2-20	350 40	2,800	.35 .16	
CF 1 3/8 B	CF 1 3/8 SB					N/A							
CCF 1 3/8	CCF 1 3/8 S					.047 1.19	.690 17.52	+.001/- .001 +.025/- .025					
CCF 1 3/8 B	CCF 1 3/8 SB												N/A
CFE 1 3/8	CFE 1 3/8 S	.3125 8	.0938 2	.1875 5	.984 25.00	.047 1.19	.690 17.52	+.001/- .001 +.025/- .025	1/2-20	350 40	2,800	.35 .16	
CFE 1 3/8 B	CFE 1 3/8 SB					N/A							
CCFE 1 3/8	CCFE 1 3/8 S					.047 1.19	.690 17.52	+.001/- .001 +.025/- .025					
CCFE 1 3/8 B	CCFE 1 3/8 SB												N/A
CFH 1 3/8	CFH 1 3/8 S	.3125 8	.0938 2	.1875 5	.984 25.00	.047 1.19	.7503 19.058	+.0002/- .0003 +.0005/- .0008	3/4-16	1,250 141	2,800	.44 .19	
CFH 1 3/8 B	CFH 1 3/8 SB					N/A							
CCFH 1 3/8	CCFH 1 3/8 S					.047 1.19	.7503 19.058	+.0002/- .0003 +.0005/- .0008					
CCFH 1 3/8 B	CCFH 1 3/8 SB												N/A

For positive clamping, use housing thickness equal to G dimension $\pm .010$ ".
Clamping torque is based on dry threads. If threads are lubricated, use half of value shown.
Hex wrench size for "Broached" version is located in the wrench size chart on page B-158.