

# PEER-LIFT® MECHANICAL COUPLING LINKS

---

Peer-Lift® Mechanical Coupling Links are an essential component of mechanically coupled slings. Used to assemble chain legs to the master link and/or attach eye type fittings. Tested at twice the Working Load Limit, this Grade 80 coupling link will provide a safe and reliable sling assembly. Peer-Lift® Mechanical Coupling Link is an industry recognized product that meets or exceeds ASTM A952 and OSHA 1910 standards.



# PEER-LIFT® MECHANICAL COUPLING LINKS

---

## GRADE

- 80

## FINISH

- Black Enamel

## STANDARDS

- Meets or exceeds ASTM A952 and OSHA 1910 standards

## HEAT TREATMENT

- Quenched and tempered before proof testing
- Proof tested at twice the Working Load Limit

## LINK TYPE

- Mechanical Coupling Link
- For connecting hooks, chain, and other lifting components

## APPLICATION

- Overhead Lifting

## MATERIAL


- Premium Fine Grain Alloy Steel



# PEER-LIFT® MECHANICAL COUPLING LINKS

---

## DIAGRAM DRAWINGS

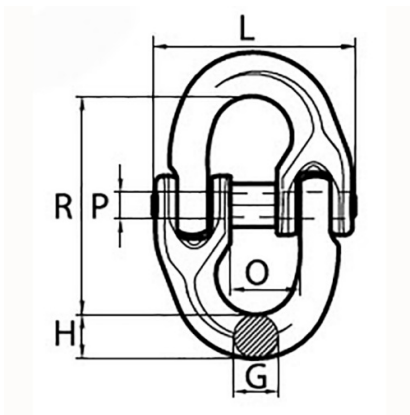

# PEER-LIFT® MECHANICAL COUPLING LINKS

## PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Dim G (in.)	Dim H (in.)	Dim O (in.)	Dim R (in.)	Dim P x L (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8053755	1	26	1.24	1.24	2.36	5.79	0.71 x 6.23	9.48	47700
8053855	1-1/4	32	1.26	1.57	3.15	7.64	0.98 x 7.68	17.75	72300
8453180	5/16	8	0.39	0.45	0.71	2.42	0.25 x 2.09	0.42	4500
8453280	9/32	7	0.5	0.39	0.67	2.00	0.24 x 1.85	0.26	3500
8453380	3/8	10	0.50	0.54	0.89	2.83	0.31 x 2.48	0.84	7100
8453480	1/2	13	0.66	0.75	1.08	3.46	0.39 x 3.11	1.61	12000
8453580	5/8	16	0.83	0.83	1.30	4.06	0.55 x 4.17	3.15	18100
8453680	3/4	20	0.93	1.16	1.63	4.53	0.63 x 4.84	5.84	28300
8453780	7/8	22	1.06	1.14	1.91	5.31	0.63 x 5.91	8.27	34200

