



# PAR30/PAR20 LED

## 12PAR30S/LED/830/F25 DIM AF SO-B 6/1

Philips PAR30 and PAR20 LED Single Optic Lamps provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

### Product data

General Information	
Base	E26 [ Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	12-75W
Light Technical	
Color Code	830 [ CCT of 3000K]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	900 lm
Luminous Flux (Rated) (Nom)	900 lm
Luminous Intensity (Nom)	5300 cd
Color Designation	White (WH)
Rated Beam Angle	25 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	75 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	12 W
Lamp Current (Nom)	121 mA
Starting Time (Nom)	0.5 s


Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.85
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	89 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Suitable For Accent Lighting	Yes
Energy Certifications	Energy Star
Product Data	
Order product name	12 PAR30S/F25 3000 DIM Black
EAN/UPC - Product	046677459659
Order code	459651
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001193804
Net Weight (Piece)	0.001 kg

# PAR30/PAR20 LED

## Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.
- CAUTION: Risk of electric shock— do not use where directly exposed to water
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005.



## Dimensional drawing




PAR30S 12W-75W 900lm 25D 3000K E26 D

Product	D	C
12 PAR30S/F25 3000 DIM Black	92 mm	92.7 mm

## Photometric data

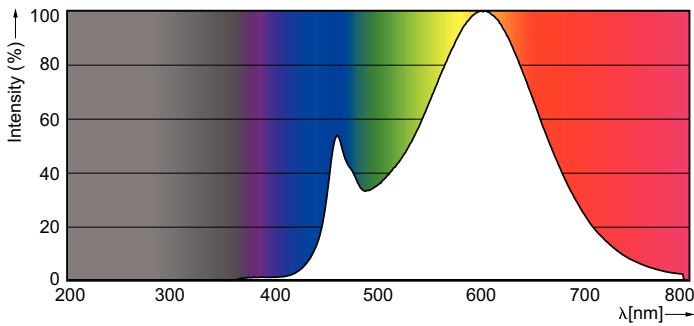

LEDspot, PAR30S 12W-75W 25D 3000K E26 120V

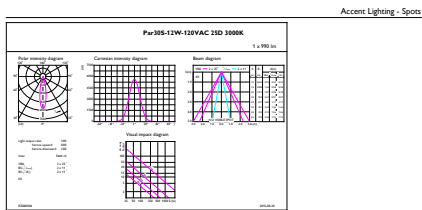

LEDspot, PAR30S 12W-75W 25D 3000K E26 120V

## PAR30/PAR20 LED

