




Duty: Medium
Rolling Elements: Ball
Lock: Double Setscrew
Seal: Felt
Optional Seal: Contact
Temperature: -20° to 220°F

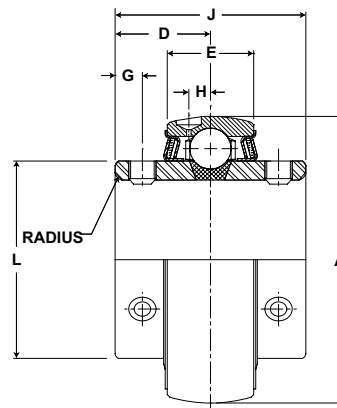

Medium Duty Bearing Insert – Double Setscrew

Bore Diameter inch	Part No.	Basic Dynamic Rating lb/N	Dimensions inch / mm							Max Rad. To Clear	Setscrew Thread	Unit Wt. lb/kg
			A	D	E	G	H	L	J			
1	3-1D	4381 19487	2.4409 62	7/8 22.2	7/8 22.2	7/32 5.6	7/32 5.6	1 19/32 40.5	1 3/4 44.5	.040 1.02	1/4-28	1.0 .45
1 3/16	3-13D	5782	2.8346 72	1 25.4	15/16 23.8	1/4 6.4	1/4 6.4	1 55/64 47.2	2 50.8	.040 1.02	5/16-24	1.5 .68
1 7/16	3-17D	7340 32648	3.1496 80	1 5/32 29.4	1 3/32 27.8	31/99 8.0	19/64 7.5	2 1/16 52.4	2 5/16 58.7	.062 1.57	5/16-24	2.0 .91
1 1/2	3-18D	7901	3.3470 85	1 3/16 30.2	1 3/32 27.8	11/32 8.7	19/64 7.5	2 19/64 58.3	2 3/8 60.3	.062 1.57	5/16-24	2.5 1.13
1 11/16	3-111D	7889	3.5433	1 1/4	1 1/8	11/32	17/64	2 15/32	2 1/2	.062	3/8-24	2.7
1 3/4	3-112D	35090	90	31.8	28.6	8.7	6.7	62.7	63.5	1.57		1.22
1 15/16	3-115D	9752	3.9370 100	1 5/16 33.3	1 3/16 30.2	31/99 8.0	19/64 7.5	2 23/32 69.1	2 5/8 66.7	.080 2.03	3/8-24	3.5 1.59
2 7/16	3-27D	13971	4.9207	1 3/4	1 3/8	15/32	3/8	3 7/16	3 1/2	.080	7/16-20	7.1
2 1/2	3-28D	62143	125	44.5	34.9	11.9	9.5	87.3	88.9	2.03		3.22
2 11/16	3-211D	14839	5.1181 130	1 3/4 44.5	1 1/2 38.1	39/99 11.1	3/8 9.5	3 41/64 92.5	3 1/2 88.9	.080 2.03	1/2-20	7.3 3.31
2 15/16	3-215D	17412	5.5118	1 15/16	1 11/16	49/87	13/32	3 59/64	3 7/8	.120	1/2-20	9
3	3-3D	77449	140	49.2	42.9	14.3	10.3	99.6	98.4	3.05		4.08
3 3/16	3-33D	18681	5.9055 150	2 1/32 51.6	1 15/16 49.2	1/2 12.7	17/32 13.5	4 5/32 105.6	4 1/16 103.2	.120 3.05	1/2-20	10.8 4.90
3 7/16	3-37D	21566 95926	6.2992 160	2 7/32 56.4	2 50.8	1/2 12.7	15/32 11.9	4 25/64 111.5	4 7/16 112.7	.120 3.05	1/2-20	12.6 5.72
3 15/16	3-315D	29905	7.4803	2 11/16	2 1/2	64/89	19/32	5 11/64	5 3/8	.120	5/8-18	21.6
4	3-4D	133017	190	68.3	63.5	18.3	15.1	131.4	136.5	3.05		9.80
4 7/16	3-47D	37482	9.0551	2 7/8	2 5/8	5/8	5/8	6 11/32	5 3/4	.120	5/8-18	40
4 15/16	3-415D	166720	230	73.0	66.7	15.9	15.9	161.1	146.1	3.05		18.14

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.