



Duty: Standard

Rolling Elements: Ball

Housing: Cast Iron Pillow Block – High Base


Self Alignment: +/- 2 Degrees

Lock: Double Setscrew

Seal: Felt

Optional Seal: Contact

Temperature: -20° to 220°F

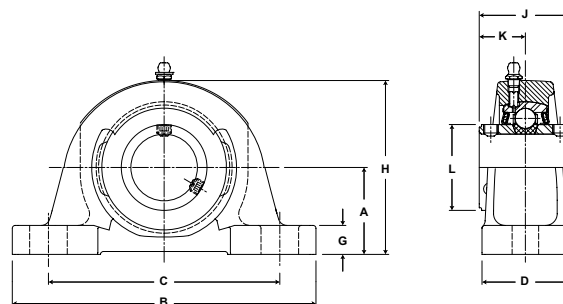

NPD Series Standard Duty Pillow Blocks With Double Lock - Setscrew Locking

Bore Diameter	Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch / mm										Bolt Size	Unit Wt. lb/kg
				A	B	C		D	G	H	J	K	L		
						min.	max.								
7/8 15/16 1	NPD-14 NPD-15 NPD-16	2-014D 2-015D 2-1D	2801 12459	1 7/16 36.5	5 1/2 139.7	3 7/8 98.4	4 3/8 111.1	1 1/2 38.1	1/2 12.7	2 13/16 71.4	1 1/2 38.1	3/4 19.1	1 3/8 34.9	3/8	2.4 1.09
1 3/16	NPD-19	2-13D	4381 19487	1 11/16 42.9	6 1/2 165.1	4 7/16 112.7	5 1/16 128.6	1 7/8 47.6	9/16 14.3	3 3/8 85.7	1 3/4 44.5	7/8 22.2	1 19/32 40.5	1/2	3.8 1.72
1 1/4 1 3/8 1 7/16	NPD-20 NPD-22 NPD-23	2-14D 2-16D 2-17D	5782 25718	1 7/8 47.6	6 9/16 166.7	4 11/16 119.1	5 5/16 134.9	1 7/8 47.6	5/8 15.9	3 3/4 95.3	2 50.8	1 25.4	1 55/64 47.2	1/2	4.7 2.13
1 1/2 1 9/16	NPD-24 NPD-25	2-18D 2-19D	7340 32648	1 15/16 49.2	7 1/4 184.2	4 7/8 123.8	5 7/8 149.2	2 1/8 54.0	11/16 17.5	3 15/16 100.0	2 5/16 58.7	1 5/32 29.4	2 1/16 52.4	1/2	6.0 2.73
1 11/16 1 3/4	NPD-27 NPD-28	2-111D 2-112D	7901 35144	2 1/8 54.0	7 1/2 190.5	5 7/16 138.1	6 1/16 154.0	2 1/8 54.0	11/16 17.5	4 1/4 108.0	2 3/8 60.3	1 3/16 30.2	2 19/64 58.3	1/2	6.5 2.95
1 7/8 1 15/16	NPD-30 NPD-31	2-114D 2-115D	7889 35090	2 1/4 57.2	8 1/8 206.4	6 152.4	6 1/2 165.1	2 3/8 60.3	3/4 19.1	4 9/16 115.9	2 1/2 63.5	1 1/4 31.8	2 15/32 62.7	5/8	8.3 3.76
2 2 1/8 2 3/16	NPD-32 NPD-34 NPD-35	2-2D 2-22D 2-23D	9752 43377	2 1/2 63.5	8 5/8 219.1	6 1/2 165.1	7 177.8	2 3/8 60.3	3/4 19.1	5 127.0	2 5/8 66.7	1 5/16 33.3	2 23/32 69.1	5/8	10.0 4.54
2 1/4 2 3/8 2 7/16	NPD-36 NPD-38 NPD-39	2-24D 2-26D 2-27D	11789 52437	2 3/4 69.9	9 1/2 241.3	6 7/8 174.6	7 5/8 193.7	2 3/4 69.9	7/8 22.2	5 9/16 141.3	3 1/8 79.4	1 9/16 39.7	2 63/64 75.8	5/8	14.0 6.35

For Standard Duty Bearing Inserts-Double Lock see page G-94.

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.