



Duty: Medium

Rolling Elements: Ball

Housing: Cast Iron Four Bolt Pillow Block - High Base


Self Alignment: +/- 2 Degrees

Lock: Double Setscrew

Seal: Felt

Optional Seal: Contact

Temperature: -20° to 220°F

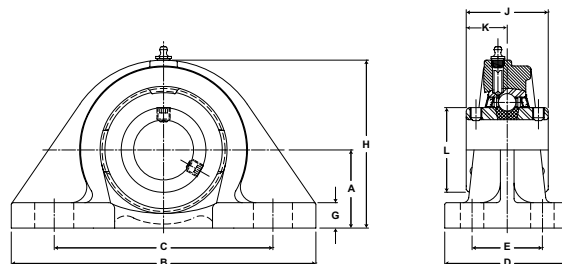

MFPD Series Medium Duty Four-Bolt Base Pillow Blocks With Double Lock - Setscrew Locking

Bore Diameter inch	Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch / mm											Bolt Size	Unit Wt. lb/kg
				A	B	C		D	E	G	H	J	K	L		
						min.	max.									
1 15/16	MFPD-31	3-115D	9752 43377	2 1/2 63.5	9 3/4 247.7	6 3/8 161.9	7 5/8 193.7	4 101.6	2 1/4 57.2	13/16 20.6	5 3/8 136.5	2 5/8 66.7	1 5/16 33.3	2 23/32 69.1	5/8	13.7 6.21
2 3/16	MFPD-35	3-23D	11789 52437	2 3/4 69.9	10 1/4 260.4	6 7/8 174.6	8 1/8 206.4	4 1/8 104.8	2 1/4 57.2	7/8 22.2	5 13/16 147.6	3 1/8 79.4	1 9/16 39.7	2 63/64 75.8	5/8	17 7.71
2 7/16	MFPD-39	3-27D	13971	3	11 1/4	7 1/2	9	4 1/2	2 5/8	1	6 1/2	3 1/2	1 3/4	3 7/16	5/8	23.3
2 1/2	MFPD-40	3-28D	62143	76.2	285.8	190.5	228.6	114.3	66.7	25.4	165.1	88.9	44.5	87.3	5/8	10.57
2 11/16	MFPD-43	3-211D	14839 66004	3 1/2 88.9	13 330.2	9 228.6	10 1/2 266.7	5 127.0	2 3/4 69.9	1 1/8 28.6	7 1/4 184.2	3 1/2 88.9	1 3/4 44.5	3 41/64 92.5	3/4	34 863.6
2 15/16	MFPD-47	3-215D	17412	3 1/2	13	9	10 1/2	5	2 3/4	1	7 3/8	3 7/8	1 15/16	3 59/64	3/4	36.5
3	MFPD-48	3-3D	77449	88.9	330.2	228.6	266.7	127.0	69.9	25.4	187.3	98.4	49.2	99.6	3/4	16.56
3 7/16	MFPD-55	3-37D	21566	4	15	25 3/4	12 1/4	5	3	1 1/16	8 7/16	4 39/89	2 7/32	4 25/64	3/4	48.6
3 1/2	MFPD-56	2-38D	95926	101.6	381.0	654.1	311.2	127.0	76.2	27.0	214.3	112.7	56.4	111.5	3/4	22.04
3 15/16	MFPD-63	3-315D	29905	5	17	12 7/16	14 1/16	6	3 1/2	1 1/4	10 1/4	5 3/8	2 11/16	5 11/64	7/8	83.5
4	MFPD-64	3-4D	133017	127.0	431.8	315.9	357.2	152.4	88.9	31.8	260.4	136.5	68.3	131.4	7/8	37.87
4 7/16	MFPD-71*	3-47D	37482	6	19	14	16	5 1/2	3 1/4	1 5/8	12 1/8	5 3/4	2 7/8	6 11/32	1	130.0
4 15/16	MFPD-79*	3-415D	166720	152.4	482.6	355.6	406.4	139.7	82.6	41.3	308.0	146.1	73.0	161.1	1	58.97
5	MFPD-80	3-500D														

* Units MFPD-71, MFPD-79 and MFPD-80 are not available with contact seal.
For Medium Duty Bearing Inserts-Double Lock see page G-97.

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.