



Precision, Quality, Innovation

BAND SAW BLADES

Bi-Metal

Carbide Tipped

Carbide Grit

Carbon

Portaband

Diamond Grit

Wood Cutting

Food Processing

Power Hacksaws

Accessories

Services

Catalog 60R



PRECISION, QUALITY, INNOVATION

For more than 145 years, manufacturers, builders and craftsmen worldwide have depended upon saws and precision tools from The L.S. Starrett Company to ensure the consistent quality of their manufacturing processes.

They know that the Starrett name on saw blades, hand tools and measuring tools means exceptional quality, innovative products and expert technical assistance.

With strict quality control, state-of-the-art equipment and an ongoing commitment to producing products with superior quality, the 5,000 plus products in today's Starrett line continues to be the most accurate, robust and durable tools available.

This catalog features Starrett Band Saw Blades, their applications and characteristics.

INTRODUCTION

Starrett has been involved in precision tool manufacturing since 1880, sold products worldwide since the 1890s and introduced its first saw blade around 1890.

06

CHOOSING THE RIGHT BLADE

Terminology, Tooth shapes, and Band Saw Blade characteristics

10

BI-METAL SAW BLADES

The best solution for cutting a variety of ferrous and non-ferrous materials. These saws suit all cutting, economic or high production needs for any model of machine.

17

CARBIDE TIPPED

Ideal for cutting extremely hard, abrasive materials. Withstands extreme cutting pressures and offers a high resistance to wear and fatigue.

27



BAND SAW BLADES



CARBIDE GRIT, DIAMOND GRIT

Band saw blades coated with carbide grit or diamond grains are ideal for cutting abrasive materials with precision and excellent finish.

33



CARBON

Suitable for horizontal and vertical machines with manual or gravity feed. A complete line with a wide range of widths, tooth pitches and shapes.

36



WOOD CUTTING

A selection of carbon, bi-metal, and carbide-tipped blades ideal for a variety of wood cutting applications.

41



FOOD PROCESSING

Constructed of the best quality specialty steels, polished and hardened to resist corrosion and contamination. These blades are the ideal choice for accuracy and efficiency at any food processing plant.

47

POWER HACKSAWS

The Bi-Metal or Solid High-Speed Steel (HSS) Power Hacksaw blades are manufactured by Starrett, available in metric and inch.

53



RECOMMENDATIONS

Recommendations to ensure longer life and better blade performance. Break-in and installation instructions.

59



ACCESSORIES

Pocket Laser Tachometer kit with case, Band Saw Blade Tension Gage and Band Saw Blade Alignment Gage.

62



RESOURCES

Find information on the Starrett website and other resources to get the best performance from your band saw blade.

63



BAND SAW BLADES

FACTORIES AROUND THE WORLD



1-Athol, Massachusetts, USA



2-Laguna Hills, California, USA



3-Waite Park, Minnesota, USA



4-Cleveland, Ohio, USA



Factories and Distribution Centers



Starrett Distribution Centers and Offices



5 - Mount Airy, North Carolina, USA



6 - Columbus, Georgia, USA



7 - Itu, São Paulo, Brazil



8 - Jedburgh, Scotland



9 - Suzhou, China



TERMINOLOGY

A-WIDTH

Tip of the cutting edge to the back of the blade.

B-BLADE BODY

Distance between the back of the blade and the gullet.

C-LENGTH

Measurement along the back edge of the blade.

D-THICKNESS

Measurement of the body of the blade.

E-BACK EDGE

Opposite side of the blade from the teeth.

F-TOOTH PITCH

Distance from the tip of one tooth to the next tip.

G-TEETH PER INCH/25MM

Number of teeth (constant pitch) per inch (25.4mm).

H-GULLET

The curved area between two teeth, where the chips accumulate until being removed.

I-TOOTH FACE


Surface of the tooth where the chip is formed. The tooth can have a positive, negative or straight angle. (Rake)


J-TOOTH SET

The side bending of the teeth to allow blade clearance through the cut.

K-BACK ANGLE

Angle formed by the back of the teeth and a parallel line to the tip of the same.

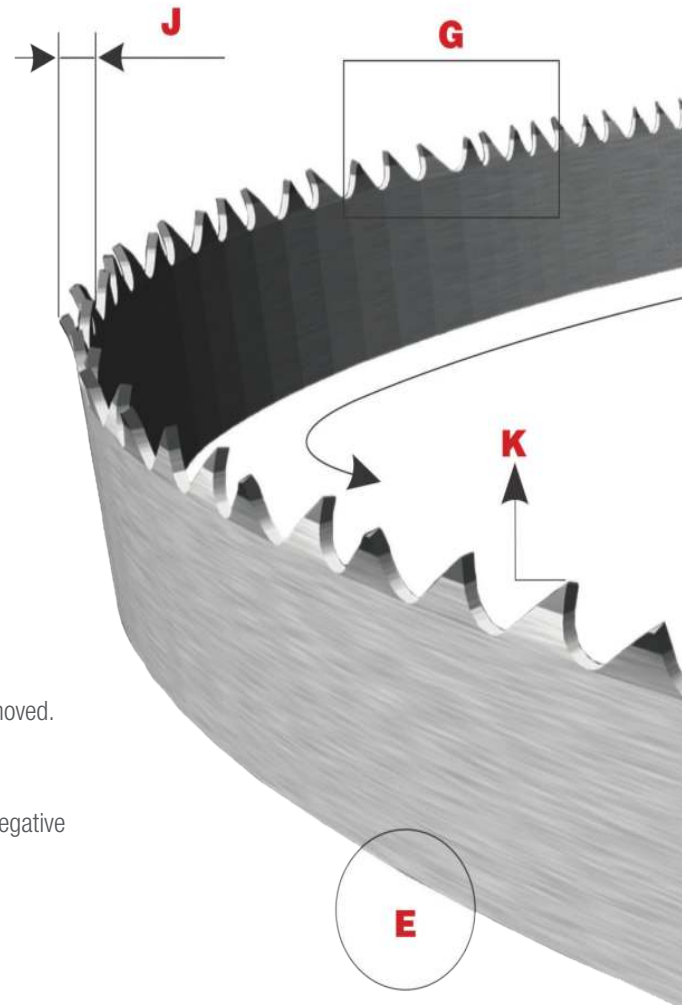

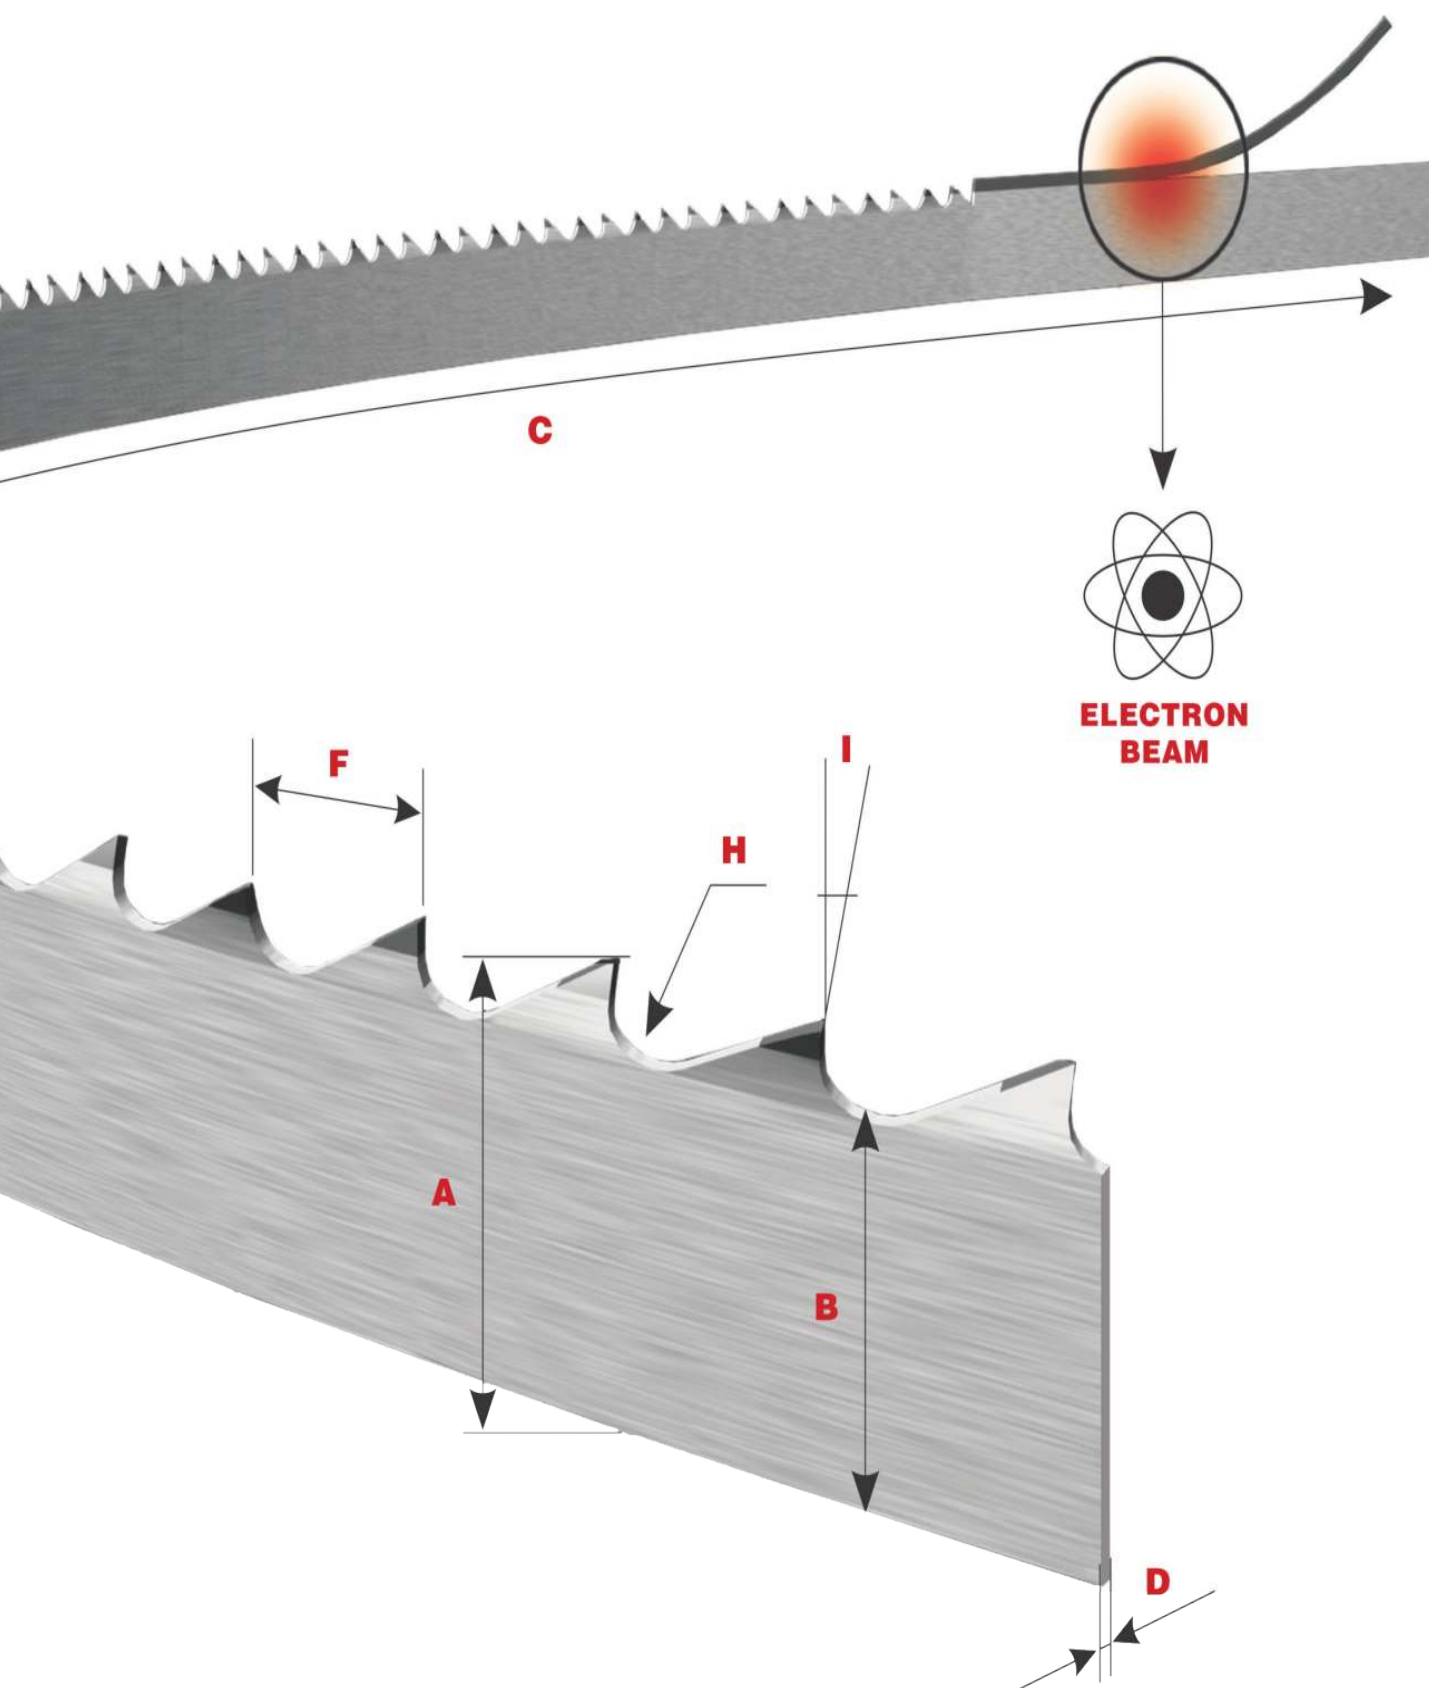

CHOOSING THE RIGHT BLADE

1 QUICK GUIDE




Performance

Ferrous



Aluminum



Tubes and Profiles



Carbon Steel



Carbon Steel Alloys



Cast Iron



Copper Alloys



High-speed steel



Stainless Steel

		Aluminum	Tubes and Profiles	Carbon Steel	Carbon Steel Alloys	Cast Iron	Copper Alloys	High-speed steel	Stainless Steel
Bi-Metal	TENNAX™ - PRO Page 19		☆☆☆						
	Primalloy™ Page 20				☆☆☆	☆☆☆	☆☆☆	☆☆☆	☆☆
	Intenss™ PRO-VTH Page 21				☆☆			☆☆	☆☆☆
	Intenss™ PRO Page 22	☆☆	☆☆	☆☆☆	☆☆☆	☆☆	☆☆	☆☆	☆☆
	Intenss™ PRO-DIE Page 23	☆☆	☆☆	☆☆☆	☆☆☆	☆☆	☆☆	☆☆	☆☆
	Intenss™ Page 24	☆☆	☆☆	☆☆	★	☆☆	★		
	Univerz™ Page 25	★	☆☆	★					
Carbide	Advanz™ MC7 Page 28	☆☆		☆☆☆	☆☆☆	☆☆	☆☆	☆☆☆	☆☆☆
	Advanz™ MC5 Page 29	☆☆☆		☆☆	☆☆	☆☆☆	☆☆☆	☆☆☆	☆☆
	Advanz™ TS Page 30	★		☆☆	☆☆	★	★	★	★
	Advanz™ CS** Page 31								
	Advanz™ FS* Page 32	☆☆☆				☆☆☆	☆☆☆		
	Advanz™ CG Page 34								
Diamond	Advanz™ DG Page 35								
Carbon	Duratec™ SFB Page 38	★	★	★					
	Duratec™ FC Page 39								
	Band Knives Page 40								

*Foundry-Gates and Risers

**Induction or Case Hardened

Ferrous				Non-Ferrous	
 Tool Steel - Hot Work	 Tool Steel - Cold Work	 Nickel and Titanium Alloys	 Steel with Hardness Above 45HRC	 Composite Materials and Abrasives	 Foam, Paper, Plastic and Rubber
***	***	**			
**	**	***			
**	**	*			
**	**	*			
***	***	***	***		
**	**	**	**		
*	*	**	**		

			***	***	

				**	

CHOOSING THE RIGHT BLADE

2 TOOTH SHAPES



Contant
Pitch



Variable
Pitch



.8-1.3 to
14-18



1-1.2 to
4-6



2-3 to
10-14



6 to 32



2-3 to
14-18



2 to 6



3 to 6



1 to 3



.9-1.1 to
3-4



Primalloy™/Intenss™ PRO/Intenss™ PRO-DIE/Univerz™

- Positive Rake angle
- Double back angle
- Fast and efficient chip clearance
- Excellent choice for a wide range of cuts

Intenss™ PRO-VTH

- Variable tooth height providing pulsating action
- Easy penetration
- Ideal for cutting hard and difficult to machine materials

TENNAX™ - PRO

- Increased resistance to wear and tooth breakage
- Positive Rake angle
- Ideal for cutting pipes, tubes and structural profiles

Intenss/Duratec™ SFB/Duratec™ FC/Univerz™

- Neutral angle
- Shock resistant
- Excellent choice for a wide range of cuts
- Suitable for all types of machines

Duratec™ SFB/Intenss™ PRO-DIE

- Positive Rake angle, extremely aggressive
- Faster cuts
- Suitable for cutting ferrous and non-ferrous metals

Duratec™ SFB

- Neutral angle
- Shock resistant
- Suitable for cutting ferrous and non-ferrous metals

Advanz™ MC7/Advanz™ MC5/Advanz™ TS/Advanz™ CS/Advanz™ FS

- Differential tooth design, accurately ground
- Triple chip tooth geometry
- Faster cuts
- Ideal for cutting hard and difficult to machine materials

Advanz™ CG/Advanz™ DG

- Cutting edge coated with grains, continuous or with gullet
- Suitable for cutting abrasive or hardened materials

CHOOSING THE RIGHT BLADE

TOOTH



Constant Pitch

All teeth on the blade have uniform spacing, gullet depth and rake angle throughout the full length. Typically for general purpose cutting. Identified by one pitch number.



Variable Pitch


Size of tooth and depth of gullet varies to substantially reduce noise levels and vibrations. Cuts all structurals, tubing and solids smoothly and quickly. Identified by two pitch numbers.

SETS




Raker

A recurring sequence of teeth set left and right, followed by one tooth unset. Frequency of unset teeth on variable pitch blades varies depends on the tooth configurations.




Alternate

A recurring sequence of teeth set alternately left and right.



Wavy

Groups of teeth set to each side of the blade, with varying amounts of set in a controlled pattern.




Trapezoid

Special carbide cylinder, welded to an alloy backer, then precision ground with a high/low tooth form.

CHOOSING THE RIGHT BLADE

3 BLADE WIDTH

Use the blade width recommended by the machine manufacturer, except for contour cutting in vertical machines when you should use the chart below.

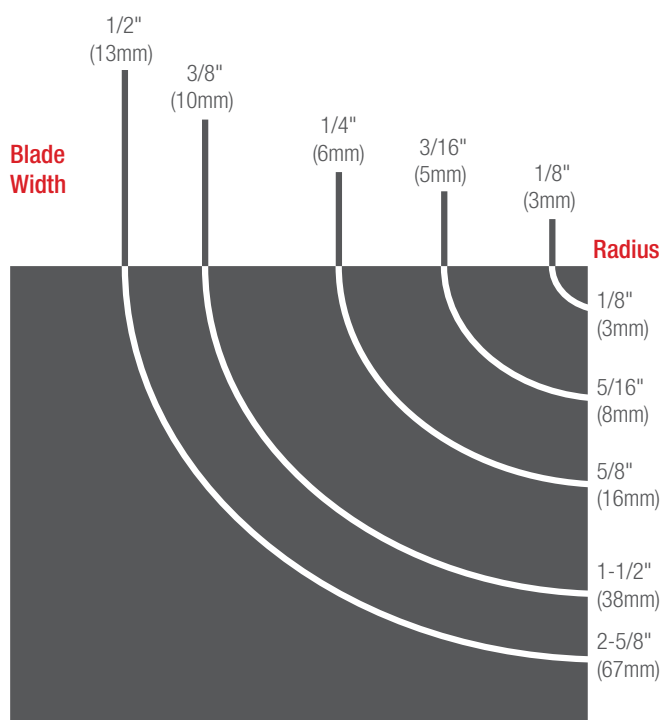

4 PITCH

Pitch is the number of teeth per inch/25mm. Cutting thinner sections requires a finer pitch (more teeth per inch/25mm). Thick sections require coarser pitches (fewer teeth per inch/25mm).

The charts are good guidelines. Because the cross section limits in the chart are broad and overlap, choose a coarser pitch if the speed of cut is most important.

Section to be Cut (in)	Constant Pitch (TPI)	Variable Pitch
5/32" to 3/8"	32 or 24	14-18
1/4" to 1/2"	18 or 14	10-14
1/2" to 3/4"	14 or 10	8-12
3/4" to 1"	10 or 8	6-10
1" to 1-1/2"	8 or 6	5-8
1-1/2" to 3-1/2"	6 or 4	4-6
3-1/2" to 7"	4 or 3	3-4
7" to 10"	3	2-3
10" to 16"	—	1/4-2
14" to 20"	1/3	1-2
16" to 32"	1/3	1-1/2
Over 30"	1	.8-1/3/.9-1/1

- For cutting tubes and profiles, use the horizontal line to find the outside diameter (tube) or the largest section (profile). Find the thickness (tube/profile) using the vertical column. With that information, cross them to find the recommended pitch (chart below).

Tubes and Profiles

Wall Thickness in	Outside diameter of tube or maximum profile section length (in)												
	3/8"	3/4"	1-5/8"	2-3/8"	3-1/4"	4"	4-3/4"	6"	8"	12"	16"	20"	24"
3/32"	14-18	14-18	10-14	10-14	10-14	10-14	8-12	8-12	8-12	8-12	6-10	6-10	5-8
1/8"	10-14	10-14	10-14	10-14	10-14	8-12	8-12	8-12	6-10	6-10	6-10	5-8	5-8
5/32"		8-12	8-12	8-12	8-12	6-10	6-10	6-10	5-8	5-8	4-6	4-6	4-6
3/16"		6-10	6-10	6-10	6-10	5-8	5-8	5-8	5-8	4-6	4-6	4-6	4-6
1/4"		5-8	5-8	5-8	5-8	5-8	5-8	5-8	4-6	4-6	4-6	4-6	3-4
5/16"			4-6	4-6	4-6	4-6	4-6	4-6	4-6	4-6	3-4	3-4	3-4
3/8"			4-6	4-6	3-4	3-4	3-4	3-4	3-4	3-4	3-4	2-3	2-3
1/2"				4-6	3-4	3-4	3-4	3-4	3-4	3-4	2-3	2-3	2-3
5/8"				4-6	3-4	3-4	3-4	3-4	3-4	2-3	2-3	2-3	2-3
3/4"				4-6	3-4	3-4	3-4	3-4	3-4	2-3	2-3	2-3	2-3
1"					3-4	3-4	3-4	3-4	2-3	2-3	2-3	1/4-2	1/4-2
1-1/4"					3-4	3-4	3-4	3-4	2-3	2-3	2-3	1/4-2	1/4-2
1-5/8"						3-4	3-4	3-4	2-3	2-3	2-3	1/4-2	1/4-2
2"							3-4	3-4	2-3	2-3	1/4-2	1/4-2	1-1/2
2-3/8"									2-3	2-3	1/4-2	1/4-2	1-1/2

5 BLADE LENGTH

The blade length varies according to the band saw machine type and specifications. Please find the correct blade length in your band saw machine user manual.



ON-SITE TECHNICAL SUPPORT

Starrett Saw Specialists are available to tune up and perform preventative maintenance on your production sawing machine using Starrett Band Saw Blades, at no additional cost. They fully review machine condition, blade mounting and operation in detail, making adjustments, as required, to help maintain good sawing and long life for both the machine and blades.

GUARANTEED BLADE SATISFACTION TRIAL PROGRAM

As a part of our Test & Trial Blade Program, Starrett Saw Specialists conduct on-site saw tests to observe your current blade performance and specific saw application. Our band saw testing process drives a data-driven approach to optimize performance and lower your cost per cut.



TRAINING

Starrett Saw Specialists can also instruct saw operators on achieving the best performance of blade and machine for your applications. Contact Starrett directly or your nearest Starrett distributor about arranging a visit to your workplace by a Starrett Saw Specialist.

The L.S. Starrett Company
121 Crescent Street
Athol, MA 01331-1915 - U.S.A
Tel: (978) 249-3551
www.starrett.com | sales@starrett.com



CONTACT US

HOW TO ORDER

Contact Starrett directly or your nearest Starrett distributor for prompt service, delivery and technical support.

GUARANTEED BLADE SATISFACTION TRIAL PROGRAM

To inquire about our Test & Trial Blade Program, call the Starrett Sales Team at 978-249-3551 or email us at sales@starrett.com



PRODUCT DEMONSTRATION

All Starrett manufacturing and branch locations and many distributors can demonstrate an array of Starrett products at work. Contact your Starrett distributor to learn more.

Starrett®
(978) 249-3551 • starrett.com

Follow us!






BI-METAL BAND SAW BLADES

BI-METAL TENNAX™-PRO

NEW
PRODUCT

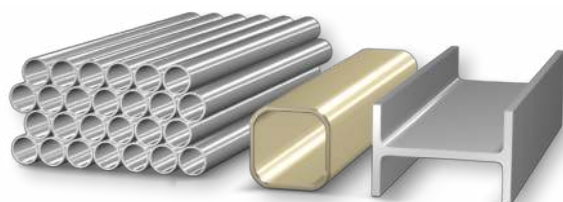

The new bi-metal **TENNAX-PRO Band Saw Blades** by Starrett deliver next generation cutting performance on pipes, tubes, and structural profiles. TENNAX-PRO blades outperform competitive blades with lower noise, heat and vibration, and up to 25% more cuts per blade.

TENNAX-PRO Band Saw Blades replace Starrett Versatix MP. For cross reference support, please visit starrett.com

FEATURES

- New tooth geometry developed for cutting pipes and structural material profiles
- M42 High Speed Edge
- Exclusive tooth setting process

BENEFITS

- High level of productivity in extreme cutting processes used for pipes, profiles and structural materials
- Increased resistance to wear and tooth breakage
- Low noise, low vibration and improved cutting performance

APPLICATIONS

- Pipes, tubes, and structurals
- Small solids
- Bundles
- For all machines: manual, hydraulic, gravity fed, etc.

Width x Thickness in	mm	Pitch/Rake	Material No.
3/4 x .035	19 x 0.90	4-6/TX-P-H	99567
		5-8/TX-P-H	99568
		6-10/TX-P-H	99569
		8-12/TX-P-H	99570
		10-14/TX-P-H	99571
1 x .035	27 x 0.90	3-4/TX-P-H	99572
		4-6/TX-P-H	99573
		5-8/TX-P-H	99574
		6-10/TX-P-H	99575
		8-12/TX-P-H	99576
1-1/4 x .042	34 x 1.10	10-14/TX-P-H	99577
		2-3/TX-P-H	99578
		3-4/TX-P-H	99579
		4-6/TX-P-H	99580
		5-8/TX-P-H	99581
1-1/2 x .050	41 x 1.30	6-10/TX-P-H	99582
		2-3/TX-P-H	99583
		3-4/TX-P-H	99584
		4-6/TX-P-H	99585
		5-8/TX-P-H	99586
2 x .063	54 x 1.60	2-3/TX-P-H	99587
		3-4/TX-P-H	99588
		4-6/TX-P-H	99589
2-5/8 x .063	67 x 1.60	2-3/TX-P-H	99590
		3-4/TX-P-H	99591

TX - TENNAX-PRO tooth profile | P - Positive rake | H - Heavy set

3/4" to 1-1/4" sizes available in 150' (45m) and 250' (75m) coils. 1-1/2" and 2" sizes available in 150' (45m) coils.

2-5/8" size available only in welded blades.

All coils supplied within plus or minus 10% of ordered size.

Furnished in welded bands for all widths, or in random coils for 3/4" to 2" widths. Special products on request.

BI-METAL

PRIMALLOY™



FEATURES

- Special high-speed steel edge
- Exclusive tooth geometry with positive rake angle
- Extended Life Treatment (EXT)-ensures maximum fatigue life
- Ground teeth


BENEFITS

High content of Cobalt and Vanadium guarantee:

- High production, longer operating blade life with high quality surface finishing
- Increased wear and heat resistance
- Easy penetration in hard and difficult to machine materials, increasing the blade performance
- Cost-effective over conventional bi-metal blades

APPLICATIONS

- Tool steel and high-speed steel
- Stainless steels
- Nickel and titanium alloys
- Hardened steel
- For machines with hydraulic feed control

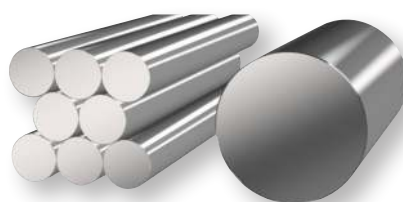

Width x Thickness		Pitch/Rake	Material No.
in	mm		
1-1/4 x .042	34 x 1.10	2-3/IP-P-R	99801
		1.4-2/IP-P-R	99803
1-1/2 x .050	41 x 1.30	2-3/IP-P-R	99804
		3-4/IP-P-R	99805
2 x .063	54 x 1.60	2-3/IP-P-R	99807
		3-4/IP-P-R	99808
2-5/8 x .063	67 x 1.60	1-1.2/IP-P-R	99809

IP - Intens™ tooth profile | P - Positive rake | R - raker set

1" to 1-1/4" sizes available in 150' (45m) and 250' (75m) coils. 1-1/2" and 2" sizes available in 150' (45m) coils. 2-5/8" sizes available only in welded blades.

All coils supplied within plus or minus 10% of ordered size.

Furnished in welded bands for all widths, or in random coils for 1" to 2" widths.

Special products on request.



EXTENDED LIFE TREATMENT (EXT)

The Starrett Primalloy Band Saw product line applies a proprietary Extended Life Treatment (EXT) to its alloy steel backing material. This process, in addition to controlled blast peening, enhances the fatigue life of the blade. The EXT applied during the peening operation adds increased residual stress into the surface of the blade. Higher stress levels aid in the reduction of fatigue cracks that originate along microscopic grain boundaries. The benefits of extended life treatment are proven with X-Ray Diffraction (XRD) and extensive mechanical fatigue tests. This process will soon be applied to most Starrett bi-metal and carbide tip product lines.

BI-METAL

INTENSTM PRO-VTH

Starrett[®] IntensTM PRO-VTH

FEATURES

- Uniquely designed tooth edge with variable height and set
- Positive rake, ground teeth

BENEFITS

- Easy penetration for faster cuts
- Excellent heat and wear resistance
- Pulsating action allow the teeth to penetrate, resulting in faster cuts

APPLICATIONS

- Tool steel and high-speed steel
- Stainless steels
- Aluminum bronze alloys
- For machines with hydraulic feed control
- Ideal for cutting all steels and non-ferrous metals up to 40 HRC



Width x Thickness		Pitch/Rake	Material No.
in	mm		
1 x .035	27 x 0.90	3-4/IP-P-R	99949*
		4-6/IP-P-R	99950*
1-1/4 x .042	34 x 1.10	3-4/IP-P-R	99954
2 x .063	54 x 1.60	1.4-2/IP-P-R	99967
3-1/8 x .063	80 x 1.60	1-1.2/IP-P-R	99993

IP - IntensTM tooth profile | P - Positive rake | R - raker set


*bi-metal unique[®] Technology

3/4" to 1-1/4" sizes available in 150' (45m) and 250' (75m) coils. 1-1/2" and 2" sizes available in 150' (45m) coils. 2-5/8" and 3-1/8" sizes available only in welded blades.

All coils supplied within plus or minus 10% of ordered size.

Furnished in welded bands for all widths, or in random coils for 3/4" to 2" widths.

Special products on request.

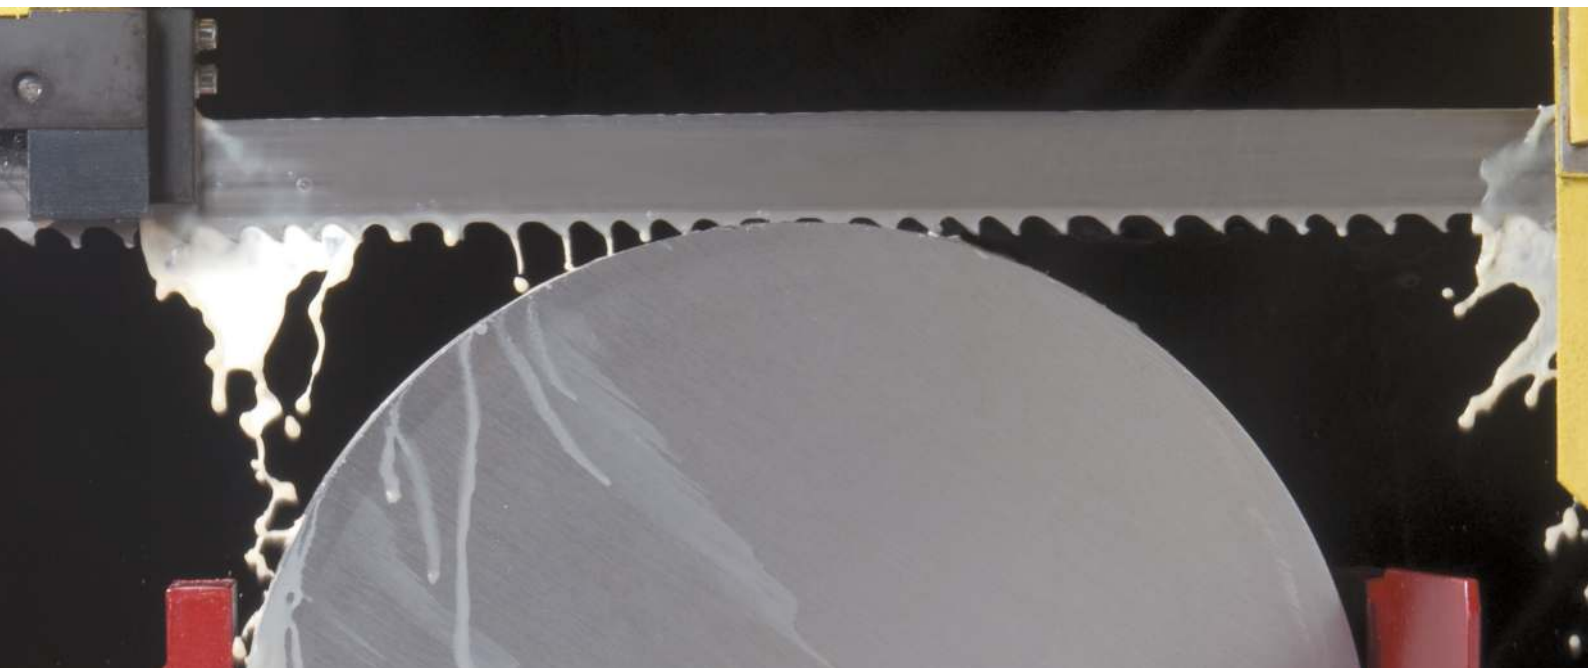

BI-METAL

INTENSTM PRO



FEATURES


- Complete line with a full range of widths and pitches to suit a variety of cutting needs
- Unique tooth geometry provides intense production cutting in ferrous and non-ferrous metals

BENEFITS

- Faster and straighter cuts
- Improved fatigue and wear resistance

APPLICATIONS

- Ideal for production cutting across a wide range of metals
- For solids and thick wall tubes

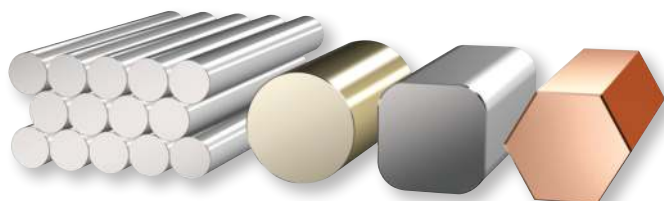

Width x Thickness		Pitch/Rake	Material No.
in	mm		
3/4 x .035	19 x 0.90	3-4/IP-P-R	99191
		4-6/IP-P-R	99902
		5-8/IP-P-R	99903
		6-10/IP-P-R	99206
1 x .035	27 x 0.90	2-3/IP-P-R	99905
		3-4/IP-P-R	99906
		4-6/IP-P-R	99907
		5-8/IP-P-R	99908
1-1/4 x .042	34 x 1.10	6-10/IP-P-R	99318
		2-3/IP-P-R	99912
		3-4/IP-P-R	99913
		4-6/IP-P-R	99914
1-1/2 x .050	41 x 1.30	5-8/IP-P-R	99915
		6-10/IP-P-R	99500
		1-1.2/IP-P-R	99917
		2-3/IP-P-R	99923
2 x .063	54 x 1.60	3-4/IP-P-R	99924
		4-6/IP-P-R	99926
		5-8/IP-P-R	99927
		.8-1.3/IP-P-R	99928
2-5/8 x .063	67 x 1.60	1.4-2/IP-P-R	99931
		2-3/IP-P-R	99932
		3-4/IP-P-R	99933
		4-6/IP-P-R	99962
3-1/8 x .063	80 x 1.60	.8-1.3/IP-P-R	99934
		1-1.2/IP-P-R	99937
		1.4-2/IP-P-R	99941
		2-3/IP-P-R	99965
3-1/8 x .063	80 x 1.60	3-4/IP-P-R	99938
		.8-1.3/IP-P-R	99942
		1-1.2/IP-P-R	99943
3-1/8 x .063	80 x 1.60	1.4-2/IP-P-R	99947

IP - IntensTM tooth profile I P - Positive rake I R - Raker set

3/4" to 1-1/4" sizes available in 150' (45m) and 250' (75m) coils. 1-1/2" and 2" sizes available in 150' (45m) coils. 2-5/8" and 3-1/8" sizes available only in welded blades.

All coils supplied within plus or minus 10% of ordered size.

Furnished in welded bands for all widths, or in random coils for 3/4" to 2" widths.

Special products on request.

BI-METAL

INTENSS™ PRO-DIE



FEATURES

- Split Chip Advantage Technology
- Multiple cutting edges-Multi Edge Performance

BENEFITS

- Technology that allows faster cutting rates for longer blade life
- Cost-effective over conventional carbon steel blades
- Excellent fatigue, abrasion and shock resistance

APPLICATIONS

- Ideal for contour cutting on vertical machines
- Carbon steel and low alloy steels
- Sheet metal
- Die and Mold steel
- Stainless steel

Width x Thickness		Pitch/Rake	Material No.
in	mm		
1/4 x .025	6 x 0.65	10-14/IP-P-R	99079*
		14-18/RG-S-W	99080*
1/4 x .035	6 x 0.90	10-14/IP-P-R	99078*
		8-12/IP-P-R	99122*
3/8 x .025	10 x 0.65	10-14/IP-P-R	99124*
		14-18/RG-S-W	99125*
3/8 x .035	10 x 0.90	6/HH-P-R	99093*
		14-18/RG-S-R	99190*
1/2 x .020	13 x 0.50	4/HH-P-R	99143*
		6/HH-P-R	99151*
1/2 x .025	13 x 0.65	6-10/IP-P-R	99102*
		8-12/IP-P-R	99165*
1/2 x .035	13 x 0.90	10-14/IP-P-R	99186*
		14-18/RG-S-W	99188*
1/2 x .035	13 x 0.90	4/HH-P-R	99144*
		6/HH-P-R	99152*
1/2 x .035	13 x 0.90	6-10/IP-P-R	99154*
		8-12/IP-P-R	99167*
1/2 x .035	13 x 0.90	10-14/IP-P-R	99178*


RG - Regular tooth profile | S - Straight (Zero) rake | R - Raker set | W - Wavy set
IP - Intenss™ tooth profile | HH - Hook high tooth profile | P Positive rake

*bi-metal unique® Technology

All sizes available in 100' (30m) and 250' (75m) coils or welded bands.

All coils supplied within plus or minus 10% of ordered size.

Special products on request.


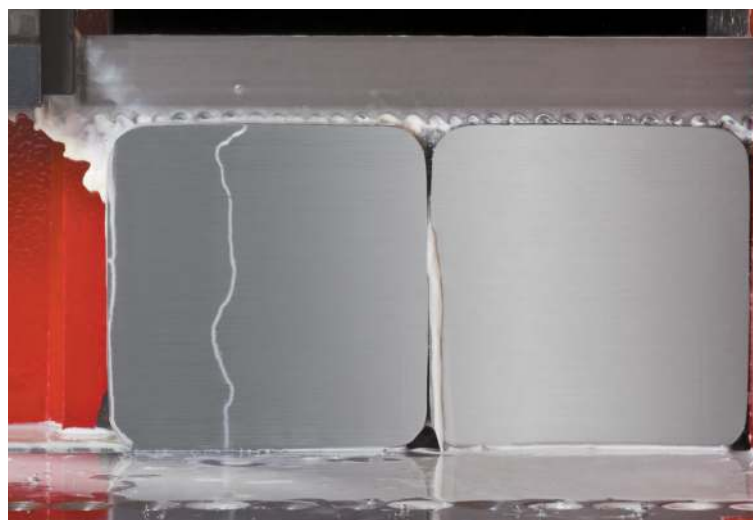


1. Patented process providing 170% more weld contact for superior teeth stripping resistance

2. Significantly reduced fracture and breakage

3. Multi-edge cutting performance resulting in faster cuts and longer blade life

**bi-metal
unique®**



BI-METAL

INTENSSM

bi-metal unique[®]



FEATURES

- Strong tooth geometry
- M42 high-speed steel teeth combined with a fatigue resistant backing

BENEFITS

- Ideal for horizontal machines and light duty verticals
- Ideal for toolrooms and maintenance shops

APPLICATIONS

- Sheets, carbon steel solids and structurals, aluminum, copper, brass, cast iron, alloy steel, stainless steel etc.
- Small and medium solid dimensions



Width x Thickness		Pitch/Rake	Material No.
in	mm		
1/2 x .025	13 x 0.65	14/RG-S-R	99192*
		18/RG-S-W	99185*
1/2 x .035	13 x 0.90	10/RG-S-R	99176*
		14/RG-S-R	99181*
		4-6/RG-S-R	99195
		5-8/RG-S-R	99198
		6-10/RG-S-R	99197
3/4 x .035	19 x 0.90	8-12/RG-S-R	99199
		10/RG-S-R	99231
		10-14/RG-S-R	99193
		14/RG-S-R	99238
		3-4/RG-S-R	99282
		4-6/RG-S-R	99307
		5-8/RG-S-R	99297
		6-10/RG-S-R	99303
1 x .035	27 x 0.90	8-12/RG-S-R	99304
		10/RG-S-R	99331
		10-14/RG-S-R	99302
		14/RG-S-R	99109
		2-3/RG-S-R	99411
		3-4/RG-S-R	99423
		4-6/RG-S-R	99430
1-1/4 x .042	34 x 1.10	5-8/RG-S-R	99434
		6-10/RG-S-R	99424
		8-12/RG-S-R	99425


RG - Regular tooth profile | S - Straight (Zero) rake | R - Raker set | W - Wavy set

*bi-metal unique[®] Technology

1/2" sizes available in 100' (30m) and 250' (75m) coils. 3/4" to 1-1/4" sizes available in 150' (45m) and 250' (75m) coils. 1-1/2" sizes available in 150' (45m) coils.

All coils supplied within plus or minus 10% of ordered size.
Furnished in welded bands or in random coils for all widths.

Special products on request.

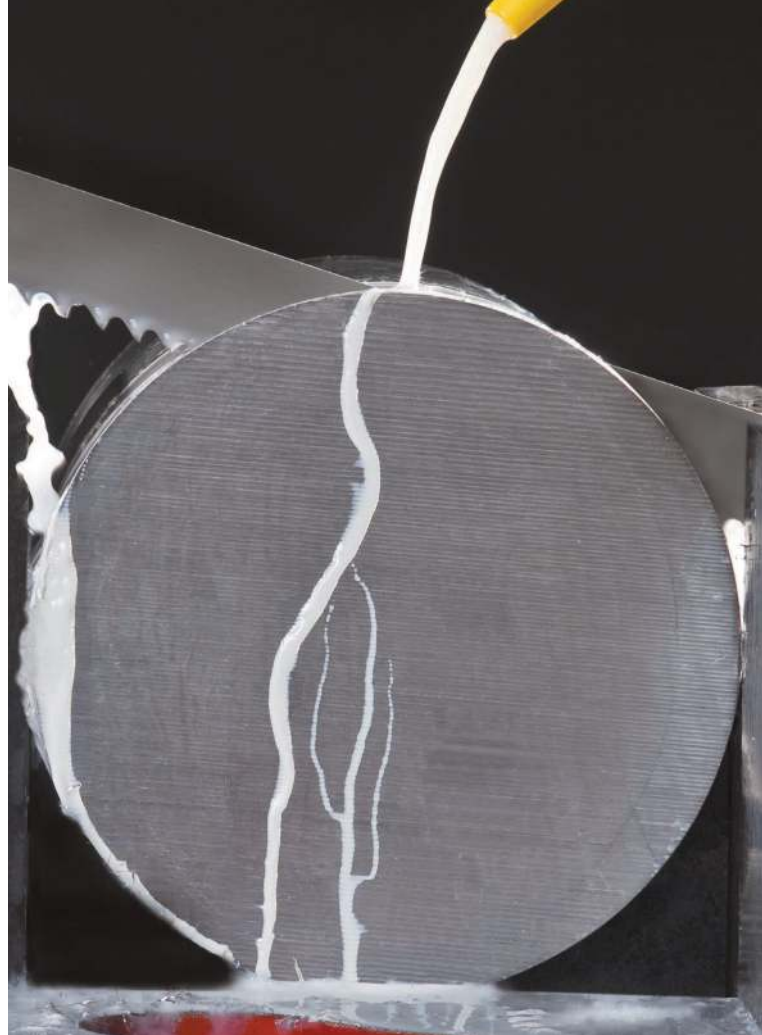



FEATURES

- Split Chip Advantage Technology
- Multiple cutting edges-Multiple Edge Performance
- Blade thickness: 0.020"

BENEFITS

- Technology that allows faster cutting rates and increased blade life
- More cost-effective than conventional carbon steel blades
- Excellent fatigue, abrasion and shock resistance
- For contour cuts

APPLICATIONS

- Portable machines
- Vertical machines with reduced wheel diameter
- Ideal for metal workshops, construction and hobbyists
- Steel, iron, aluminum



Width x Thickness		Pitch/Rake	Material No.
in	mm		
1/2 x .020	13 x 0.50	10/RG-S-R	99171*
		14/RG-S-R	99179*
		18/RG-S-W	99182*
		24/RG-S-W	99184*
		10-14/RG-S-R	99187*
		14-18/RG-S-W	99180*

RG - Regular tooth profile | S - Straight (Zero) rake | R - Raker set | W - Wavy set
*bi-metal unique® Technology
Available in 100' (30m) and 250' (75m) coils.
All coils supplied within plus or minus 10% of ordered size.
Furnished in welded bands.
Special products on request.



PORTABAND

bi-metal
unique®

Starrett® Univerz™

FEATURES


- Split Chip Advantage Technology
- Multiple cutting edges-Multiple Edge Performance
- Blade thickness: 0.020"

BENEFITS

- Technology that allows faster cutting rates and increased blade life
- More cost-effective than conventional carbon steel blades
- Excellent fatigue, abrasion and shock resistance
- For contour cuts

APPLICATIONS

- Ideal for metal workshops, construction and hobbyists
- Steel, iron, aluminum

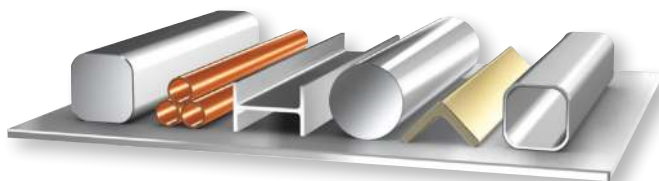


Cat. No.	EDP	Length in	cm	Width x Thickness in mm		Pitch/Rake
Univerz™ - 3 Bands per Sleeve						
BM10	14600	44-7/8	114	1/2 x .020	13 x 0.50	10/RG-S-R
BM14	14601					14/RG-S-R
BM18	14602					18/RG-S-W
BM24	14603					24/RG-S-W
BM1014	15708					10-14/RG-S-R
BM1418	16088	14-18/RG-S-W				
Univerz™ - 100 per Box						
BM10B	16948	44-7/8	114	1/2 x .020	13 x 0.50	10/RG-S-R
BM14B	16949					14/RG-S-R
BM18B	16950					18/RG-S-W
BM24B	16951					24/RG-S-W
BM1014B	16952					10-14/RG-S-R
BM1418B	16953	14-18/RG-S-W				
Advanz™ CG - Carbide Grit - 1 per Box						
CG4CM	19954	44-7/8	114	1/2 x .020	13 x 0.50	Continuous

RG - Regular tooth profile | S - Straight (Zero) rake | R - Raker set | W - Wavy set

*All products feature bi-metal unique® Technology



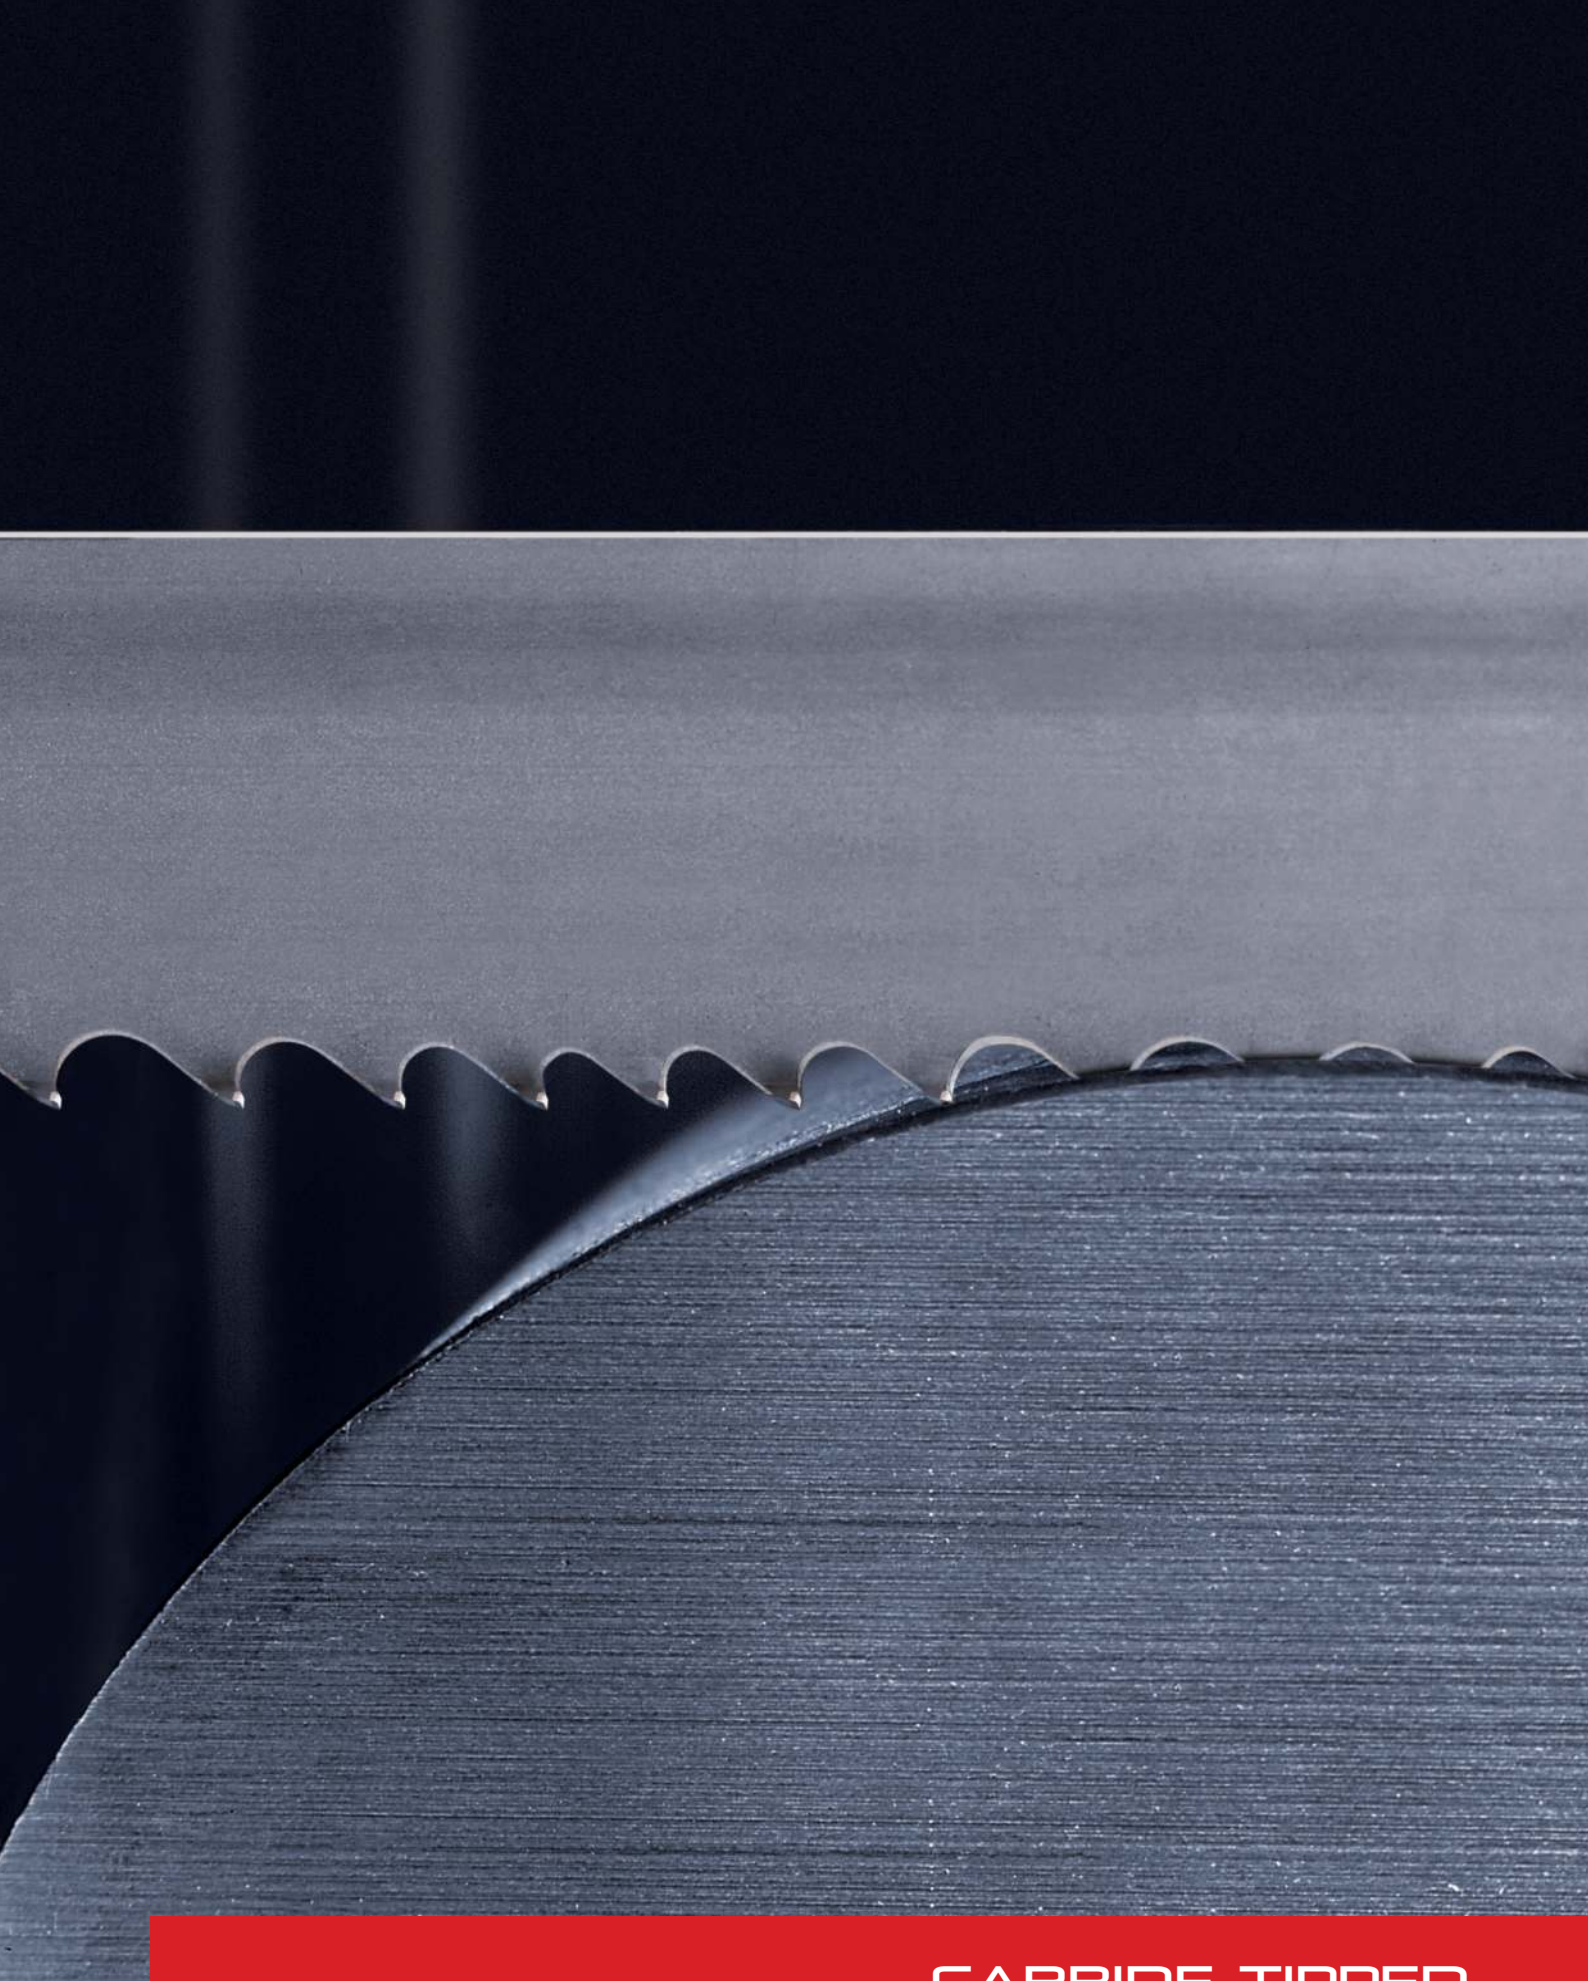

CARBIDE TIPPED

CARBIDE

ADVANZ™ MC7



AVAILABLE WITH
AMP
 TECHNOLOGY

FEATURES


- Exclusive Starrett tooth geometry
- Carbide tipped
- Progressively ground trapezoidal tooth design
- Utilizes a progressive four tooth grind creating seven distinct chips
- Positive rake angle
- Submicron carbide (HV1600)

BENEFITS

- Cutting ferrous metals
- Higher productivity through reduced cutting time
- Precision cuts - superb surface finish
- Excellent "cost per cut" for production cutting
- Exclusive Starrett edge preparation - minimizes micro chipping
- Less wear compared to conventional triple chip


APPLICATIONS

- Difficult to machine steels
- Tool steels, heat-treated steels, stainless materials
- Inconel, nickel alloys
- Titanium


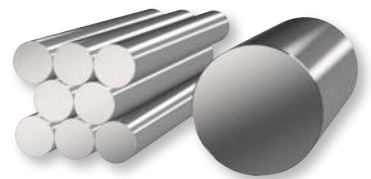


Width x Thickness		Pitch/Rake	Material No.
1-1/4 x .042	34 x 1.10	2-3/SC-P-T	92573
1-1/2 x .050	41 x 1.30	1.4-2/SC-P-T	92575
		2-3/SC-P-T	92581
2 x .063	54 x 1.60	1.4-2/SC-P-T	92578
		2-3/SC-P-T	92582
2-5/8 x .063	67 x 1.60	.9-1.1/SC-P-T	92583
		1.4-2/SC-P-T	92584
3-1/8 X 0.63	80 X 1.60	.9-1.1/SC-P-T	92594
		1.4-2/SC-P-T	92595

P - Positive rake | SC - Septuple chip | T - Trapezoid set
 Furnished in welded bands.
 Special products on request.

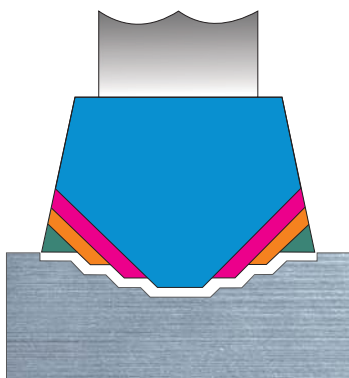

MC7 (Seven Multiple Chips)

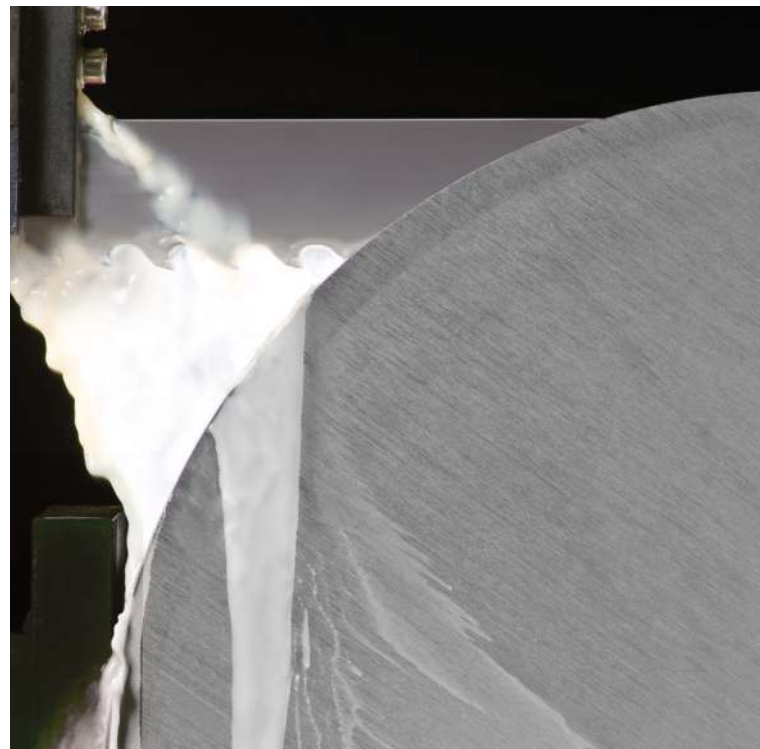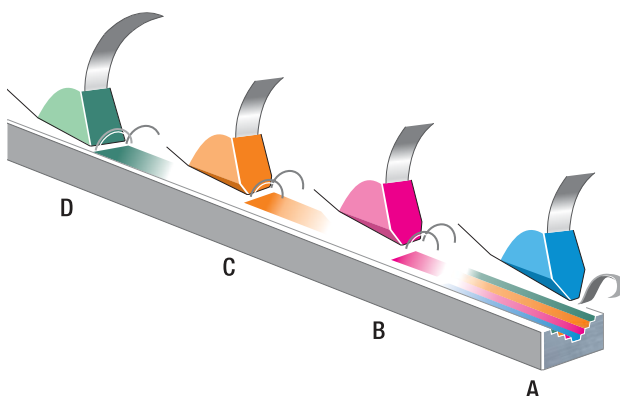

CARBIDE

ADVANZ™ MC5



AVAILABLE WITH
AMP
TECHNOLOGY

FEATURES


- Exclusive Starrett tooth geometry
- Carbide tipped
- Ground tooth produces 5 chips
- Utilizes a multiple chip grind with a high/low tooth sequence
- Positive rake angle
- Submicron carbide (HV1600)

BENEFITS

- Higher productivity through reduced cutting time
- Precision cuts - superb surface finish
- Excellent "cost per cut" for production cutting
- Starrett exclusive edge preparation - minimizes micro chipping
- Chip load is spread out over more teeth to facilitate longer life

APPLICATIONS

- Automotive aluminum casting blocks
- Alloy tool steels
- Aerospace alloys
- Stainless steel
- Nickel alloys
- Cast iron

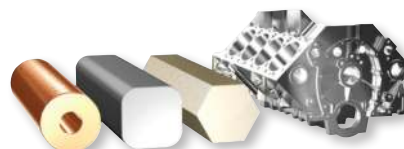


Width x Thickness in	mm	Pitch/Rake	Material No.
1-1/4 x .042	34 x 1.10	2-3/QC-P-T	92572
1-1/2 x .050	41 x 1.30	1.4-2/QC-P-T	92574
		2-3/QC-P-T	92586
2 x .063	54 x 1.60	1.4-2/QC-P-T	92577
		2-3/QC-P-T	92580
2-5/8 x .063	67 x 1.60	.9-1.1/ QC-P-T	92533
		1.4-2/QC-P-T	92598
3-1/8 x .063	80 x 1.60	.9-1.1/QC-P-T	92545
		1.4-2/QC-P-T	92585


P - Positive rake | QC - Quintuple chip | T - Trapezoid set

Furnished in welded bands.

Special products on request.

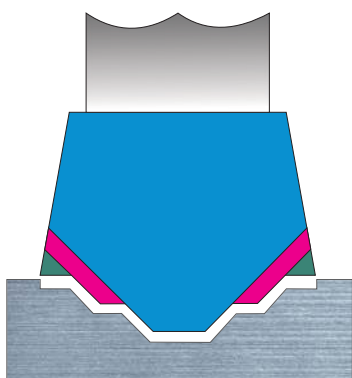

MC5 (Five Multiple Chips)

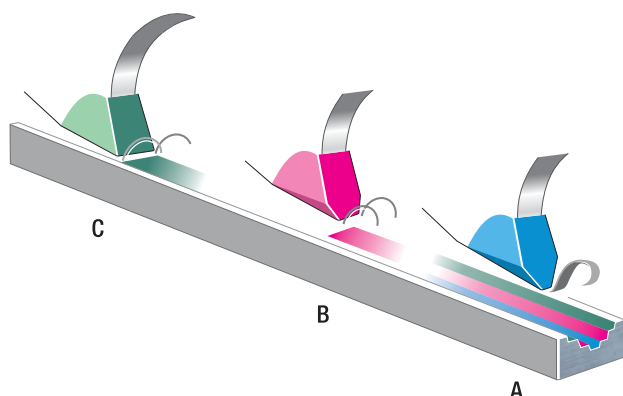

**NOW AVAILABLE WITH
NEW AMP TECHNOLOGY!**



The new AMP technology available on Starrett band saw blades increases cutting efficiency and blade life. A custom back edge enhancement on the blade generates a rocking motion while cutting which results in an increase in tooth penetration without added feed pressure. This cutting motion also serves to minimize surface contact area, increasing the blade life on hard to cut alloys.

CARBIDE

ADVANZ™ TS

Starrett® Advanz™ TS

FEATURES


- Carbide tipped teeth
- Triple chip tooth geometry
- Aggressive Rake angle

BENEFITS

- General purpose cutting
- Ferrous and non-ferrous metals
- Reduced cutting time - Higher productivity
- Precise cuts producing excellent finish
- Excellent "cost per cut" for production cutting
- Good for less rigid saw machines

APPLICATIONS

- High-alloy metals
- Aerospace alloys
- Stainless steel
- Nickel alloys
- Hard and abrasive materials
- For machines with hydraulic feed control
- Cast iron
- Brass, bronze, copper

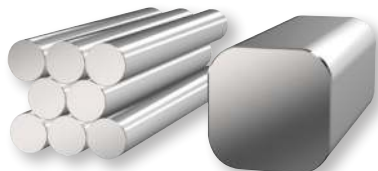

Width x Thickness		Pitch/Rake	Material No.
in	mm		
1/2 x .035	13 x 0.90	3/TC-P-T	92593
		3/TC-P-T	92500
3/4 x .035	19 x 0.90	3-4/TC-P-T	92503
3/4 x .050	19 x 1.30	3/TC-P-T	92571
1 x .035	27 x 0.90	3/TC-P-T	92504
		3-4/TC-P-T	92509
1-1/4 x .042	34 x 1.10	2-3/TC-P-T	92515
		3-4/TC-P-T	92517
		1.4-2/TC-P-T	92521
1-1/2 x .050	41 x 1.30	2-3/TC-P-T	92516
		3-4/TC-P-T	92569

P - Positive rake | TC - Triple chip | T - Trapezoid set

Furnished in welded bands.

Special products on request.

Width x Thickness		Pitch/Rake	Material No.
in	mm		
2 x .063	54 x 1.60	1.4-2/TC-P-T	92559
		2-3/TC-P-T	92528
2-5/8 x .063	67 x 1.60	.9-1.1/TC-P-T	92560
		1.4-2/TC-P-T	92561
3-1/8 x .063	80 x 1.60	1.4-2/TC-P-T	92563

P - Positive rake | TC - Triple chip | T - Trapezoid set

Furnished in welded bands.

Special products on request.

CARBIDE

ADVANZ™ CS

Starrett® Advanz™ CS

FEATURES


- Carbide tipped teeth
- Triple chip tooth geometry
- Negative Rake angle

BENEFITS

- Ideal for cutting hardened materials
- High resistance to abrasion
- Reduced cutting time - Higher productivity
- Precise cuts produces excellent finish

APPLICATIONS

- Case hardened steel
- Steel for shafts and linear guides
- Case hardened materials up to 60 HRC




Width x Thickness		Pitch/Rake	Material No.
in	mm		
1 x .035	27 x 0.90	3-4/TC-N-T	92564
1-1/4 x .042	34 x 1.10	3-4/TC-N-T	92565
1-1/2 x .050	41 x 1.30	2-3/TC-N-T	92576
		3-4/TC-N-T	92570
2 x .063	54 x 1.60	2-3/TC-N-T	92592

N - Negative rake | TC - Triple chip | T - Trapezoid set

Furnished in welded bands.

Special products on request.

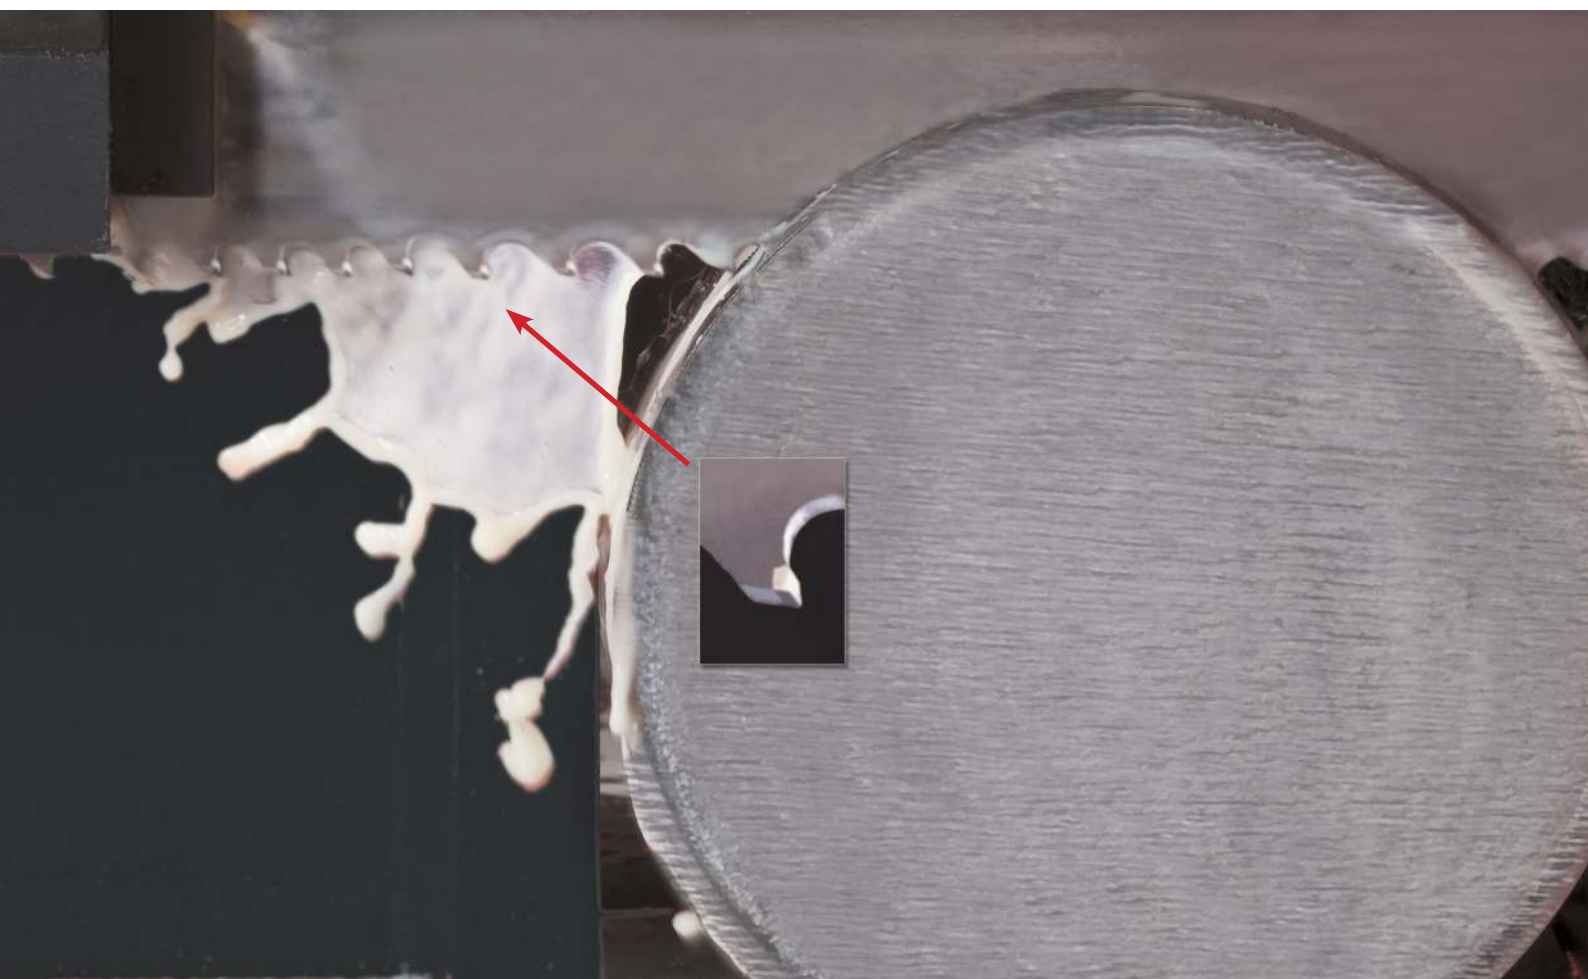

CARBIDE

ADVANZ™ FS

Starrett® Advanz™ FS

FEATURES


- Carbide tipped teeth
- Triple chip tooth geometry
- Positive Rake angle

BENEFITS

- Ideal for cutting abrasive materials
- Exceptional resistance to fatigue, abrasion and shocks
- Reduced cutting time-Higher productivity
- Precise cuts and excellent finishing

APPLICATIONS

- Abrasive non-ferrous metals
- Aluminum
- Cast materials and risers
- Composite materials
- Fiberglass
- Graphite
- Abrasive and hardwoods such as Tauari and others
- Robust vertical and horizontal machines

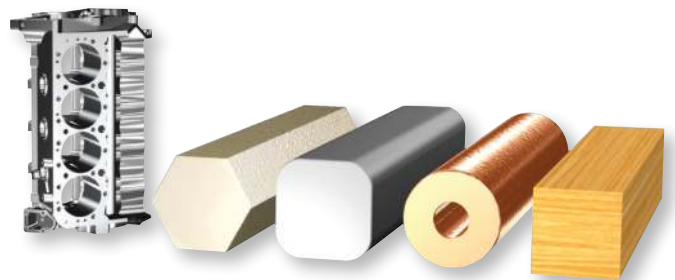

Width x Thickness		Pitch/Rake	Material No.
in	mm		
3/4 x .035	19 x 0.90	2-3/TC-P-T	92546
		3/TC-P-T	92550
1 x .035	27 x 0.90	2-3/TC-P-T	92507
		3/TC-P-T	92552
1 x .050	27 x 1.30	3/TC-P-T	92553
1-1/4 x .042	34 x 1.10	3/TC-P-T	92513
1-1/4 x .050	34 x 1.30	3/TC-P-T	92555

P - Positive rake | TC - Triple chip | T - Trapezoid set

Furnished in welded bands.

Special products on request.



CARBIDE GRIT / DIAMOND GRIT

CARBIDE GRIT

ADVANZ™ CG

Starrett® Advanz™ CG

Starrett® Advanz™ CG

FEATURES

- With continuous or gulletted cutting edge
- High fatigue resistance

BENEFITS

- Ideal for cutting hard and/or abrasive materials
- Precise cuts and excellent finishing
- Superior durability



Width x Thickness		Edge Type	Grade	Material No.
in	mm			
1/4 x .020	6 x 0.50	Gullet	Medium	95401
		Gullet	Medium	95403
3/8 x .025	10 x 0.65	Gullet	Medium/Coarse	95404
		Continuous	Medium	95406
1/2 x .020	13 x 0.50	Continuous	Medium	95414
		Gullet	Medium	95407
1/2 x .025	13 x 0.65	Gullet	Medium/Coarse	95408
		Continuous	Medium	95410
		Gullet	Medium	95416
		Gullet	Medium/Coarse	95417
3/4 x .032	19 x 0.80	Gullet	Coarse	95418
		Continuous	Medium	95419
		Continuous	Coarse	95421
		Gullet	Medium/Coarse	95422
1 x .035	25 x 0.90	Gullet	Coarse	95423
		Continuous	Medium	95425
1-1/4 x .035	32 x 0.90	Gullet	Coarse	95430
		Continuous	Coarse	95431
1-1/4 x .042	32 x 1.10	Gullet	Medium/Coarse	95432
1-1/2 x .042	38 x 1.10	Gullet	Coarse	95440


Furnished in welded bands. 100' and 250' coils.
Special products on request.

Cat. No.	EDP	Length		Width x Thickness		Pitch/Rake
		in	cm	in	mm	
CG4CM	19954	44-7/8	114	1/2 x .020	13 x 0.50	Continuous

S - Straight (Zero) rake | W - Wavy Set, Zero rake | P - Positive rake
Packaged 1 per box

APPLICATIONS

- Steel-belted tires
- Composite materials
- Reinforced plastics
- Composite Graphite
- Case-Hardened steels
- Fiberglass

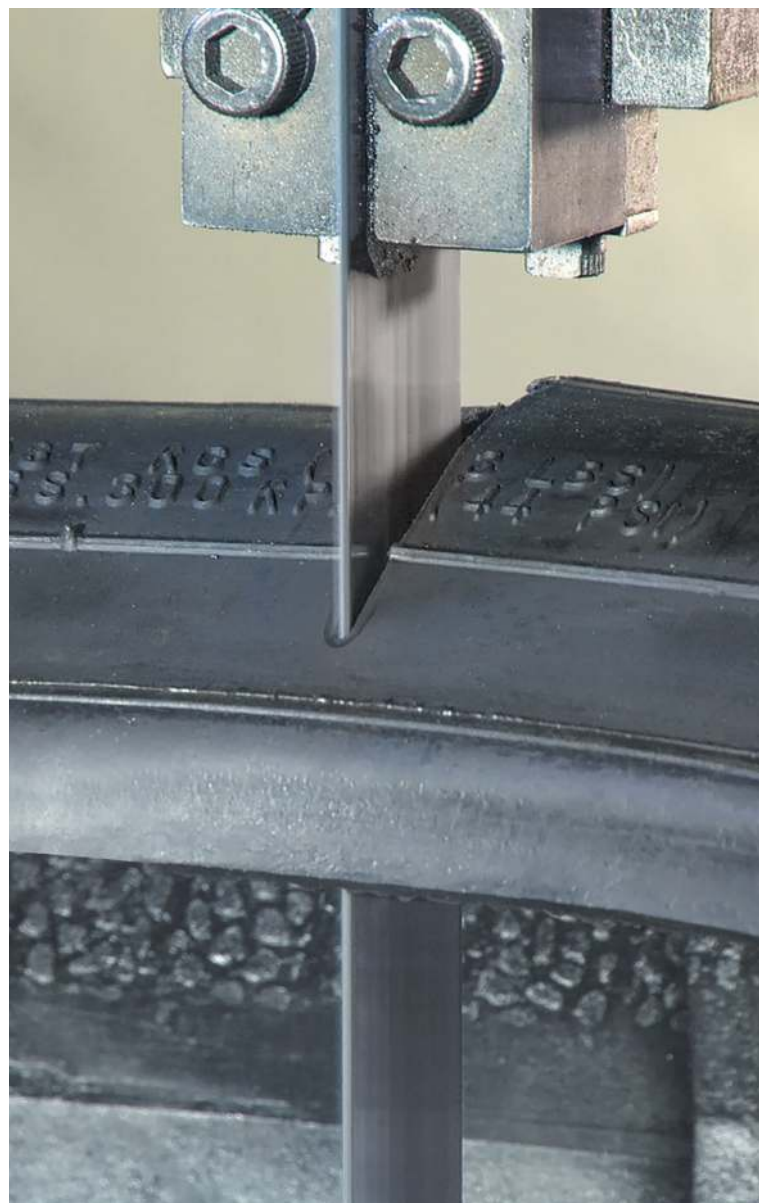

DIAMOND GRIT

ADVANZ™ DG

FEATURES


- Cutting edge coated with diamond grains
- Continuous cutting edge
- High strength body

BENEFITS

- Ideal for cutting abrasive materials that conventional blades cannot cut
- Precise cuts and excellent finishing
- Exceptional durability and fatigue resistance

APPLICATIONS


- Glass
- Glazed ceramic
- Silicon
- Graphite
- Fiberglass
- Stones
- Pyrex
- Ideal for machines that have high cutting speed




Width x Thickness in mm	Edge Type	Grit Size	Grade	Material No.
1/2 x .020 13 x 0.50	Continuous	40/50	Medium Coarse	95122
		60/80	Medium Fine	95123
		100/120	Fine	95124
3/4 x .020 19 x 0.50	Continuous	40/50	Medium Coarse	95125
		60/80	Medium Fine	95126
		100/120	Fine	95127
3/4 x .040 19 x 1	Continuous	170/200	Extra Fine	95128
		30/40	Coarse	95129
		40/50	Medium Coarse	95243
1 x .020 25 x 0.50	Continuous	60/80	Medium Fine	95244
		100/120	Fine	95245
		170/200	Extra Fine	95246
1 x .040 25 x 1	Continuous	20/30	Extra Course	95247
		30/40	Coarse	95248
		40/50	Medium Coarse	95249
1-1/4 x .020 32 x 0.50	Continuous	60/80	Medium Fine	95250
		40/50	Medium Coarse	95251
		60/80	Medium Fine	95252
1-1/4 x .040 32 x 1	Continuous	100/120	Fine	95253
		20/30	Extra Coarse	95254
		30/40	Coarse	95255
1-1/2 x .020 38 x 0.50	Continuous	60/80	Medium Fine	95256
		40/50	Medium Coarse	95257
		30/40	Coarse	95258
2 x .040 50 x 1	Continuous	30/40	Coarse	95259
		60/80	Medium Fine	95260

Furnished in welded bands only.
Diamond Grit blades are Made-to-Order items.
Longer standard lead time applies - inquire for details.
Special products on request.

Starrett® Advanz™ DG

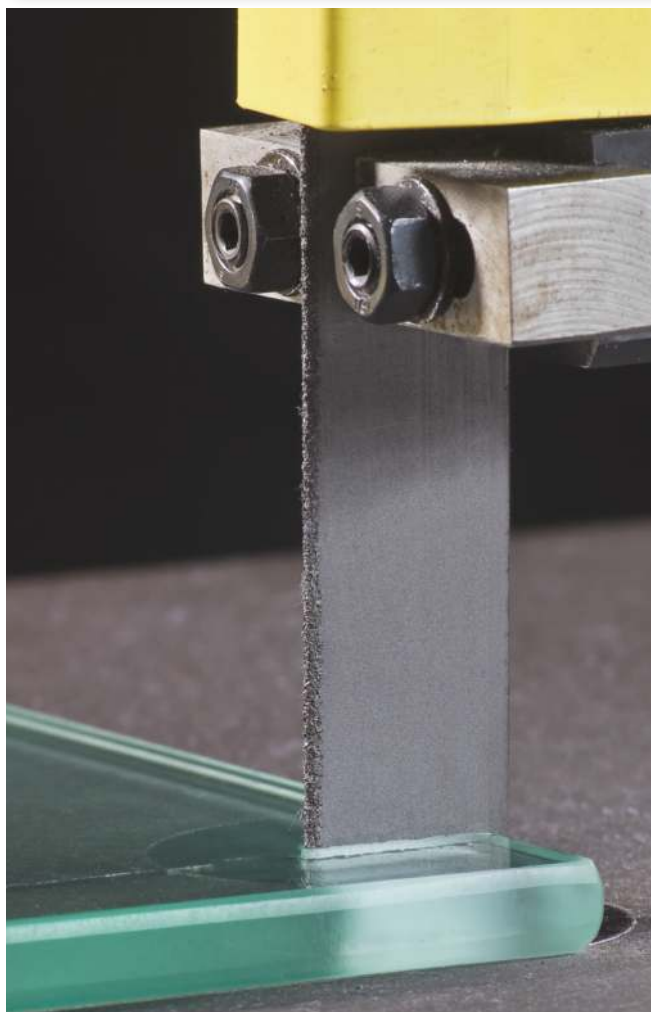

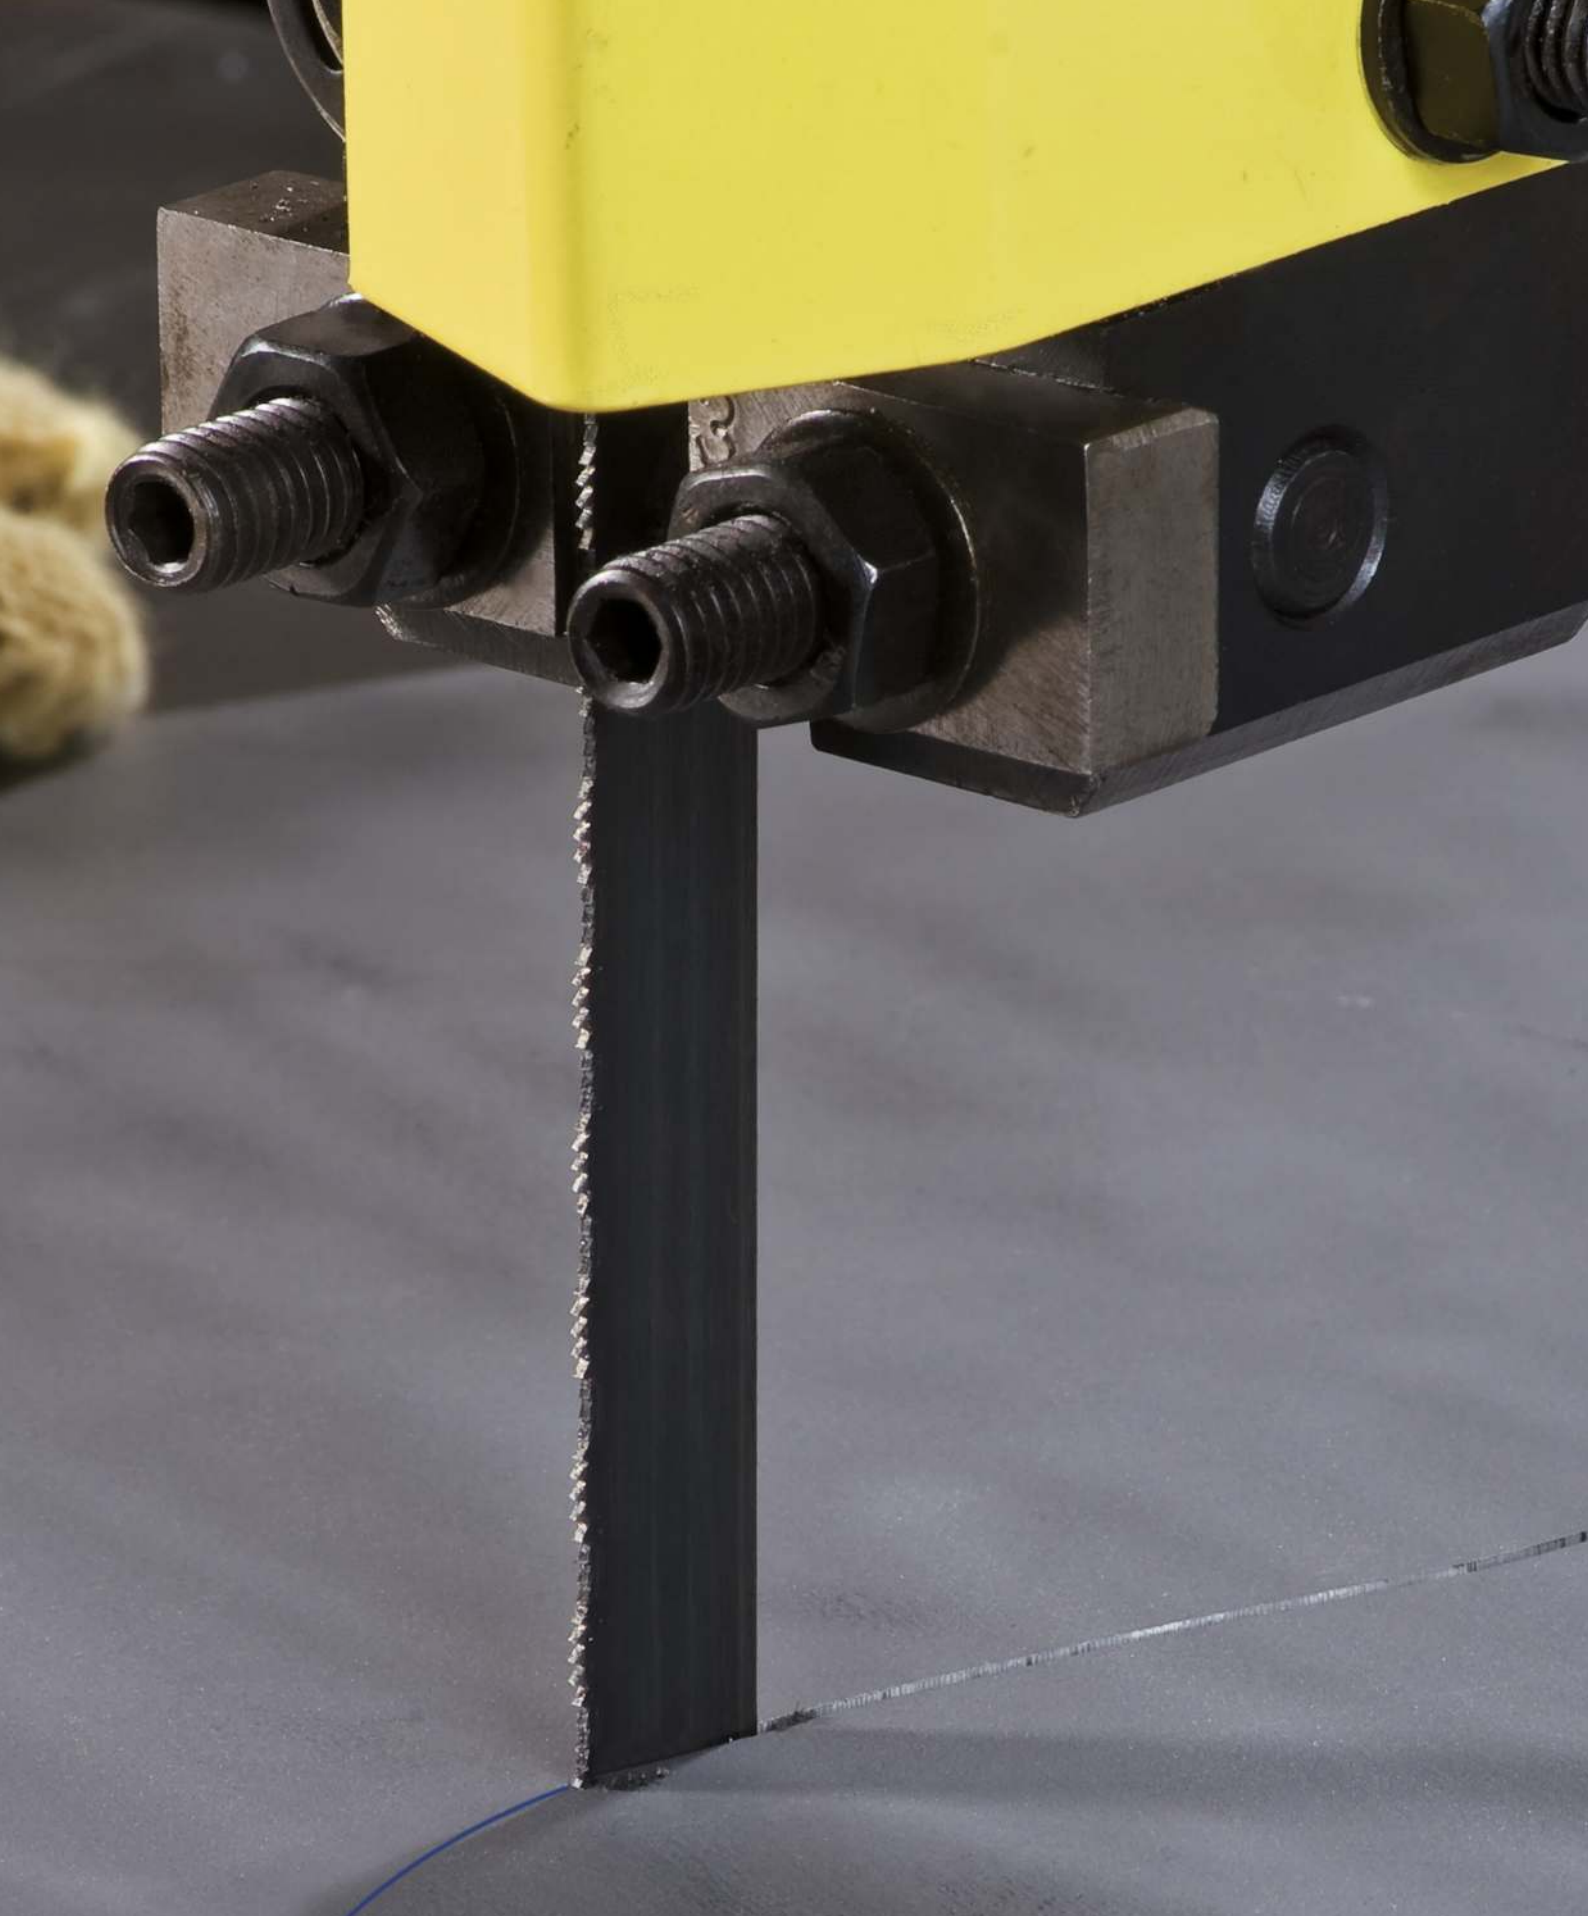

CARBON

CARBON

DURATEC™ SFB

Starrett® Duratec™ SFB

FEATURES



- Made from special high carbon steel
- Flexible back

BENEFITS

- Contour and straight cutting
- Economical
- Can be welded with "standard" welders

APPLICATIONS

- Easy-to-machine carbon steel
- Non-ferrous metals
- Composites and plastics
- Plywood and MDF
- Cardboard
- Ideal for light vertical and horizontal machines
- Mechanical workshops, toolroom, carpentry, etc.

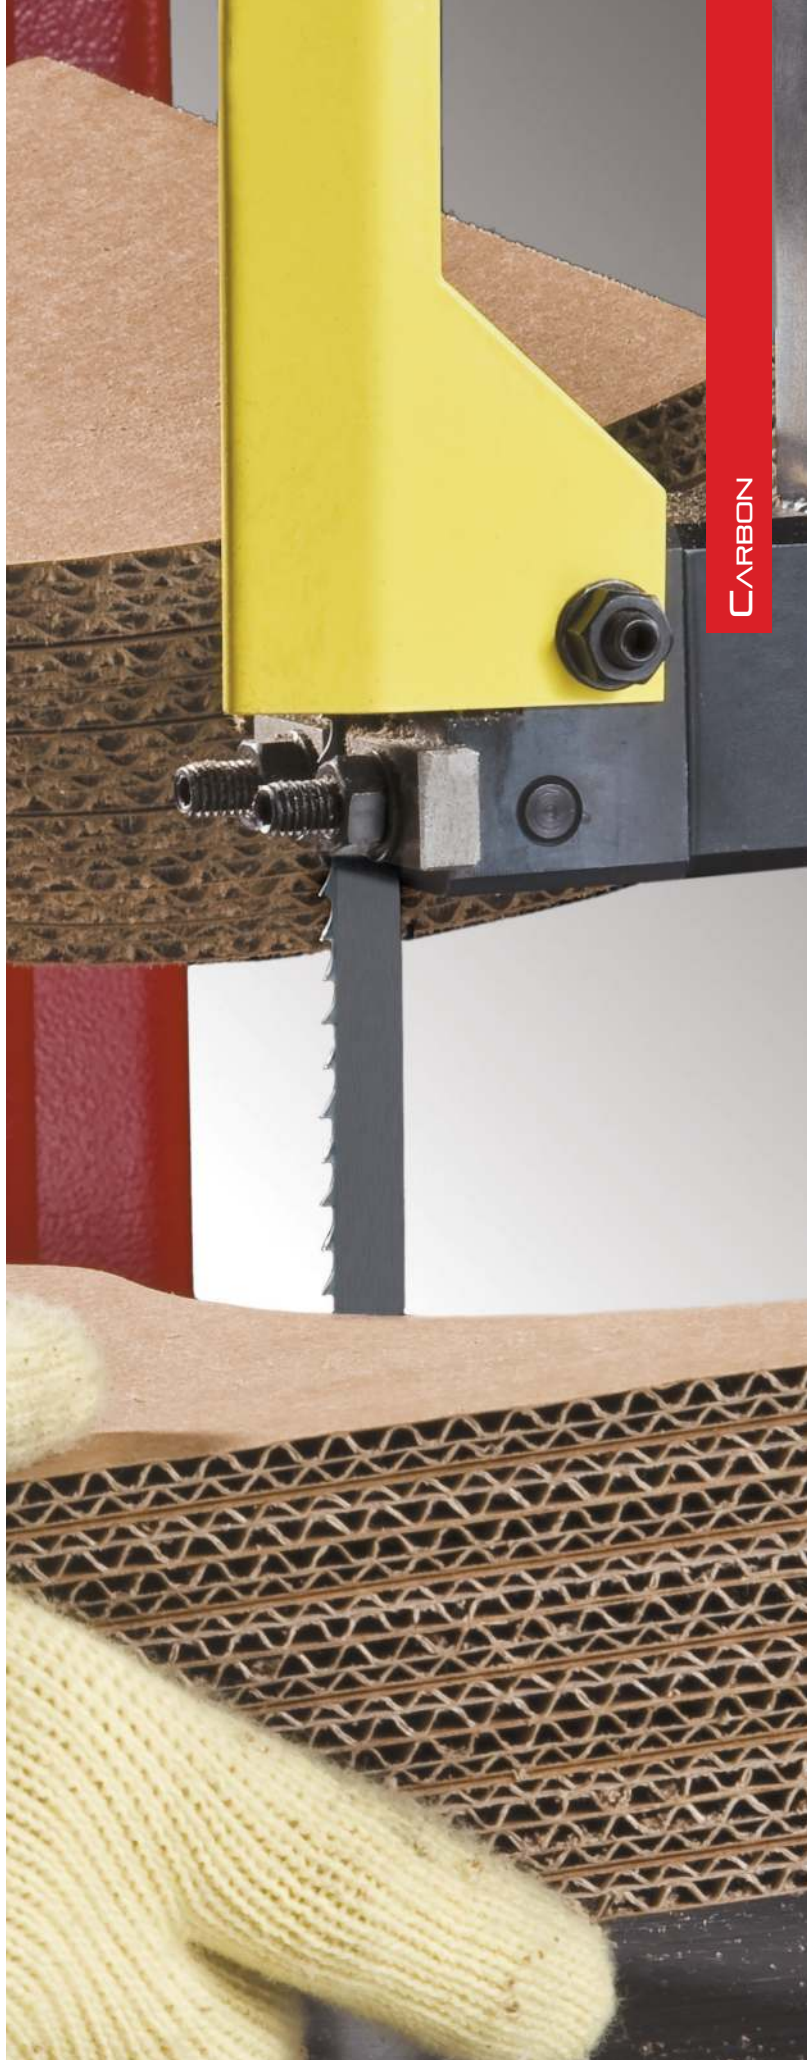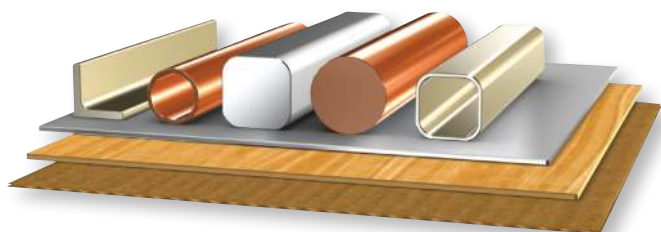

CARBON



DURATEC™ SFB

Width x Thickness		Pitch/Rake	Material No.
in	mm		
1/8 x .025	3 x 0.65	14/RG-S-R	91050
		18/RG-S-W	91060
3/16 x .025	5 x 0.65	4/SK-S-R	91080
		10/RG-S-R	91090
1/4 x .025	6 x 0.65	4/SK-S-R	91120
		4/HH-P-R	91130
		6/SK-S-R	91140
		6/RG-S-R	91151
		6/HH-P-R	91147
		10/RG-S-R	91161
		14/RG-S-R	91181
		18/RG-S-W	91190
		24/RG-S-W	91204
		32/RG-S-W	91210
		3/HL-P-R	91230
		4/SK-S-R	91240
3/8 x .025	10 x 0.65	4/HH-P-R	91250
		6/SK-S-R	91265
		6/RG-S-R	91261
		6/HH-P-R	91264
		8/RG-S-R	91271
		10/RG-S-R	91281
		14/RG-S-R	91291
		18/RG-S-R	91300
		24/RG-S-W	91307
		3/HH-P-R	91930
3/8 x .032	10 x 0.80	3/HL-P-R	91330
		4/SK-S-R	91340
		4/HH-P-R	91350
		6/SK-S-R	91372
		6/RG-S-R	91361
		6/HH-P-R	91373
1/2 x .025	13 x 0.65	8/RG-S-R	91374
		10/RG-S-R	91380
		14/RG-S-R	91401
		18/RG-S-R	91420
		24/RG-S-W	91430

RG - Regular tooth profile | SK - Skip tooth profile | S - Straight (Zero) rake | R - Raker set | W - Wavy set
HL - Hook Low tooth profile | HH - Hook High tooth profile | P Positive rake

Available in 100' (30m), 250' (75m), 500' (150m) coils and welded bands.

All coils supplied within plus or minus 10% of ordered size.

Special products on request.

Width x Thickness		Pitch/Rake	Material No.
in	mm		
5/8 x .032	16 x 0.80	3/HL-P-R	91434
		3/SK-S-R	91435
		10/RG-S-R	91450
		14/RG-S-R	91471
		3/SK-S-R	91510
3/4 x .032	19 x 0.80	3/HL-P-R	91515
		4/SK-S-R	91529
		4/HH-P-R	91528
		6/RG-S-R	91531
		8/RG-S-R	91550
		10/RG-S-R	91570
		14/RG-S-R	91621
		18/RG-S-R	91622
		2/HL-P-R	91670
		3/SK-S-R	91680
1 x .035	25 x 0.90	3/HL-P-R	91689
		4/RG-S-R	91696
		6/RG-S-R	91701
		8/RG-S-R	91720
		10/RG-S-R	91730
		14/RG-S-R	91761

RG - Regular tooth profile | SK - Skip tooth profile | S - Straight (Zero) rake | R - Raker set | W - Wavy set
HL - Hook Low tooth profile | HH - Hook High tooth profile | P Positive rake

Available in 100' (30m), 250' (75m), 500' (150m) coils and welded bands.

All coils supplied within plus or minus 10% of ordered size.

Special products on request.

CARBON

DURATEC™ FC



Width x Thickness in mm		Pitch/Rake	Material No.
1 x .035	25 x 0.90	8/RG-S-R	91726
		10/RG-S-R	91740
		4/BC-P-R	91769

R - Raker set
 RG - Regular tooth profile | S - Straight (Zero) rake | BC - Bearcat tooth profile | P - Positive rake
 Available in 100' (30m) coils and welded bands.
 All coils supplied within plus or minus 10% of ordered size.
 Special products on request.

FEATURES

- Made of high-carbon steel with high Silicon-content
- Flexible backer for excellent fatigue resistance
- Special set design for increased frictional heat
- Unique "air scoop" tooth geometry
- Fully hardened teeth and tempered back

BENEFITS

- Ideal for cutting materials that conventional blades cannot cut
- High resistance to wear and abrasion
- Teeth specifically designed to bring oxygen into the cut to burn up the material

APPLICATIONS

- Steel-belted radial tires
- Cuts thin, ferrous sections up to 5/8" (16mm)
- Weldments, sheet metal, unconventional shapes
- Vertical machines with speeds up to 15,000 SFPM



CARBON

BAND KNIVES

FEATURES


- Available with straight, scallop or wavy tooth cutting edges and a single or double edge bevel
- Made of high-carbon steel and stainless steel
- Razor edge

BENEFITS

- Quick, smooth and precise cuts, with excellent finishing
- Without material waste

APPLICATIONS


- Foam
- Rubber and soft plastics
- Cardboard and paper
- Cork

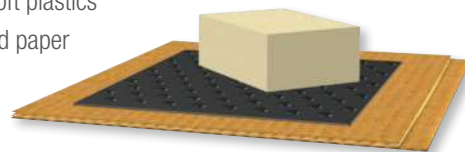

Straight Edge, Single Bevel



Straight Edge, Double Bevel

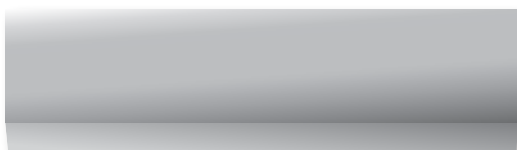

Scallop Edge, Double Bevel



Wavy Edge, Double Bevel



Width x Thickness		Edge and Bevel	Material No.
in	mm		
3/8 x .022	10 x 0.55	SC-DB	93126
		ST-SB	93135
1/2 x .022	13 x 0.55	ST-DB	93160
		SC-DB	93189
		WV-DB	93388
5/8 x .018	16 x 0.46	SC-DB	93580*
5/8 x .022	16 x 0.55	SC-DB	93590
		ST-DB	93609
		SC-DB	93637
3/4 x .022	19 x 0.55	WV-DB	93715
		SC-DB	93629
		WV-DB	93717
3/4 x .028	19 x 0.70	ST-DB	93794
		SC-DB	93796
1 x .025	25 x 0.60	SC-DB	93806
		ST-DB	93796
1 x .035	25 x 0.90	SC-DB	93809
		WV-DB	93912

ST-SB - Straight edge - Single bevel

ST-DB - Straight edge - Double bevel

SC-DB - Scallop edge - Double bevel

WV-DB - Wavy edge - Double bevel

Available in 100' (30m), 250' (75m), random length coils and welded bands.

*Stainless steel blade.

Special products on request.



WOOD CUTTING

XPW TECHNOLOGY

EXTREME PERFORMANCE FOR WOOD



XPW TECHNOLOGY

The technology and knowledge from our bi-metal range have been adapted and enhanced to meet the demands of wood applications. XPW Technology is available in both our bi-metal and high carbon blades and is designed for optimal precision, guaranteeing unparalleled cutting efficiency with minimal chips and enhanced quality in every cut.

NEW TOOTH PROFILE

Our new and exclusive tooth profile is designed for sawmill and re-saw applications, ensuring precision at high speeds. It is compatible with the most popular grinders on the market.


FEATURES & BENEFITS

- Superior cutting finish
- Enhanced durability for increased product lifespan
- High fatigue resistance ensures high-quality cuts and superior durability

GRINDING WHEEL FOR REGRINDING

To complement the XPW technology, we offer a new range of grinding wheels.

Outside Diameter x Bore Diameter in	mm	TPI	Catalog No.
6 x 1.26	150 x 32	1.1	REB-22.22
6 x 1.26	150 x 32	1.3	REB-20

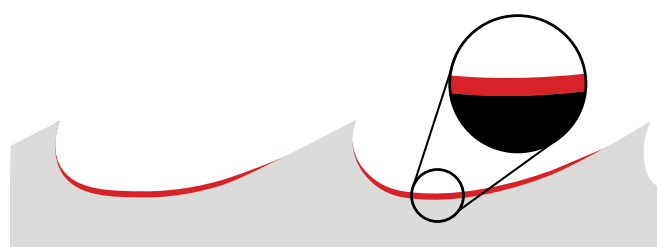

XPW Technology includes a deeper gullet when compared to previous Woodpecker blades.



WOOD CUTTING

WOODPECKER™ PREMIUM

CARBON STEEL



FEATURES

- Hardened spring-tempered steel back
- Positive angle precision set teeth
- Thin kerf available
- XPW technology on select materials

BENEFITS

- Available as thin as .020" (0.50mm) for contour cutting fine hardwoods, thicker blades are also available for tougher tasks, such as grade lumber re-saws and pallet dismantling work
- Longer life and faster cutting with less feed
- High production rates and increased yields
- Can be re-sharpened

APPLICATIONS

- Blades are available for all band saws
- Capable of cutting softwoods, hardwoods and exotic woods
- Excels in a variety of applications including cutting lumber, boards and panels
- XPW technology ideal for sawmill and re-saw applications

Width x Thickness		Tooth Shape	Tooth Pitch (TPI)	Rake	Material No.	XPW
in	mm					
1/4 x .020	6.5 x 0.50	Skip	6	SK-S-R	91992	-
3/8 x .022	10 x 0.55	Hook	4	HK-P-R	91996	-
		Skip	6	SK-S-R	91997	-
1/2 x .022	13 x 0.55	Hook	3	HK-P-R	92000	-
		Hook	4	HK-P-R	92001	-
		Skip	6	SK-S-R	92002	-
		Hook	3	HK-P-R	92003	-
5/8 x .022	16 x 0.55	Hook	4	HK-P-R	92004	-
		Hook	3	HK-P-R	92007	-
3/4 x .028	19 x 0.70	Hook	3	HK-P-R	92007	-
1 x .023	27 x 0.55	Hook	3	HK-P-R	92010	-
1 x .035	27 x 0.90	Hook	1.3	HK-P-R	92035	XPW
		Hook	2	HK-P-R	92036	-
1-1/4 x .035	32 x 0.90	Hook	1.3	HK-P-R	92043	XPW
		Hook	1.1	HK-P-R	92042	XPW
1-1/4 x .042	32 x 1.10	Hook	1.1	HK-P-R	92017	XPW
		Hook	1.3	HK-P-R	92018	XPW
1-1/2 x .042	38 x 1.10	Hook	1.1	HK-P-R	92022	XPW
2 x .042	50 x 1.10	Hook	1.1	HK-P-R	92026	XPW
2-9/16 x .042	65 x 1.10	Hook	1.1	HK-P-R	92030	XPW

HK - Hook tooth profile | P - Positive rake | R - Raker set

SK - Skip tooth profile | S - Straight (zero) rake | R - Raker set

Available in 100' (30m), 250' (75m), 500' (150m), random length coils and welded bands

All coils supplied within plus or minus 10% of ordered size.

Special products on request.



WOOD CUTTING

WOOD CUTTING

WOODPECKER™ PRO

BI-METAL



FEATURES


- Manufactured from high-speed steel M42 containing 8% cobalt
- Electron beam welded bi-metal construction
- Rockwell tooth hardness C67-69 ensures longer blade life
- XPW technology available on select materials

BENEFITS

- Wide range widths and thickness to cover fine contour cutting and tougher cutting applications like lumber re-saws and pallet dismantling work
- Increased blade lifespan with bi-metal construction and tooth geometry
- High fatigue resistance ensures long lasting durability
- Improved cutting performance producing precise cuts with minimal waste
- Can be resharpened

APPLICATIONS

- Blades are available for all band saws
- Highly effective on all types of softwoods, hardwoods and exotic woods
- XPW technology ideal for sawmill and re-saw applications

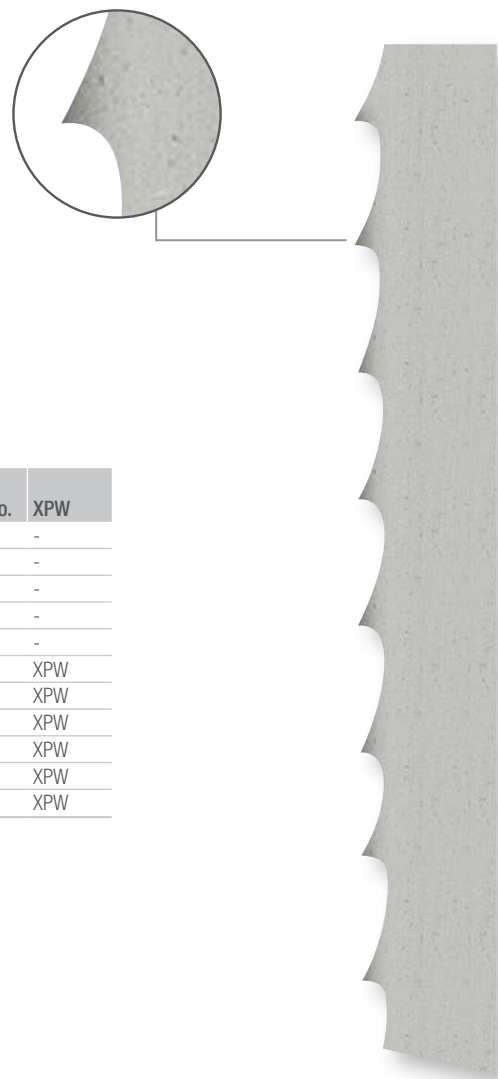

Width x Thickness		Tooth Shape	Tooth Pitch (TPI)	Rake	Material No.	XPW
in	mm					
1/4 x .025	6.5 x 0.65	Hook	6	HK-P-R	92100	-
3/8 x .025	10 x 0.65	Hook	4	HK-P-R	92101	-
1/2 x .025	13 x 0.65	Hook	3	HK-P-R	92102	-
3/4 x .035	19 x 0.90	Hook	3	HK-P-R	92103	-
1 x .035	27 x 0.90	Hook	2	HK-P-R	92104	-
1-1/4 x .035	34 x 0.90	Hook	1.1	HK-P-R	92105	XPW
		Hook	1.3	HK-P-R	92106	XPW
1-1/4 x .042	34 x 1.10	Hook	1.1	HK-P-R	92109	XPW
		Hook	1.3	HK-P-R	92108	XPW
1-1/2 x .050	41 x 1.30	Hook	1.1	HK-P-R	92110	XPW
2 x .063	54 x 1.30	Hook	1.1	HK-P-R	92111	XPW

HK - Hook tooth profile | P - Positive rake | R - Raker set
 Available in 100' (30m), 250' (75m), random length coils and welded bands.
 All coils supplied within plus or minus 10% of ordered size.
 Special products on request.

WOOD CUTTING

WOODPECKER™ CT

CARBIDE TIPPED

NEW
PRODUCT

AN IDEAL SOLUTION
FOR CUTTING HARD
AND ABRASIVE WOOD!



FEATURES

- Carbide-tipped teeth for enhanced strength
- Teeth precision-ground with triple sharpening for superior cutting
- Aggressively angled teeth for optimal cutting efficiency

BENEFITS

- High fatigue resistance for lasting durability
- Excellent cutting finish
- Contour cutting for versatile applications
- Reduces cutting time, improving productivity

APPLICATIONS

- Blades are available for all band saws
- Superior performance for cutting hard, abrasive and frozen wood especially in high-volume production cutting environments
- Ideal for use on railroad ties, hardwoods and exotic woods

Width x Thickness		Tooth Pitch (TPI)	Rake	Kerf (Inches)	Material No.
in	mm				
1/2 x .032	13 x 0.80	3	WCT-P-T	0.051	92200
1/2 x .035	13 x 0.90	3	WCT-P-T	0.062	92204
3/4 x .035	19 x 0.90	3	WCT-P-T	0.062	92205
1 x .035	27 x 0.90	1.3	WCT-P-T	0.053	92201
		3	WCT-P-T	0.062	92206
1-1/4 x .042	34 x 1.10	1.3	WCT-P-T	0.060	92202
		3	WCT-P-T	0.068	92207
2 x .035	54 x 0.90	1.3	WCT-P-T	0.053	92203

WCT - Woodpecker Carbide Tipped | P - Positive rake | T - Trapezoid set
Furnished in welded bands.
Special products on request.





FOOD PROCESSING SOLUTIONS

SKINNER BLADES



STAINLESS STEEL RECIPROCATING SAW BLADES



CHECK OUT OUR COMPLETE FOOD
PROCESSING LINE HERE:

Starrett®

(978) 249-3551 • starrett.com

Follow us!





FOOD PROCESSING

FOOD PROCESSING

MEATKUTTER™ PREMIUM

MKP

FEATURES

- High carbon steel with a polished finish
- Precision ground, hardened teeth
- Engraved laser-etched identification
- USDA approved

BENEFITS

- Highly durable blades with stronger teeth
- Fast, smooth, and clean cuts
- Less kerf loss per cut and higher yield
- Guarantee of origin and traceability

APPLICATIONS

- Great general-purpose blade for fresh meat, frozen meat and prepared foods
- Suitable for cutting meat, bone-in or boneless
- Ideal for butcher shops, supermarkets, meatpacking, case ready facilities and secondary cutting operations

MEAT TYPES

- Fresh, frozen, bone-in and boneless
- Poultry
- Seafood and fish
- Beef, pork, lamb, goat and bison

Width x Thickness in	mm	Pitch/Rake	Material No.
1/2 x .022	13 x 0.55	3/HK-P-A	94310
		4/HK-P-A	94311
		6/SK-S-A	94312
5/8 x .018	16 x 0.46	4/HK-P-A	94314
		6/SK-S-A	94315
5/8 x .022	16 x 0.55	3/HK-P-A	94316
		4/HK-P-A	94317
		8/RG-S-A	94328
5/8 x .025	16 x 0.65	3/HK-P-A	94325
		4/HK-P-A	94326
3/4 x .022	19 x .055	3/HK-P-A	94318
		4/HK-P-A	94319
		8/RG-S-A	94320

HK - Hook tooth profile | P - Positive rake | A - Alternate set

SK - Skip tooth profile | S - Straight (zero) rake | RG - Regular tooth profile

Available in 100' (30m), 250' (75m), 500' (150m), random length coils and welded bands.

All coils supplied within plus or minus 10% of ordered size.

Special products on request.



Starrett®

**Meatkutter™
Premium**

5/8 x .018"

5/8 x .022"

16 x 0.46mm

X6

OP21221504



FOOD PROCESSING

MEATKUTTER™ STAINLESS MKS

FEATURES

- Stainless steel AISI 420
- Rust-proof
- Precision ground teeth
- Engraved laser-etched identification
- USDA approved

BENEFITS

- Highly resistant to rust to maintain the perfect condition of blades quality
- Fast, smooth and clean cuts
- Durable and corrosion resistant
- Guarantee of origin and traceability

APPLICATIONS

- Fresh or frozen meat with bone or boneless
- Suitable for butcher shops, supermarkets, meatpacking, case ready facilities and secondary cutting operations
- Best for seafood processing and other high corrosion environments
- Ideal for the medical and science industries

MEAT TYPES

- Seafood and fish
- Fresh, frozen, bone-in and boneless
- Beef, pork, lamb and goat
- Poultry

Width x Thickness		Pitch/Rake	Material No.
in	mm		
5/8 x .018	16 x 0.46	4/HK-P-A	94321
		6/SK-S-A	94322
		10/RG-S-A	94327

HK - Hook tooth profile | P - Positive rake | A - Alternate set | S - Straight (zero) rake
 SK - Skip tooth profile | RG - Regular tooth profile
 Available in 100' (30m), 250' (75m), 500' (150m), random length coils and welded bands
 All coils supplied within plus or minus 10% of ordered size.
 Special products on request

Starrett®

**Meatkutter™
Stainless Steel**

5/8 x .018"
16 x 0.46mm **X6** OP21221688

FOOD PROCESSING

CARCASSKUTTER™ PREMIUM CKP

FEATURES

- Polished high-carbon steel
- Precision ground, hardened, and annealed teeth
- 3 or 4 teeth per inch and excellent balance of width and thickness
- Engraved laser-etched identification
- USDA approved

BENEFITS

- Highly durable blades with stronger teeth
- Fast, aggressive, straight, accurate cuts with less kerf loss per cut
- Optimum blade flexibility for longer operation
- Guarantee of origin and traceability

APPLICATIONS

- Carcass splitting of cattle, pig, lamb and goat
- Designed for kill/harvest and further carcass cutting applications
- Ideal for abattoirs, slaughterhouses, meatpacking, processing plants and cold storage facilities

MEAT TYPES

- Animal carcass cuts
- Beef, pork, lamb, goat and bison




Width x Thickness		Pitch/Rake	Material No.
in	mm		
3/4 x .022	19 x 0.55	3/HK-P-A	94370
		4/HK-P-A	94371

HK - Hook tooth profile | P - Positive rake | A - Alternate set

Available in 100' (30m), 250' (75m), 500' (150m), random length coils and welded bands
All coils supplied within plus or minus 10% of ordered size.

Special products on request

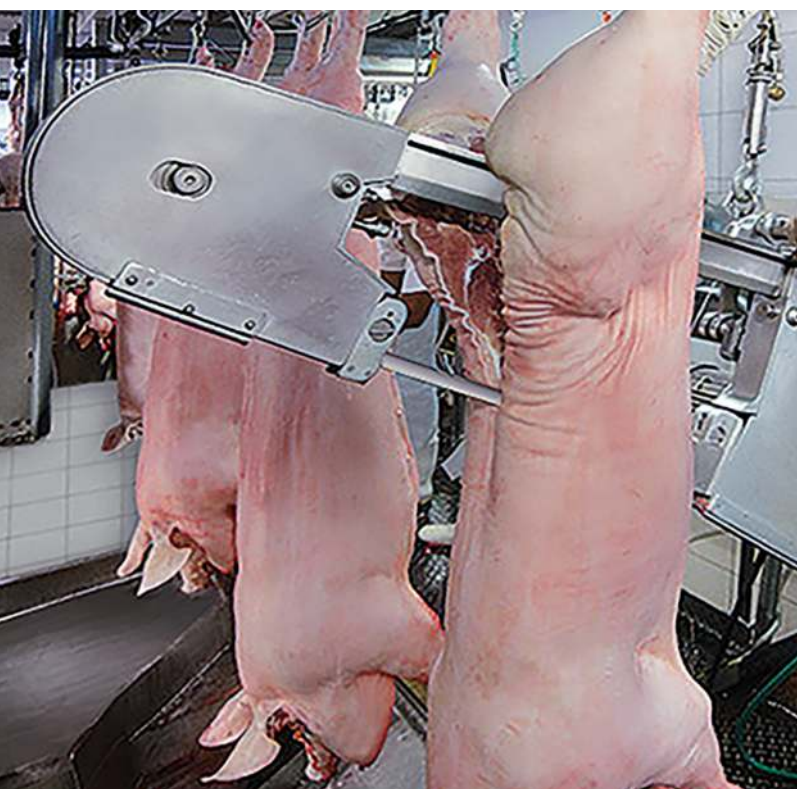



FOOD PROCESSING

MEATKUTTER™ FROZEN MKF

FEATURES

- High carbon steel with polished finish
- Precision ground, hardened teeth
- Variety of width, thickness, and teeth per inch (TPI)
- Engraved laser-etched identification
- USDA approved

BENEFITS

- Highly durable blades with stronger teeth
- Fast and precise cuts. Longer operation and increased yield
- Accurate, balanced, sharp and fast cutting action with less kerf loss per cut
- Guarantee of origin and traceability

APPLICATIONS

- Designed to cut frozen proteins as low as -4°F (-20°C)
- Frozen fish, frozen meat and fish blocks
- Suitable for butcher shops, meatpacking and case ready facilities
- Ideal for fish and seafood processors, supermarkets and cold storage facilities

MEAT TYPES

- Frozen fish and seafood
- Frozen poultry
- Frozen beef, pork, lamb and goat



Width x Thickness		Pitch/Rake	Material No.
in	mm		
5/8 x .014	16 x 0.35	3/HK-P-A	94360
5/8 x .016	16 x 0.41	3/HL-P-A	94367
5/8 x .020	16 x 0.50	3/HK-P-A	94361
		4/HK-P-A	94362
3/4 x .022	19 x 0.55	3/HK-P-A	94363
1 x .023	27 x 0.60	3/HK-P-A	94364
1 x .032	27 x 0.80	3/HL-P-A	94357
1-1/4 x .032	34 x 0.80	2/HK-P-A	94365
2 x .035	50 x 0.90	1.3/HK-P-A	94366

HK - Hook tooth profile | P - Positive rake | A - Alternate set | HL - Hook, low profile

Available in 100' (30m), 250' (75m), 500' (150m), random length coils and welded bands

All coils supplied within plus or minus 10% of ordered size.

Special products on request

FOOD PROCESSING

MEATKUTTER™ FROZEN BI-METAL MKB

FEATURES

- Bi-metal high-speed steel band saw blade
- Hardened teeth and backing
- Exclusive positive rake angle
- Special tooth set

BENEFITS

- Greater durability compared to conventional blades
- Fast, clean cuts
- Accurate cuts with less food waste
- Easy cutting

APPLICATIONS

- Designed to cut frozen proteins as low as -76°F (-60°C)
- Large fish
- Suitable for meat packing, portioning, secondary cutting operations and cold storage facilities
- Ideal for fish and seafood processing

MEAT TYPES

- Large fish
- Frozen fish and seafood
- Frozen poultry
- Frozen beef, pork, lamb and goat

Width x Thickness		Pitch/Rake	Material No.
in	mm		
1-1/4 x .035	34 x 0.90	3/HK-P-A	94380

HK - Hook tooth profile | P - Positive rake | A - Alternate set

Available in 100' (30m), 250' (75m), 500' (150m), random length coils and individually wrapped welded bands

All coils supplied within plus or minus 10% of ordered size.

Special products on request





Starrett

POWER HACKSAWS

POWER HACKSAWS

BI-METAL HSS-BS

CUTTING EDGE OF HIGH-SPEED STEEL

FEATURES

- Available in metric and inch
- Hardened and tempered high-speed steel teeth
- Tough alloy steel back resistant to shock and breakage

BENEFITS

- Alloy back resists fatigue under the most adverse conditions

APPLICATIONS

- Ideal for all general steel cutting
- Works well in a wide variety of applications, including interrupted cuts



CUTTING CHART FOR POWER HACKSAW BLADES-BS AND RS

Cross Section to be Cut	Material Thickness				Bow Speeds in Strokes per Minute **
	Up to 3/4" (20mm) Pitch*	From 3/4" to 1-1/2" (From 20mm to 40mm)	From 1-1/2" to 3-1/2" (From 40mm to 90mm)	Above 3-1/2" (Above 90mm)	
Low Carbon Steel	14-10	10-6	6-4	4-2-1/2	70-90
Medium Carbon Steel	14-10	10-6	6-4	4-2-1/2	60-80
High Carbon Steel	14-10	10-6	6-4	4-2-1/2	55-70
Carbon Low Alloy Steel	14-10	10-6	6-4	4-2-1/2	65-80
Carbon High Alloy Steel	14-10	10-6	6-4	4-2-1/2	45-60
Easy to machine steel	14-10	10-6	6-4	4-2-1/2	80-100
Tool Steel	14-10	10-6	6-4	4-2-1/2	55-70
Low-Alloy High-speed steel	14-10	10-6	6-4	4-2-1/2	50-60
High-Alloy High-speed steel	14-10	10-6	6-4	4-2-1/2	45-55
Cast Iron Class 20	14-10	10-6	6-4	4-2-1/2	70-80
Cast Iron Class 40	14-10	10-6	6-4	4-2-1/2	65-75
Cast Iron Class 60	14-10	10-6	6-4	4-2-1/2	40-55
Malleable Cast Iron	14-10	10-6	6-4	4-2-1/2	65-75
Austenitic Cast Iron	14-10	10-6	6-4	4-2-1/2	40-55
Inconel and Monel	14-10	10-6	6-4	4-2-1/2	40-55
Stainless Steels	14-10	10-6	6-4	4-2-1/2	50-60
Copper	14-10	10-6	6-4	4-2-1/2	95-140
Bronze	14-10	10-6	6-4	4-2-1/2	85-105
Brass	14-10	10-6	6-4	4-2-1/2	90-110
Aluminum	14-10	10-6	6-4	4-2-1/2	100-140

*The blade should be tensioned correctly.

*Since you have two options for each thickness range, use a finer pitch (more teeth per inch) for thinner sections and coarser pitches (fewer teeth per inch) for thick sections.

** For materials with width higher than 3", decrease at least 20% of cutting rates.



POWER HACKSAWS

BI-METAL HSS-BS

CUTTING EDGE OF HIGH-SPEED STEEL

Cat. No.	EDP	Length x Width x Thickness		TPI (TP/25mm)	Pinhole Diameter
		in	mm		
BS1210-5	40097	12 x 1-1/8 x .050	300 x 28 x 1.25	10	8.5mm
BS1214-5	40098			14	
BS1410-5	40099	14 x 1-1/8 x .050	350 x 28 x 1.25	10	
BS1414-5	40100			14	
BS1406-6	40101	14 x 1-3/8 x .062	350 x 35 x 1.6	6	10.75mm
BS1410-6	40102			10	
BS1406-7	40105	14 x 1-5/8 x .075	350 x 41 x 2	6	
BS1706-6	40113	17 x 1-3/8 x .062	425 x 35 x 1.6	6	8.5mm
BS1710-6	40114			10	
BS1806-6	40115	18 x 1-3/8 x .062	450 x 35 x 1.6	6	10.75mm
BS1810-6	40116			10	
BS1804-7	40118	18 x 1-5/8 x .075	450 x 41 x 2	4	
BS1806-7	40119			6	

Blades from 12" (300mm) to 20" (500mm) length packaged and sold 5 blades per plastic tube.

Blades from 21" (525mm) or wider, packaged and sold 1 blade per sleeve.

POWER HACKSAWS

HIGH-SPEED STEEL-RS

HIGH-SPEED STEEL

FEATURES

- Available in metric and inch
- Fully hardened molybdenum high-speed steel

BENEFITS

- Long wear life and top performance
- Withstands heavier feed pressures providing faster cutting

APPLICATIONS

- Ideal for cutting a wide range of materials



CUTTING CHART FOR POWER HACKSAW BLADES-BS AND RS

Cross Section to be Cut	Material Thickness				Bow Speeds in Strokes per Minute **
	Up to 3/4" (20mm) Pitch*	From 3/4" to 1-1/2" (From 20mm to 40mm)	From 1-1/2" to 3-1/2" (From 40mm to 90mm)	Above 3-1/2" (Above 90mm)	
Low Carbon Steel	14-10	10-6	6-4	4-2-1/2	70-90
Medium Carbon Steel	14-10	10-6	6-4	4-2-1/2	60-80
High Carbon Steel	14-10	10-6	6-4	4-2-1/2	55-70
Carbon Low Alloy Steel	14-10	10-6	6-4	4-2-1/2	65-80
Carbon High Alloy Steel	14-10	10-6	6-4	4-2-1/2	45-60
Easy to machine steel	14-10	10-6	6-4	4-2-1/2	80-100
Tool Steel	14-10	10-6	6-4	4-2-1/2	55-70
Low-Alloy High-speed steel	14-10	10-6	6-4	4-2-1/2	50-60
High-Alloy High-speed steel	14-10	10-6	6-4	4-2-1/2	45-55
Cast Iron Class 20	14-10	10-6	6-4	4-2-1/2	70-80
Cast Iron Class 40	14-10	10-6	6-4	4-2-1/2	65-75
Cast Iron Class 60	14-10	10-6	6-4	4-2-1/2	40-55
Malleable Cast Iron	14-10	10-6	6-4	4-2-1/2	65-75
Austenitic Cast Iron	14-10	10-6	6-4	4-2-1/2	40-55
Inconel and Monel	14-10	10-6	6-4	4-2-1/2	40-55
Stainless Steels	14-10	10-6	6-4	4-2-1/2	50-60
Copper	14-10	10-6	6-4	4-2-1/2	95-140
Bronze	14-10	10-6	6-4	4-2-1/2	85-105
Brass	14-10	10-6	6-4	4-2-1/2	90-110
Aluminum	14-10	10-6	6-4	4-2-1/2	100-140

*The blade should be tensioned correctly.

*Since you have two options for each thickness range, use a finer pitch (more teeth per inch) for thinner sections and coarser pitches (fewer teeth per inch) for thick sections.

** For materials with width higher than 3", decrease at least 20% of cutting rates.



POWER HACKSAWS

HIGH-SPEED STEEL-RS

HIGH-SPEED STEEL

Cat. No.	EDP	Length x Width x Thickness		TPI	Pinhole
		in	mm	(TP/25mm)	Diameter
RS1210-5	40046	12 x 1 x .050	300 x 25 x 1.25	10	8.5mm
RS1214-5	40047			14	
RS1410-5	40049	14 x 1 x .050	350 x 25 x 1.25	10	
RS1414-5	40050			14	
RS1406-6	40051	14 x 1-1/4 x .062	350 x 32 x 1.6	6	10.75mm
RS1410-6	40052			10	
RS1610-6	40058	16 x 1-1/4 x .062	400 x 32 x 1.25	10	
RS1706-6	40062			6	
RS1710-6	40063	17 x 1-1/4 x .062	425 x 32 x 1.6	10	11.25mm
RS1806-6	40064			6	
RS1810-6	40065	18 x 1-1/4 x .062	450 x 32 x 1.6	10	
RS1804-7	40067			4	
RS1806-7	40068	18 x 1-1/2 x .075	450 x 38 x 2	6	16.75mm
RS1804-8	40070			4	
RS1806-8	40071	18 x 1-3/4 x .088	450 x 45 x 2.25	6	
RS2104-8	40075			4	
RS2106-8	40076	21 x 1-3/4 x .088	450 x 45 x 2.25	6	2-1/2 TPI
RS2404-0	40081			4	
RS3004-0	40083	30 x 2-1/2 x .100	750 x 63 x 2.5	4	

Blades from 12" (300mm) to 20" (500mm) length packaged and sold 5 blades per plastic tube.
Blades from 21" (525mm) or wider, packaged and sold 1 blade per sleeve.

Cat. No.	EDP	Length x Width x Thickness		TPI	Pinhole
		in	mm	(TP/25mm)	Diameter
Metric High-speed steel Power Hacksaw Blades (for KASTO and other metric machines)					
RS400-6	40180	16 x 1-1/4 x .075	400 x 32 x 2	6	10.5mm
RS400-10	40181			10	
RS450-4	40182	18 x 1-1/2 x .075	450 x 38 x 2	4	
RS450-6	40183			6	
RS450-10	40184	20 x 1-3/4 x .075	500 x 45 x 2	10	10.5mm
RS500-6	16171			6	
RS500-10	16172	22 x 1-3/4 x .075	550 x 45 x 2	10	
RS550-4	40173			4	
RS550-10	40185	23 x 2 x .100	575 x 50 x 2.5	10	10.5mm
RS575-4	40175			4	
RS575-6	40176	24 x 2 x .100	600 x 50 x 2.5	6	
RS600-4	16173			4	
RS600-6	16174	26 x 2-3/16 x .100	650 x 55 x 2.5	6	2-1/2 TPI
RS650-4	40186			4	
RS650-6	40187	28 x 2-3/16 x .100	700 x 55 x 2.5	6	
RS700-4	40188			4	
RS700-6	40189	34 x 2-3/8 x .118	850 x 60 x 3	6	2-1/2 TPI
RS850-4	16175			4	
RS900-2.1/2A	68716	36 x 4-1/2 x .138	900 x 114 x 3.5	2-1/2 TPI	
RS1000-2 1/2	16177			4	

Blades from 12" (300mm) to 20" (500mm) length packaged and sold 5 blades per plastic tube.
Blades from 21" (525mm) or wider, packaged and sold 1 blade per sleeve.

Bi-Metal Deep Cut



Bi-Metal Deep Cut
with Arbor



Bi-Metal Fast Cut



POWER TOOL ACCESSORIES & HAND TOOLS

EXPERTS IN CUTTING
SINCE 1880

CHECK OUT OUR COMPLETE HOLE SAW LINE HERE:

Starrett®

(978) 249-3551 • starrett.com

Follow us!





RECOMMENDATIONS AND RESOURCES

RECOMMENDATIONS

BLADE BREAK-IN


Using the right break-in procedures for a bi-metal blade ensures longer blade life, faster cuts for a longer period of time and consistent performance. Conversely, blade life can be significantly compromised if the proper break-in procedures are not followed.

Softer material such as carbon steel and aluminum:

- A. Run the normal surface feet per minute (SFPM).
- B. Adjust the feed pressure to 50% the normal cutting rate for 50-100 square inches (323-645 sq.cm).
- C. Increase to 100% cutting rate.
- D. Avoid vibration.

Harder materials such as nickel-based alloys like inconel, hardened steels, tool steels and stainless steels:

- A. Run the normal surface feet per minute (SFPM).
- B. Adjust the feed pressure to 75% of the normal cutting rate for 25-75 square inches (161-484 sq.cm).
- C. Gradually increase cutting rate to reach 100% after 50 square inches (323 sq.cm).
- D. Avoid vibration.

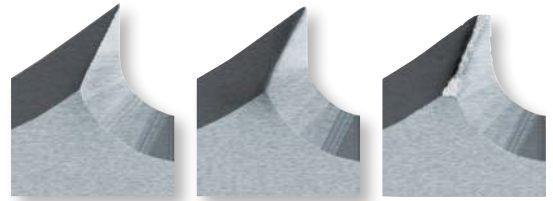


New blade with razor sharp teeth

Tooth correctly broken in

Tooth incorrectly broken in



Start to cut material at reduced cutting rate

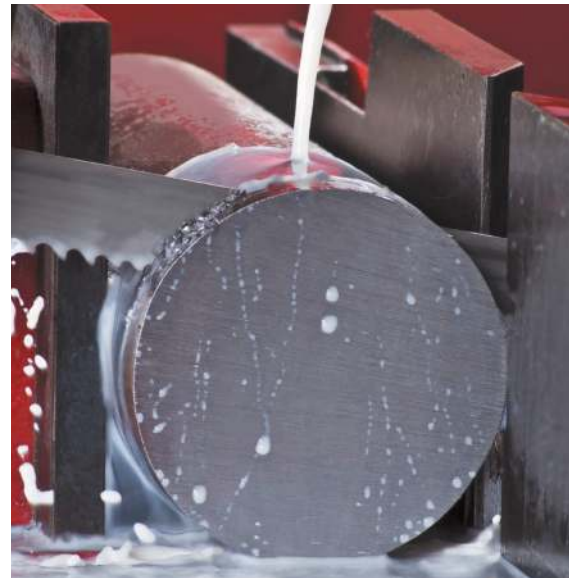

After break-in when the blade has fully entered the work-piece, increase the feed rate over a series of cuts until the recommended cutting rate is achieved.

RECOMMENDATIONS

BAND SAW BLADE INSTALLATION GUIDELINES

Always follow the machine manufacturer's instruction and recommendations for blade changes and the safe operation for the band saw machine. Starrett nor its employees shall not be held responsible for the accuracy or completeness of these guidelines.


The general information contained in the guidelines is intended to assist in the proper installation of band saw blades.

Proper blade installation achieves more efficient blade performance.


- Wear gloves when handling band saw blade




- Use eye protection, safety shoes, and hearing protection






- Select appropriate blade for cutting application
- Unfold blade properly. Do not throw. Throwing the blade will result in tooth damage that will reduce saw blade performance
- Install blade with saw teeth pointing in proper direction



- Apply appropriate tension to the blade
- Be aware of pinch points and keep hands and clothing clear of rotating blade



- Adjust guide arms to appropriate positions to workpiece
- Adjust blade guides for proper blade support
- Adjust chip brush to fully engage saw blade teeth to ensure proper chip removal



- Check hydraulic fluid levels when applicable
- Ensure appropriate cutting fluid placement and mix ratios as applicable per machine, cutting fluid, and blade manufacturer's recommendations

FOLLOW THESE INSTRUCTIONS CAREFULLY

- Follow all the safety instructions shown in the band saw machine operator's manual and on the machine labels. Recognize and read safety and warning signs such as Danger, Warning and Caution
- Follow the saw blade installation instructions on the specific make and model of the band saw machine requiring a blade change

BASIC BLADE CHANGE GUIDELINES

- Remove any chips from saw guides and band wheels
- Position chip brush away from saw
- Relieve saw blade tension and remove blade

ACCESSORIES

POCKET LASER TACHOMETER KIT WITH CASE No. S7793Z

- Powerful tachometer with 32 functions for measurements with or without contact
- From 200.000 RPM (optical measurement) to 20.000 RPM
- Measurement with contact up to 20.000 RPM
- Measurement with contact 2.000 m/min.(linear speed)
- Different measurement units: RPM, cm, inches, feet, yards etc




SAW TENSION GAGE FOR BAND SAW BLADES No. 682EMZ

- Check for proper tension in either English or metric
- Graduated in kg/cm² (0 to 4.000) and in pounds/in² (0 to 60.000)
- Supplied in a case with instructions

BAND SAW BLADE ALIGNMENT GAGE No. PT92925

This gage enables you to make sure your blade is running square to the cut.

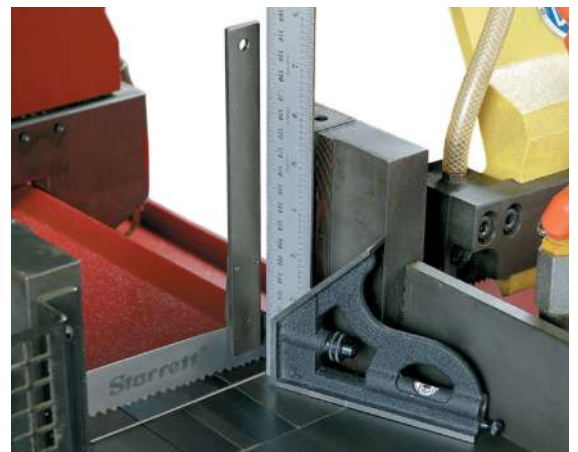

STARRETT RESOURCES

STARRETT WEBSITE

STARRETT.COM

Browse the full range of Starrett products, locate Starrett authorized distributors, and download product datasheets, white papers, user manuals and other informational documentation on the Starrett website.

FIND STARRETT ON YOUTUBE

YOUTUBE.COM/LSSTARRETT

Learn more about band saw blades and other Starrett products by watching a variety of videos available on the Starrett YouTube page.

Videos include:

- Instructional
- Product Information
- Tradeshow and Events



BAND SAW BLADE REFERENCE GUIDE BULLETIN 1037

The Band Saw Reference Guide provides basic charts and tables to help users achieve the best results with Starrett band saw blades.

Charts include:

- Cutting Table for Bi-Metal Band Saw Blades
- Troubleshooting
- Cut Rate Chart
- Cut-Off Calculations



The Band Saw Blade Reference Guide is available as a PDF at starrett.com.

STARRETT LITERATURE AT YOUR FINGERTIPS

Our digital catalogs contain all of the information you have come to expect from our printed literature, without taking up space on your desk.

FEATURES

- Access to all Starrett catalogs, brochures, datasheets and educational materials
- Easy sharing through email
- Print a page
- Quickly download the whole catalog for convenient offline viewing




BAND SAW BLADES

CUTTING RATE CHART

CUTTING RATE IN SQUARE INCHES PER MINUTE																			
Bar Diameter	Area (in ²)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Minutes Per Cut:																			
1.00	0.79	.79	.39	.26	.20	.16	.13	.11	.10	.09	.08	.07	.07	.06	.06	.05	.05	.05	.04
1.25	1.23	1.2	.61	.41	.31	.25	.20	.18	.15	.14	.12	.11	.10	.09	.09	.08	.08	.07	.07
1.50	1.77	1.8	.88	.59	.44	.35	.29	.25	.22	.20	.18	.16	.15	.14	.13	.12	.11	.10	.10
1.75	2.41	2.4	1.2	.80	.60	.48	.40	.34	.30	.27	.24	.22	.20	.19	.17	.16	.15	.14	.13
2.00	3.14	3.1	1.6	1.0	.79	.63	.52	.45	.39	.35	.31	.29	.26	.24	.22	.21	.20	.18	.17
2.25	3.98	4.0	2.0	1.3	1.0	.80	.66	.57	.50	.44	.40	.36	.33	.31	.28	.27	.25	.23	.22
2.50	4.91	4.9	2.5	1.6	1.2	1.0	.82	.70	.61	.55	.49	.45	.41	.38	.35	.33	.31	.29	.27
2.75	5.94	5.9	3.0	2.0	1.5	1.2	1.0	.85	.74	.66	.59	.54	.49	.46	.42	.40	.37	.35	.33
3.00	7.07	7.1	3.5	2.4	1.8	1.4	1.2	1.0	.88	.79	.71	.64	.59	.54	.50	.47	.44	.42	.39
3.25	8.30	8.3	4.1	2.8	2.1	1.7	1.4	1.2	1.0	.92	.83	.75	.69	.64	.59	.55	.52	.49	.46
3.50	9.62	9.6	4.8	3.2	2.4	1.9	1.6	1.4	1.2	1.1	1.0	.87	.80	.74	.69	.64	.60	.57	.53
3.75	11.04	11.0	5.5	3.7	2.8	2.2	1.8	1.6	1.4	1.2	1.1	1.0	.92	.85	.79	.74	.69	.65	.61
4.00	12.57	12.6	6.3	4.2	3.1	2.5	2.1	1.8	1.6	1.4	1.3	1.1	1.0	1.0	.90	.84	.79	.74	.70
4.25	14.19	14.2	7.1	4.7	3.5	2.8	2.4	2.0	1.8	1.6	1.4	1.3	1.2	1.1	1.0	.95	.89	.83	.79
4.50	15.9	15.9	8.0	5.3	4.0	3.2	2.7	2.3	2.0	1.8	1.6	1.4	1.3	1.2	1.1	1.1	1.0	.94	.88
4.75	17.72	17.7	8.9	5.9	4.4	3.5	3.0	2.5	2.2	2.0	1.8	1.6	1.5	1.4	1.3	1.2	1.1	1.0	1.0
5.00	19.64	19.6	9.8	6.5	4.9	3.9	3.3	2.8	2.5	2.2	2.0	1.8	1.6	1.5	1.4	1.3	1.2	1.2	1.1
5.25	21.65	21.6	10.8	7.2	5.4	4.3	3.6	3.1	2.7	2.4	2.2	2.0	1.8	1.7	1.5	1.4	1.4	1.3	1.2
5.50	23.76	23.8	11.9	7.9	5.9	4.8	4.0	3.4	3.0	2.6	2.4	2.2	2.0	1.8	1.7	1.6	1.5	1.4	1.3
5.75	25.97	26.0	13.0	8.7	6.5	5.2	4.3	3.7	3.2	2.9	2.6	2.4	2.2	2.0	1.9	1.7	1.6	1.5	1.4
6.00	28.27	28.3	14.1	9.4	7.1	5.7	4.7	4.0	3.5	3.1	2.8	2.6	2.4	2.2	2.0	1.9	1.8	1.7	1.6
6.25	30.68	30.7	15.3	10.2	7.7	6.1	5.1	4.4	3.8	3.4	3.1	2.8	2.6	2.4	2.2	2.0	1.9	1.8	1.7
6.50	33.18	33.2	16.6	11.1	8.3	6.6	5.5	4.7	4.1	3.7	3.3	3.0	2.8	2.6	2.4	2.2	2.1	2.0	1.8
6.75	35.78	35.8	17.9	11.9	8.9	7.2	6.0	5.1	4.5	4.0	3.6	3.3	3.0	2.8	2.6	2.4	2.2	2.1	2.0
7.00	34.48	38.5	19.2	12.8	9.6	7.7	6.4	5.5	4.8	4.3	3.8	3.5	3.2	3.0	2.7	2.6	2.4	2.3	2.1
7.25	41.28	41.3	20.6	13.8	10.3	8.3	6.9	5.9	5.2	4.6	4.1	3.8	3.4	3.2	2.9	2.8	2.6	2.4	2.3
7.50	44.18	44.2	22.1	14.7	11.0	8.8	7.4	6.3	5.5	4.9	4.4	4.0	3.7	3.4	3.2	2.9	2.8	2.6	2.5
7.75	47.17	47.2	23.6	15.7	11.8	9.4	7.9	6.7	5.9	5.2	4.7	4.3	3.9	3.6	3.4	3.1	2.9	2.8	2.6
8.00	50.27	50.3	25.1	16.8	12.6	10.1	8.4	7.2	6.3	5.6	5.0	4.6	4.2	3.9	3.6	3.4	3.1	3.0	2.8
8.25	53.46	53.5	26.7	17.8	13.4	10.7	8.9	7.6	6.7	5.9	5.3	4.9	4.5	4.1	3.8	3.6	3.3	3.1	3.0
8.50	56.75	56.7	28.4	18.9	14.2	11.3	9.5	8.1	7.1	6.3	5.7	5.2	4.7	4.4	4.1	3.8	3.5	3.3	3.2
8.75	60.13	60.1	30.1	20.0	15.0	12.0	10.0	8.6	7.5	6.7	6.0	5.5	5.0	4.6	4.3	4.0	3.8	3.5	3.3
9.00	63.62	63.6	31.8	21.2	15.9	12.7	10.6	9.1	8.0	7.1	6.4	5.8	5.3	4.9	4.5	4.2	4.0	3.7	3.5
9.25	67.20	67.2	33.6	22.4	16.8	13.4	11.2	9.6	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0	3.7
9.50	70.88	70.9	35.4	23.6	17.7	14.2	11.8	10.1	8.9	7.9	7.1	6.4	5.9	5.5	5.1	4.7	4.4	4.2	3.9
9.75	74.66	74.7	37.3	24.9	18.7	14.9	12.4	10.7	9.3	8.3	7.5	6.8	6.2	5.7	5.3	5.0	4.7	4.4	4.1
10.00	78.54	78.5	39.3	26.2	19.6	15.7	13.1	11.2	9.8	8.7	7.9	7.1	6.5	6.0	5.6	5.2	4.7	4.6	4.4

BAND SAW BLADES

CUTTING RATE CHART

READING THE CHIPS					
Chip Formation	Chip Condition	Chip Color	Blade Speed	Blade Feed	Other
	Thin and Tightly Curled	Silver	Correct	Decrease	Refer to Machining Recommendations for Correct Tooth Pitch
	Powdered	Silver	Decrease	Increase	
	Thick and Short	Blue or Brown	Decrease	Decrease	Check Cutting Fluid
	Thin and Curly	Silver	Correct	Correct	

Recommended Tension for Starrett Band Saw Blades

Blade Width	English	Metric
Bi-Metal and Carbide Tip: 1-1/2" and Wider	30,000 - 40,000 PSI	2,100 - 2,800 Kg/cm ²
Bi-Metal and Carbide Tip: Thru 1-1/4" Wide	25,000 - 35,000 PSI	1,800 - 2,500 Kg/cm ²
Duratec™ SFB	15,000 - 20,000 PSI	1,000 - 2,500 Kg/cm ²

The above tension ranges are supplied as a guide for normal average cutting conditions. Insufficient blade tension can affect the cutting efficiency of the blade. Excessive tension may cause breakage of band saw blades.

As a general rule of thumb, the higher end of the tension range should be used when the guide arms are further apart and the lower end of the range should be used when the guide arms are closer together.



PRECISION MAKES THE DIFFERENCE

INNOVATIVE TECHNOLOGIES FOR OVER 145 YEARS

More than 5,000 products including precision tools,
vision systems, force measurement systems, non-contact
measurement systems, profile projectors,
band saw blades, band saw machines,
hand tools and power tools accessories.

Learn more at starrett.com




Starrett®

(978) 249-3551 • starrett.com

Follow us!



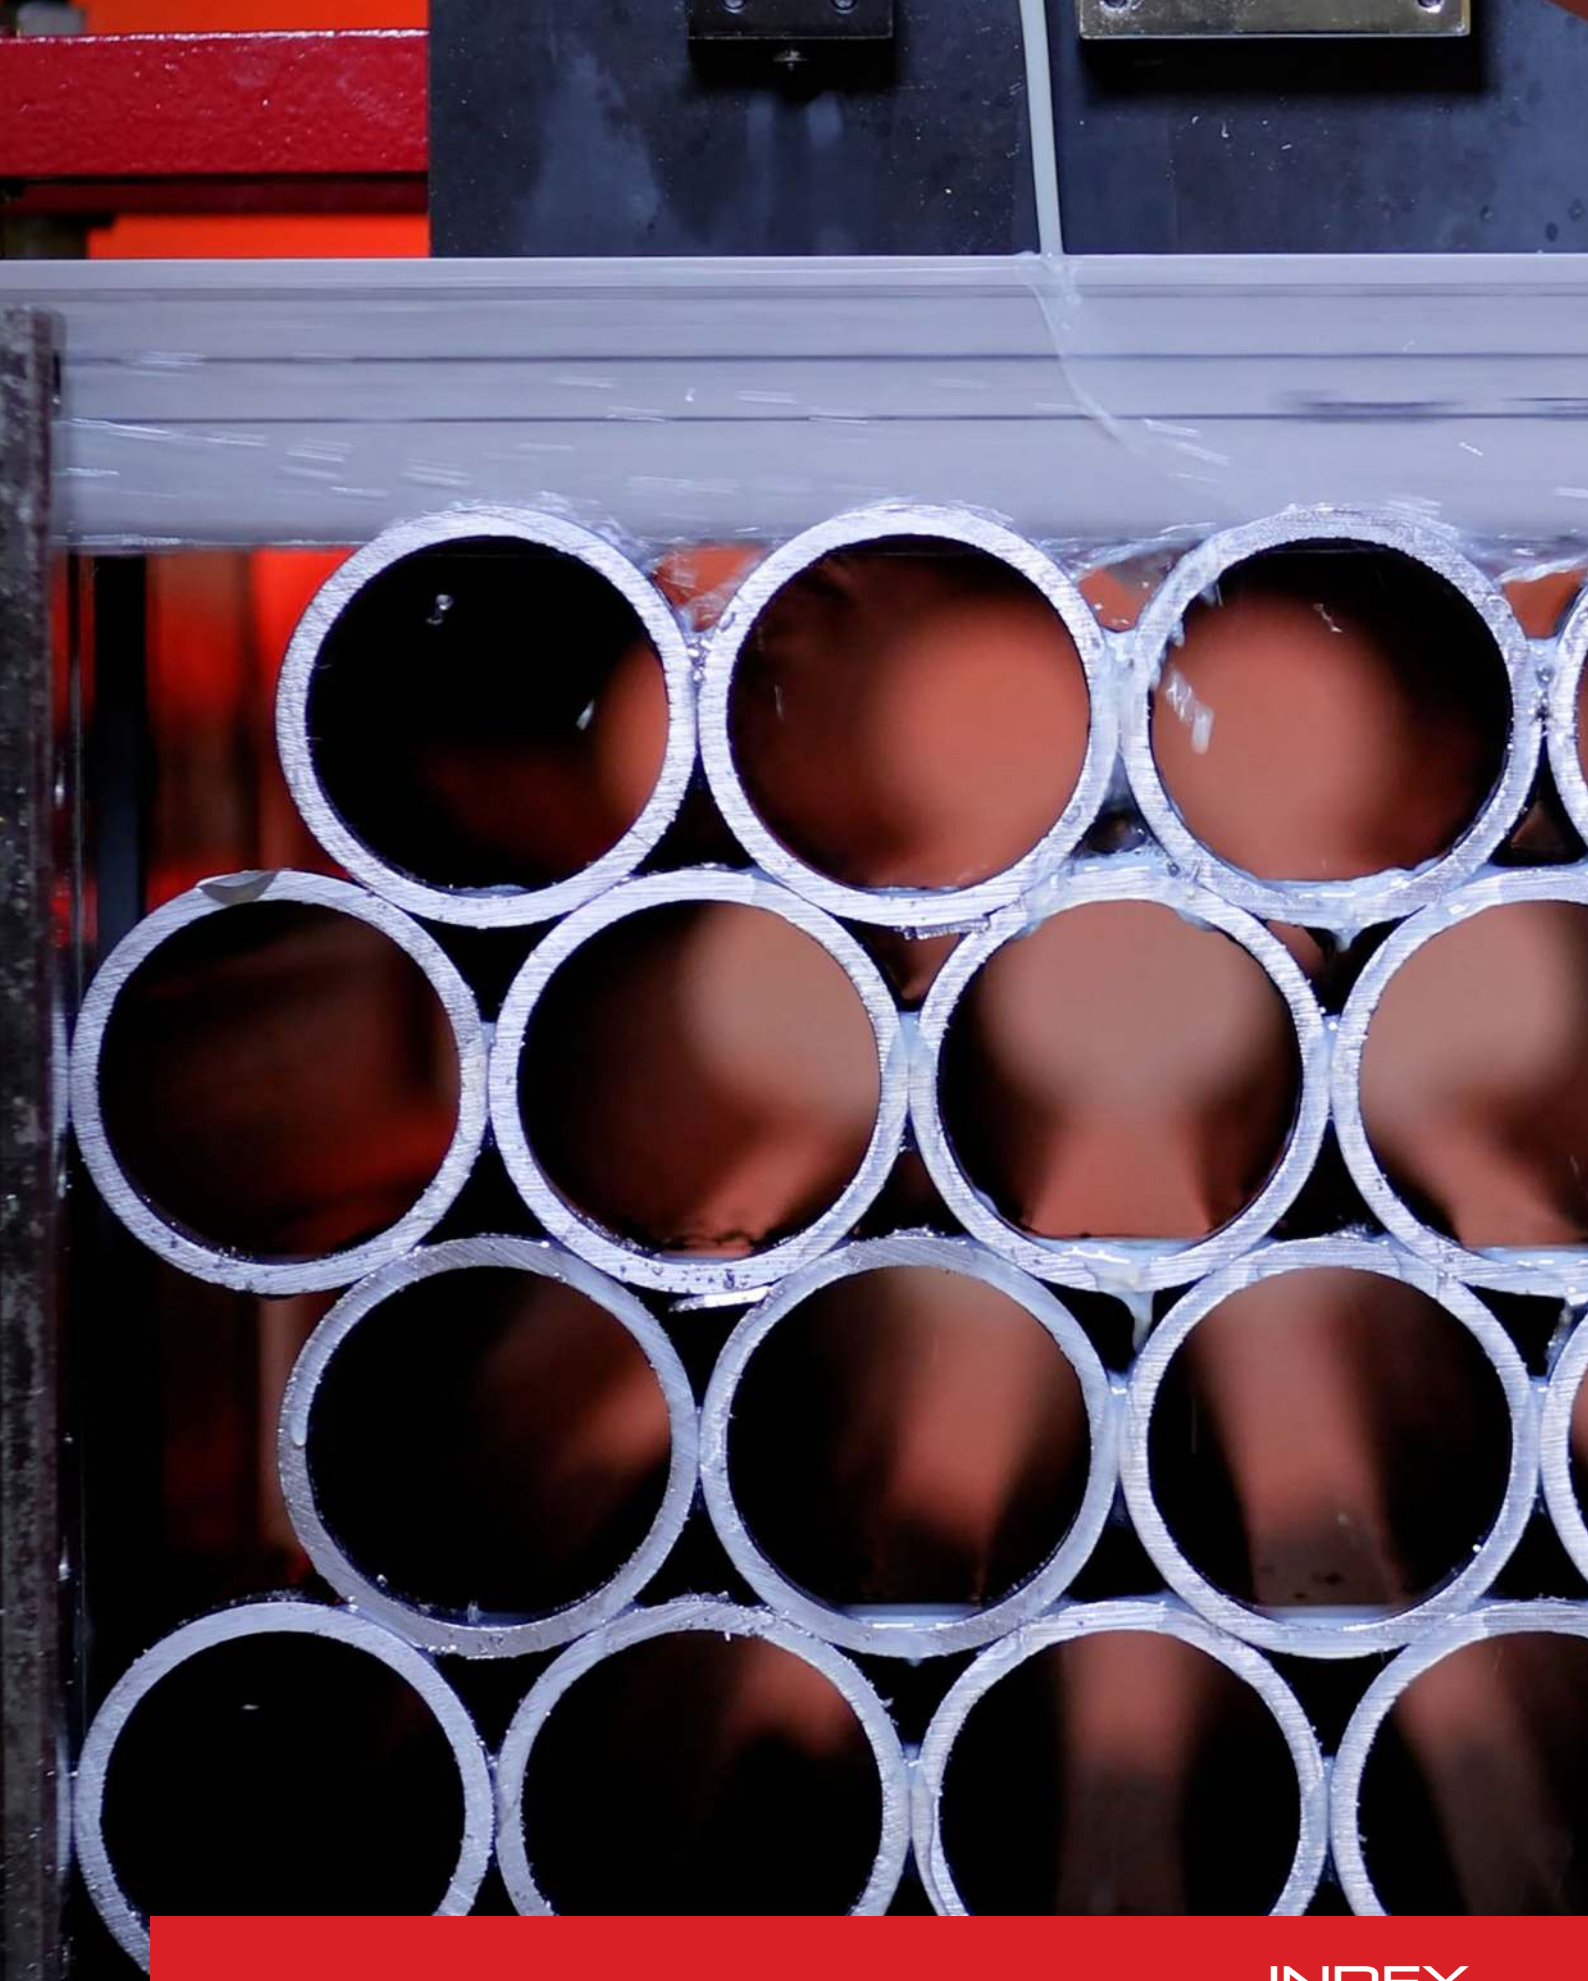

INDEX

A

Accessories	62
682EMZ Saw Tension Gage	62
PT92925 Band Saw Alignment Gage	62
S7793Z Pocket Laser Tachometer Kit	62

B

Band Knives	40
Bi-Metal	17–24
TENNAX™-PRO	19
Primalloy™	20
Intenss™ PRO-VTH	21
Intenss™ PRO	22
Intenss™ PRO-DIE	23
Intenss™	24

C

Carbide Tipped	27–32
Advanz™ CS	31
Advanz™ FS	32
Advanz™ MC5	29
Advanz™ MC7	28
Advanz™ TS	30
Carbide Grit / Diamond Grit	33–35
Advanz™ CG	34
Advanz™ DG	35
Carbon	36–40
Duratec™ FC	39
Duratec™ SFB	37–38

F

Food Processing	47–52
CarcassKutter™ Premium (CKP)	50
Meatkutter™ Frozen Bi-Metal (MKB)	52
Meatkutter™ Frozen (MKF)	51
Meatkutter™ Premium (MKP)	48
Meatkutter™ Stainless (MKS)	49

P

Portaband	26
Univerz™	25
Power Hacksaws	53–57
Bi-Metal HSS-BS	54–55
High-speed steel-RS	56–57

R

Recommendations	60–61
Resources	63–65
Band Saw Blade Reference Guide	63
Website	63
YouTube	63
Cutting Rate Chart	64–65

T

Technical Assistance	15
-----------------------------------	-----------

W

Wood Cutting	41–45
Woodpecker™ Premium	43
Woodpecker™ Pro	44
Woodpecker™ CT	45

682EMZ	Saw Tension Gage	62	91434	Duratec™ SFB Band Saw	38
10079	Duratec™ SFB Band Saw	38	91435	Duratec™ SFB Band Saw	38
91050	Duratec™ SFB Band Saw	38	91450	Duratec™ SFB Band Saw	38
91060	Duratec™ SFB Band Saw	38	91471	Duratec™ SFB Band Saw	38
91080	Duratec™ SFB Band Saw	38	91510	Duratec™ SFB Band Saw	38
91090	Duratec™ SFB Band Saw	38	91515	Duratec™ SFB Band Saw	38
91120	Duratec™ SFB Band Saw	38	91528	Duratec™ SFB Band Saw	38
91130	Duratec™ SFB Band Saw	38	91529	Duratec™ SFB Band Saw	38
91140	Duratec™ SFB Band Saw	38	91531	Duratec™ SFB Band Saw	38
91147	Duratec™ SFB Band Saw	38	91550	Duratec™ SFB Band Saw	38
91151	Duratec™ SFB Band Saw	38	91570	Duratec™ SFB Band Saw	38
91161	Duratec™ SFB Band Saw	38	91621	Duratec™ SFB Band Saw	38
91181	Duratec™ SFB Band Saw	38	91622	Duratec™ SFB Band Saw	38
91190	Duratec™ SFB Band Saw	38	91670	Duratec™ SFB Band Saw	38
91204	Duratec™ SFB Band Saw	38	91680	Duratec™ SFB Band Saw	38
91210	Duratec™ SFB Band Saw	38	91689	Duratec™ SFB Band Saw	38
91230	Duratec™ SFB Band Saw	38	91695	Duratec™ SFB Band Saw	38
91240	Duratec™ SFB Band Saw	38	91696	Duratec™ SFB Band Saw	38
91250	Duratec™ SFB Band Saw	38	91701	Duratec™ SFB Band Saw	38
91261	Duratec™ SFB Band Saw	38	91720	Duratec™ SFB Band Saw	38
91264	Duratec™ SFB Band Saw	38	91726	Duratec™ FC Band Saw	39
91265	Duratec™ SFB Band Saw	38	91730	Duratec™ SFB Band Saw	38
91271	Duratec™ SFB Band Saw	38	91740	Duratec™ FC Band Saw	39
91281	Duratec™ SFB Band Saw	38	91761	Duratec™ SFB Band Saw	38
91291	Duratec™ SFB Band Saw	38	91769	Duratec™ FC Band Saw	39
91300	Duratec™ SFB Band Saw	38	91930	Duratec™ SFB Band Saw	38
91307	Duratec™ SFB Band Saw	38	91992	Woodpecker™ Premium Band Saw	43
91330	Duratec™ SFB Band Saw	38	91996	Woodpecker™ Premium Band Saw	43
91340	Duratec™ SFB Band Saw	38	91997	Woodpecker™ Premium Band Saw	43
91350	Duratec™ SFB Band Saw	38	92000	Woodpecker™ Premium Band Saw	43
91361	Duratec™ SFB Band Saw	38	92001	Woodpecker™ Premium Band Saw	43
91372	Duratec™ SFB Band Saw	38	92002	Woodpecker™ Premium Band Saw	43
91373	Duratec™ SFB Band Saw	38	92003	Woodpecker™ Premium Band Saw	43
91374	Duratec™ SFB Band Saw	38	92004	Woodpecker™ Premium Band Saw	43
91380	Duratec™ SFB Band Saw	38	92007	Woodpecker™ Premium Band Saw	43
91401	Duratec™ SFB Band Saw	38	92010	Woodpecker™ Premium Band Saw	43
91420	Duratec™ SFB Band Saw	38	92017	Woodpecker™ Premium Band Saw	43
91430	Duratec™ SFB Band Saw	38	92018	Woodpecker™ Premium Band Saw	43

92022	Woodpecker™ Premium Band Saw	43	92550	Advanz™ FS Band Saw	32
92026	Woodpecker™ Premium Band Saw	43	92552	Advanz™ FS Band Saw	32
92030	Woodpecker™ Premium Band Saw	43	92553	Advanz™ FS Band Saw	32
92035	Woodpecker™ Premium Band Saw	43	92555	Advanz™ FS Band Saw	32
92036	Woodpecker™ Premium Band Saw	43	92559	Advanz™ TS Band Saw	30
92100	Woodpecker™ Pro Band Saw	44	92560	Advanz™ TS Band Saw	30
92101	Woodpecker™ Pro Band Saw	44	92561	Advanz™ TS Band Saw	30
92102	Woodpecker™ Pro Band Saw	44	92563	Advanz™ TS Band Saw	30
92103	Woodpecker™ Pro Band Saw	44	92564	Advanz™ CS Band Saw	31
92104	Woodpecker™ Pro Band Saw	44	92565	Advanz™ CS Band Saw	31
92105	Woodpecker™ Pro Band Saw	44	92569	Advanz™ TS Band Saw	30
92106	Woodpecker™ Pro Band Saw	44	92570	Advanz™ CS Band Saw	31
92108	Woodpecker™ Pro Band Saw	44	92571	Advanz™ TS Band Saw	30
92109	Woodpecker™ Pro Band Saw	44	92572	Advanz™ MC5 Band Saw	29
92110	Woodpecker™ Pro Band Saw	44	92573	Advanz™ MC7 Band Saw	28
92111	Woodpecker™ Pro Band Saw	44	92574	Advanz™ MC5 Band Saw	29
92200	Woodpecker™ CT Band Saw	45	92575	Advanz™ MC7 Band Saw	28
92204	Woodpecker™ CT Band Saw	45	92576	Advanz™ CS Band Saw	31
92205	Woodpecker™ CT Band Saw	45	92577	Advanz™ MC5 Band Saw	29
92201	Woodpecker™ CT Band Saw	45	92578	Advanz™ MC7 Band Saw	28
92206	Woodpecker™ CT Band Saw	45	92580	Advanz™ MC5 Band Saw	29
92202	Woodpecker™ CT Band Saw	45	92581	Advanz™ MC7 Band Saw	28
92207	Woodpecker™ CT Band Saw	45	92582	Advanz™ MC7 Band Saw	28
92203	Woodpecker™ CT Band Saw	45	92583	Advanz™ MC7 Band Saw	28
92500	Advanz™ TS Band Saw	30	92584	Advanz™ MC7 Band Saw	28
92503	Advanz™ TS Band Saw	30	92585	Advanz™ MC5 Band Saw	29
92504	Advanz™ TS Band Saw	30	92586	Advanz™ MC5 Band Saw	29
92507	Advanz™ FS Band Saw	32	92592	Advanz™ CS Band Saw	31
92509	Advanz™ TS Band Saw	30	92594	Advanz™ MC7 Band Saw	28
92513	Advanz™ FS Band Saw	32	92595	Advanz™ MC7 Band Saw	28
92515	Advanz™ TS Band Saw	30	92598	Advanz™ MC5 Band Saw	29
92516	Advanz™ TS Band Saw	30	93126	Band Knife	40
92517	Advanz™ TS Band Saw	30	93135	Band Knife	40
92521	Advanz™ TS Band Saw	30	93160	Band Knife	40
92528	Advanz™ TS Band Saw	30	93189	Band Knife	40
92533	Advanz™ MC5 Band Saw	29	93388	Band Knife	40
92545	Advanz™ MC5 Band Saw	29	93580	Band Knife	40
92546	Advanz™ FS Band Saw	32	93590	Band Knife	40

93609	Band Knife	40	95123	Advanz™ DG Saw Blade	35
93629	Band Knife	40	95124	Advanz™ DG Saw Blade	35
93637	Band Knife	40	95125	Advanz™ DG Saw Blade	35
93715	Band Knife	40	95126	Advanz™ DG Saw Blade	35
93717	Band Knife	40	95127	Advanz™ DG Saw Blade	35
93794	Band Knife	40	95128	Advanz™ DG Saw Blade	35
93796	Band Knife	40	95129	Advanz™ DG Saw Blade	35
93806	Band Knife	40	95243	Advanz™ DG Saw Blade	35
93809	Band Knife	40	95244	Advanz™ DG Saw Blade	35
93912	Band Knife	40	95245	Advanz™ DG Saw Blade	35
94310	Meatkutter™ Premium Band Saw (MKP)	48	95246	Advanz™ DG Saw Blade	35
94311	Meatkutter™ Premium Band Saw (MKP)	48	95247	Advanz™ DG Saw Blade	35
94312	Meatkutter™ Premium Band Saw (MKP)	48	95248	Advanz™ DG Saw Blade	35
94314	Meatkutter™ Premium Band Saw (MKP)	48	95249	Advanz™ DG Saw Blade	35
94315	Meatkutter™ Premium Band Saw (MKP)	48	95250	Advanz™ DG Saw Blade	35
94316	Meatkutter™ Premium Band Saw (MKP)	48	95251	Advanz™ DG Saw Blade	35
94317	Meatkutter™ Premium Band Saw (MKP)	48	95252	Advanz™ DG Saw Blade	35
94318	Meatkutter™ Premium Band Saw (MKP)	48	95253	Advanz™ DG Saw Blade	35
94319	Meatkutter™ Premium Band Saw (MKP)	48	95254	Advanz™ DG Saw Blade	35
94321	Meatkutter™ Stainless Band Saw (MKS)	49	95255	Advanz™ DG Saw Blade	35
94322	Meatkutter™ Stainless Band Saw (MKS)	49	95256	Advanz™ DG Saw Blade	35
94325	Meatkutter™ Premium Band Saw (MKP)	48	95257	Advanz™ DG Saw Blade	35
94326	Meatkutter™ Premium Band Saw (MKP)	48	95258	Advanz™ DG Saw Blade	35
94328	Meatkutter™ Premium Band Saw (MKP)	48	95259	Advanz™ DG Saw Blade	35
94357	Meatkutter™ Frozen Band Saw (MKF)	51	95260	Advanz™ DG Saw Blade	35
94360	Meatkutter™ Frozen Band Saw (MKF)	51	95401	Advanz™ CG Saw Blade	34
94361	Meatkutter™ Frozen Band Saw (MKF)	51	95403	Advanz™ CG Saw Blade	34
94362	Meatkutter™ Frozen Band Saw (MKF)	51	95404	Advanz™ CG Saw Blade	34
94363	Meatkutter™ Frozen Band Saw (MKF)	51	95406	Advanz™ CG Saw Blade	34
94364	Meatkutter™ Frozen Band Saw (MKF)	51	95407	Advanz™ CG Saw Blade	34
94365	Meatkutter™ Frozen Band Saw (MKF)	51	95408	Advanz™ CG Saw Blade	34
94366	Meatkutter™ Frozen Band Saw (MKF)	51	95410	Advanz™ CG Saw Blade	34
94367	Meatkutter™ Frozen Band Saw (MKF)	51	95414	Advanz™ CG Saw Blade	34
94368	Meatkutter™ Frozen Band Saw (MKF)	51	95416	Advanz™ CG Saw Blade	34
94370	CarcassKutter™ Premium Band Saw (CKP)	50	95417	Advanz™ CG Saw Blade	34
94371	CarcassKutter™ Premium Band Saw (CKP)	50	95418	Advanz™ CG Saw Blade	34
94380	Meatkutter™ Frozen Bi-Metal Band Saw (MKB)	52	95419	Advanz™ CG Saw Blade	34
95122	Advanz™ DG Saw Blade	35	95421	Advanz™ CG Saw Blade	34

95422	Advanz™ CG Saw Blade	34	99192	Intenss™ Band Saw Blade	24
95423	Advanz™ CG Saw Blade	34	99193	Intenss™ Band Saw Blade	24
95425	Advanz™ CG Saw Blade	34	99195	Intenss™ Band Saw Blade	24
95430	Advanz™ CG Saw Blade	34	99197	Intenss™ Band Saw Blade	24
95431	Advanz™ CG Saw Blade	34	99198	Intenss™ Band Saw Blade	24
95432	Advanz™ CG Saw Blade	34	99199	Intenss™ Band Saw Blade	24
95440	Advanz™ CG Saw Blade	34	99206	Intenss™ PRO Band Saw Blade	22
99078	Intenss™ PRO-DIE Band Saw	23	99231	Intenss™ Band Saw Blade	24
99079	Intenss™ PRO-DIE Band Saw	23	99238	Intenss™ Band Saw Blade	24
99080	Intenss™ PRO-DIE Band Saw	23	99282	Intenss™ Band Saw Blade	24
99087	Intenss™ PRO-DIE Band Saw	23	99297	Intenss™ Band Saw Blade	24
99093	Intenss™ PRO-DIE Band Saw	23	99302	Intenss™ Band Saw Blade	24
99102	Intenss™ PRO-DIE Band Saw	23	99303	Intenss™ Band Saw Blade	24
99109	Intenss™ Band Saw Blade	24	99304	Intenss™ Band Saw Blade	24
99122	Intenss™ PRO-DIE Band Saw	23	99307	Intenss™ Band Saw Blade	24
99124	Intenss™ PRO-DIE Band Saw	23	99318	Intenss™ PRO Band Saw Blade	22
99125	Intenss™ PRO-DIE Band Saw	23	99331	Intenss™ Band Saw Blade	24
99143	Intenss™ PRO-DIE Band Saw	23	99411	Intenss™ Band Saw Blade	24
99144	Intenss™ PRO-DIE Band Saw	23	99423	Intenss™ Band Saw Blade	24
99151	Intenss™ PRO-DIE Band Saw	23	99424	Intenss™ Band Saw Blade	24
99152	Intenss™ PRO-DIE Band Saw	23	99425	Intenss™ Band Saw Blade	24
99154	Intenss™ PRO-DIE Band Saw	23	99430	Intenss™ Band Saw Blade	24
99165	Intenss™ PRO-DIE Band Saw	23	99434	Intenss™ Band Saw Blade	24
99167	Intenss™ PRO-DIE Band Saw	23	99500	Intenss™ PRO Band Saw Blade	22
99171	Univerz™ Coil Stock	25	99567	TENNAX™-PRO Band Saw Blade	19
99176	Intenss™ Band Saw Blade	24	99568	TENNAX™-PRO Band Saw Blade	19
99178	Intenss™ PRO-DIE Band Saw	23	99569	TENNAX™-PRO Band Saw Blade	19
99179	Univerz™ Coil Stock	25	99570	TENNAX™-PRO Band Saw Blade	19
99180	Univerz™ Coil Stock	25	99571	TENNAX™-PRO Band Saw Blade	19
99181	Intenss™ Band Saw Blade	24	99572	TENNAX™-PRO Band Saw Blade	19
99182	Univerz™ Coil Stock	25	99573	TENNAX™-PRO Band Saw Blade	19
99184	Univerz™ Coil Stock	25	99574	TENNAX™-PRO Band Saw Blade	19
99185	Intenss™ Band Saw Blade	24	99575	TENNAX™-PRO Band Saw Blade	19
99186	Intenss™ PRO-DIE Band Saw	23	99576	TENNAX™-PRO Band Saw Blade	19
99187	Univerz™ Coil Stock	25	99577	TENNAX™-PRO Band Saw Blade	19
99188	Intenss™ PRO-DIE Band Saw	23	99578	TENNAX™-PRO Band Saw Blade	19
99190	Intenss™ PRO-DIE Band Saw	23	99579	TENNAX™-PRO Band Saw Blade	19
99191	Intenss™ PRO Band Saw Blade	22	99580	TENNAX™-PRO Band Saw Blade	19

99581	TENNAX™-PRO Band Saw Blade	19	99938	Intenss™ PRO Band Saw Blade	22
99582	TENNAX™-PRO Band Saw Blade	19	99941	Intenss™ PRO Band Saw Blade	22
99583	TENNAX™-PRO Band Saw Blade	19	99942	Intenss™ PRO Band Saw Blade	22
99584	TENNAX™-PRO Band Saw Blade	19	99943	Intenss™ PRO Band Saw Blade	22
99585	TENNAX™-PRO Band Saw Blade	19	99947	Intenss™ PRO Band Saw Blade	22
99586	TENNAX™-PRO Band Saw Blade	19	99949	Intenss™ PRO-VTH Band Saw Blade	21
99587	TENNAX™-PRO Band Saw Blade	19	99950	Intenss™ PRO-VTH Band Saw Blade	21
99588	TENNAX™-PRO Band Saw Blade	19	99954	Intenss™ PRO-VTH Band Saw Blade	21
99589	TENNAX™-PRO Band Saw Blade	19	99962	Intenss™ PRO Band Saw Blade	22
99590	TENNAX™-PRO Band Saw Blade	19	99965	Intenss™ PRO Band Saw Blade	22
99591	TENNAX™-PRO Band Saw Blade	19	99967	Intenss™ PRO-VTH Band Saw Blade	21
99801	Primalloy™ Band Saw Blade	20	99993	Intenss™ PRO-VTH Band Saw Blade	21
99803	Primalloy™ Band Saw Blade	20	BM10B	Portaband - Univerz™	26
99804	Primalloy™ Band Saw Blade	20	BM10	Portaband - Univerz™	26
99805	Primalloy™ Band Saw Blade	20	BM14B	Portaband - Univerz™	26
99807	Primalloy™ Band Saw Blade	20	BM14	Portaband - Univerz™	26
99808	Primalloy™ Band Saw Blade	20	BM18B	Portaband - Univerz™	26
99809	Primalloy™ Band Saw Blade	20	BM18	Portaband - Univerz™	26
99902	Intenss™ PRO Band Saw Blade	22	BM24B	Portaband - Univerz™	26
99903	Intenss™ PRO Band Saw Blade	22	BM24	Portaband - Univerz™	26
99905	Intenss™ PRO Band Saw Blade	22	BM1014B	Portaband - Univerz™	26
99906	Intenss™ PRO Band Saw Blade	22	BM1014	Portaband - Univerz™	26
99907	Intenss™ PRO Band Saw Blade	22	BM1418B	Portaband - Univerz™	26
99908	Intenss™ PRO Band Saw Blade	22	BM1418	Portaband - Univerz™	26
99912	Intenss™ PRO Band Saw Blade	22	BS1210-5	Bi-Metal HSS-BS Power Hacksaw	55
99913	Intenss™ PRO Band Saw Blade	22	BS1214-5	Bi-Metal HSS-BS Power Hacksaw	55
99914	Intenss™ PRO Band Saw Blade	22	BS1406-6	Bi-Metal HSS-BS Power Hacksaw	55
99915	Intenss™ PRO Band Saw Blade	22	BS1406-7	Bi-Metal HSS-BS Power Hacksaw	55
99917	Intenss™ PRO Band Saw Blade	22	BS1410-5	Bi-Metal HSS-BS Power Hacksaw	55
99923	Intenss™ PRO Band Saw Blade	22	BS1410-6	Bi-Metal HSS-BS Power Hacksaw	55
99924	Intenss™ PRO Band Saw Blade	22	BS1414-5	Bi-Metal HSS-BS Power Hacksaw	55
99926	Intenss™ PRO Band Saw Blade	22	BS1706-6	Bi-Metal HSS-BS Power Hacksaw	55
99927	Intenss™ PRO Band Saw Blade	22	BS1710-6	Bi-Metal HSS-BS Power Hacksaw	55
99928	Intenss™ PRO Band Saw Blade	22	BS1804-7	Bi-Metal HSS-BS Power Hacksaw	55
99931	Intenss™ PRO Band Saw Blade	22	BS1806-6	Bi-Metal HSS-BS Power Hacksaw	55
99933	Intenss™ PRO Band Saw Blade	22	BS1806-7	Bi-Metal HSS-BS Power Hacksaw	55
99934	Intenss™ PRO Band Saw Blade	22	BS1810-6	Bi-Metal HSS-BS Power Hacksaw	55
99937	Intenss™ PRO Band Saw Blade	22	CG4CM	Advanz™ CG Portaband	26

PT92925	Band Saw Alignment Gage	62
REB-20	Grinding Wheel for Regrinding	42
REB-22.22	Grinding Wheel for Regrinding	42
RS300-10	High-speed steel-RS Power Hacksaw	57
RS350-6	High-speed steel-RS Power Hacksaw	57
RS350-10	High-speed steel-RS Power Hacksaw	57
RS400-4	High-speed steel-RS Power Hacksaw	57
RS400-6	High-speed steel-RS Power Hacksaw	57
RS400-10	High-speed steel-RS Power Hacksaw	57
RS450-4	High-speed steel-RS Power Hacksaw	57
RS450-6	High-speed steel-RS Power Hacksaw	57
RS450-10	High-speed steel-RS Power Hacksaw	57
RS500-4	High-speed steel-RS Power Hacksaw	57
RS500-6	High-speed steel-RS Power Hacksaw	57
RS500-10	High-speed steel-RS Power Hacksaw	57
RS550-4	High-speed steel-RS Power Hacksaw	57
RS550-6	High-speed steel-RS Power Hacksaw	57
RS550-10	High-speed steel-RS Power Hacksaw	57
RS575-4	High-speed steel-RS Power Hacksaw	57
RS575-6	High-speed steel-RS Power Hacksaw	57
RS600-4	High-speed steel-RS Power Hacksaw	57
RS600-6	High-speed steel-RS Power Hacksaw	57
RS650-4	High-speed steel-RS Power Hacksaw	57
RS650-6	High-speed steel-RS Power Hacksaw	57
RS700-4	High-speed steel-RS Power Hacksaw	57
RS700-6	High-speed steel-RS Power Hacksaw	57
RS850-4	High-speed steel-RS Power Hacksaw	57
RS850-6	High-speed steel-RS Power Hacksaw	57
RS900-2.1/2A	High-speed steel-RS Power Hacksaw	57
RS1000-2 1/2	High-speed steel-RS Power Hacksaw	57
S7793Z	Pocket Laser Tachometer Kit	62

CORPORATE HEADQUARTERS AND MAIN FACTORY

THE L.S. STARRETT COMPANY

121 Crescent Street
Athol, MA 01331-1915 - U.S.A.

Tel: (978) 249-3551

Main Fax: (978) 249-8495

INTERNATIONAL LOCATIONS

BRAZIL

Starrett Indústria e Comércio Ltda.
Av. Laro S. Starrett 1880 - Bairro Pinheirinho
Caixa Postal 171
13306-900 Itu, São Paulo - Brazil

Tel: 55 11 2118-8200

Fax: 55 11 2118-8003

SCOTLAND

The L.S. Starrett Company Ltd.
Jedburgh TD8 6LR - Scotland

Tel: 44 (0) 1835 863501

Fax: 44 (0) 1835 863018

CHINA

Starrett Tools (Suzhou) Company Limited
Suzhou Industrial Park
No. 339. Su Hong Zhong Road
Suzhou, Jiangsu Province
P.R. China 215021

Tel: 86 512 6741940

Fax: 86 512 67415697



STARRETT PRODUCT LINES

Band Saw Blades

Force Measurement

Jobsite & Workshop Tools

Laser Measurement

Metrology Equipment

Precision Granite

Precision Ground Solutions

Precision Measuring Tools

Power Tool Accessories

Hand Tools

Service

Webber Gage Blocks

BAND SAW BLADES



starrett.com

Follow us!



Starrett®

Phone: (978) 249-3551 | Fax: (978) 249-8495
121 Crescent Street-Athol, MA 01331-1915-USA

Catalog 60R Band Saw Blades 05/25 PDF The L.S. Starrett Company © 2025 Specifications subject to change.