




### Standard Construction Features

Belt Type: Micro-V  
 Core Material: Oil & Heat Resistant (chloroprene)  
 Cord/Tensile: Polyester

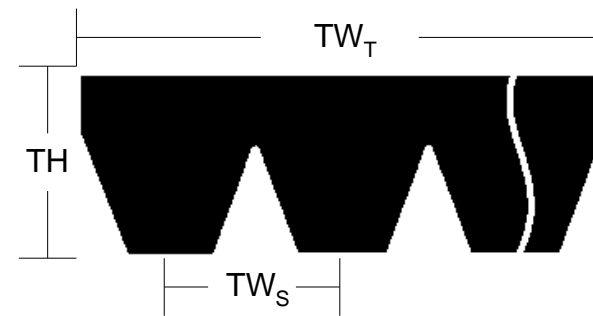

### Belt Section


Cross Section	Effective Length (in)	TW <sub>S</sub> (in)	TH (in)	TW <sub>T</sub> (in)	Strands
L - Industrial	50.00 +0.20 -0.40	3/16	1/4	1 1/8	6

### Measuring Information

\* T (lb) is per belt/rib/strand

Y (in)	T* (lb)	G min (in)	W (in)	Angle (°)	O.D. (in)	O.C. (in)	Max Ride (in)	S (in)
15.000 +0.100 -0.200	45	0.196		40	6.366	20.000	NA	0.185

Reference RMA IP-26 L Section for the industry standard governing this belt.

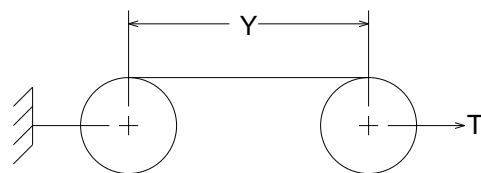

**DesignView™**  
 Version 1.0 -  
 Belt Information Sheet

Created 22 Jun 2017 by Gates

Created for

**Micro-V - L - Industrial**

Gates Product Number

9173-05006

Customer Part Number

500L6

The length shall be measured by placing the belts on two sheaves of equal diameters that have been grooved in accordance with standard specifications and rotated at least three complete turns with the specified tension so that each strand receives half the total tension. The length will be that length obtained by adding the Reference Circumference of one sheave at dimension 'W' to twice the center distance (dimension 'Y').