



Duty: Varies

Rolling Elements: Ball

Housing: Ductile Iron Hanger Bearing



Self Alignment: +/- 2 Degrees

Lock: Setscrew

Seal: Felt

Optional Seal: Contact

Temperature: -20° to 220°F

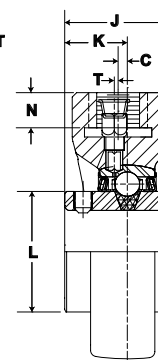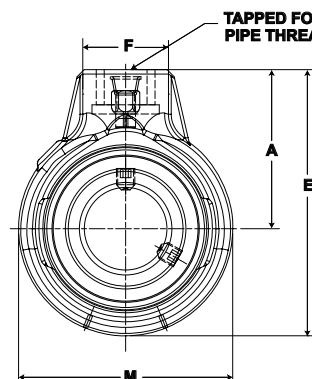

SCHB Series Hanger Bearing Internal Lube - Setscrew Locking

Bore Diameter		Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch / mm								Pipe Tap* N.P.S.M.	N Thread Length	T Brg. To Lub. Ftg. Centers	Unit Wt. lb/kg
inch	mm				A	C	E	F	J	K	L	M				
15/16	25	SCHB-15	3-015													
1		SCHB-305	5305	4381	2 1/2	-	4 1/16	1 9/16	1 1/2	7/8	1 19/32	3 1/8	3/4 - 14	13/16	◇ 7/32	2.2
1 1/16	30	SCHB-16	3-1	19487	63.5		103.2	39.7	38.1	22.2	40.5	79.4		0.37	0.10	1.00
		SCHB-18	2-12													
		SCHB-206	5206													
1 3/16		SCHB-19	3-13													
1 1/4		SCHB-20	2-14	5782	2 3/4	-	4 9/16	1 9/16	1 11/16	1	1 55/64	3 5/8	3/4 - 14	3/4	◇ 1/4	3.1
1 5/16		SCHB-21	2-15	25718	69.9		115.9	39.7	42.9	25.4	47.2	92.1		0.34	0.11	1.41
1 3/8	35	SCHB-22	2-16													
		SCHB-207	5207													
1 7/16		SCHB-23	3-17													
1 1/2		SCHB-24	2-18	7340	2 7/8	3/32	4 3/4	1 9/16	1 15/16	1 3/16	2 1/16	3 3/4	3/4 - 14	3/4	◇ 19/64	3.4
1 9/16	40	SCHB-25	2-19	32648	73.0	2.4	120.7	39.7	49.2	30.2	52.4	95.3		0.34	0.13	1.54
		SCHB-208	5208													
1 11/16		SCHB-27	3-111													
1 3/4		SCHB-28	3-112													
1 7/8		SCHB-30	2-114	7889	3 1/4	3/16	5 7/16	1 7/8	2 1/32	1 9/32	2 15/32	4 3/8	1 - 11 1/2	13/16	17/64	4.5
1 15/16		SCHB-31	2-115	35090	82.6	4.8	138.1	47.6	51.6	32.5	62.7	111.1		0.37	0.12	2.04
2	50	SCHB-32R	1-2													
		SCHB-210	5210													
2 3/16		SCHB-35	3-23													
2 1/4		SCHB-36	2-24	11789	4	11/32	6 13/16	2 5/16	2 9/16	1 9/16	2 63/64	5 5/8	1 1/4 - 11 1/2	1 1/8	21/64	9.0
2 3/8		SCHB-38	2-26	52437	101.6	8.7	173.0	58.7	65.1	39.7	75.8	142.9		0.51	0.15	4.08
2 7/16	60	SCHB-39	2-27													
		SCHB-212	5212													
2 11/16		SCHB-43	3-211													
2 7/8		SCHB-46	2-214	14839	4 5/8	3/8	7 7/8	2 3/4	3 1/16	1 3/4	3 41/64	6 1/2	1 1/2 - 11 1/2	1 1/4	3/8	14.6
2 15/16		SCHB-47	2-215	66004	117.5	9.5	200.0	69.9	77.8	44.5	92.5	165.1		0.57	0.17	6.62
	75	SCHB-215	5215													
3 3/16		SCHB-51	2-33	17412	4 7/8	5/16	8 5/16	2 13/16	3 1/4	1 15/16	3 59/64	6 7/8	1 1/2 - 11 1/2	1 1/4	13/32	16.8
	80	SCHB-216	5216	77449	123.8	7.9	211.1	71.4	82.6	49.2	99.6	174.6		0.57	0.18	7.62
3 15/16		SCHB-63	3-315													
4		SCHB-64	3-4	29905	8 1/8		13 1/4	4 3/8	4 5/8	2 11/16	5 11/64	10 1/4	2 1/2 - 8 1/2	2 5/8	19/32	62
	100	SCHB-320	5320	133017	206.4		336.6	111.1	117.5	68.3	131.4	260.4		1.19	0.27	28.12

For Standard Duty Bearing inserts-Single Lock see page G-92.

◇ No Adapter or Fitting

*Use Straight Pipe Thread

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.